

2015



# Lifting Product Catalog

Strength Through Innovation Since 1764




**GUNNEBO**  
Industries

# Roundsling Hook RH

The RH-hook is the perfect load connection solution, combining the advantages of both soft lifting slings and grade 100 components. It can be inserted in any softsling and is quicker and safer to use than the commonly used shackle. The RH-hook is a connector as well as a hook, which gives the user increased flexibility, safer use and increased durability of the soft slings.

The RH-hook comes with a blocking pin, but thanks to the narrow opening it may be used without blocking pin.


The roundsling hooks are colour coded in order to match the corresponding size of the roundsling: Red=5T / Yellow=3T / Green=2T / Violet=1T

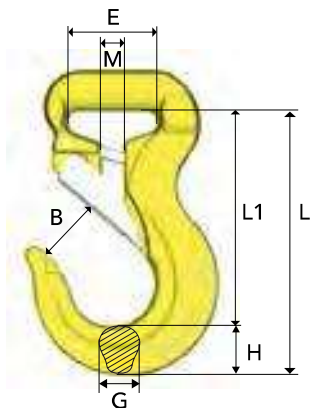


| Art. no. | Code    | WLL tonnes* | B  | E  | G  | L   | H  | M    | Weight kgs |
|----------|---------|-------------|----|----|----|-----|----|------|------------|
| B14490   | RH-1-10 | 1           | 24 | 35 | 17 | 84  | 19 | 8    | 0.5        |
| B14491   | RH-2-10 | 2           | 28 | 40 | 17 | 96  | 22 | 10   | 0.7        |
| B14492   | RH-3-10 | 3           | 33 | 47 | 24 | 117 | 30 | 12   | 1.3        |
| B14493   | RH-5-10 | 5           | 43 | 73 | 27 | 155 | 36 | 16.5 | 3.2        |

## Master Link M

| Art. no. | Code        | WLL tonnes* | L   | E   | D  | Weight kgs |
|----------|-------------|-------------|-----|-----|----|------------|
| Z101271  | M-6-10      | 1.25        | 100 | 60  | 11 | 0.2        |
| Z101272  | M-86-10     | 2.5         | 125 | 70  | 14 | 0.4        |
| Z101273  | M-108-10    | 4.0         | 140 | 80  | 17 | 0.8        |
| Z101274  | M-13-10     | 5.4         | 150 | 90  | 19 | 1.0        |
| Z101267  | M-1310-10   | 7.5         | 160 | 95  | 22 | 1.5        |
| Z101268  | M-1613-10   | 10.0        | 190 | 110 | 28 | 2.8        |
| Z101247  | M-19-10     | 12.0        | 200 | 120 | 30 | 3.5        |
| Z101269  | M-2016-10   | 17.0        | 240 | 140 | 34 | 5.2        |
| Z101270  | M-2220-10   | 25.0        | 250 | 150 | 40 | 7.3        |
| Z101275  | M-2622-10   | 28.0        | 250 | 150 | 42 | 8.7        |
| Z101284  | M-32-10     | 33.0        | 300 | 180 | 45 | 11.7       |
| Z101276  | M-3226-10   | 43.0        | 300 | 200 | 50 | 14.8       |
| Z101277  | M-3632-10   | 56.0        | 350 | 200 | 55 | 20.7       |
| Z101278  | M-4536-10   | 70.0        | 375 | 210 | 60 | 26.4       |
| Z101279  | M-90T-10    | 90.0        | 450 | 250 | 70 | 42.8       |
| Z101280  | M-125T-10** | 125.0       | 450 | 260 | 80 | 57.0       |

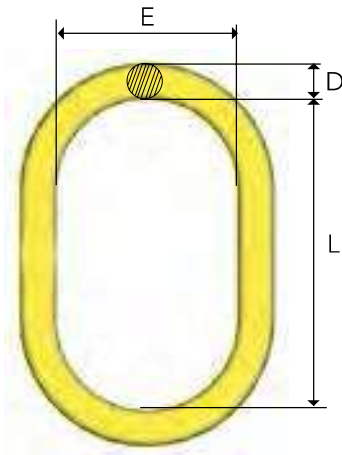


\*\* Dimension L and E not acc. to EN 1677-4.

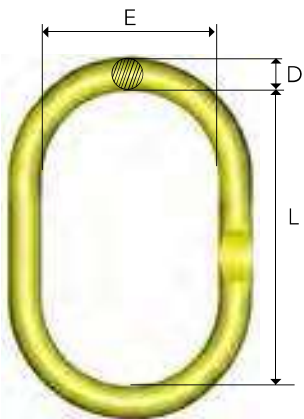

Master Link MF

For 1-, 2-, 3- and 4-leg slings. 3- and 4 leg chain slings require CLD / CGD


| Art. no. | Code       | WLL<br>tonnes* | For chain size, mm |       |         | L   | E   | D  | Weight<br>kgs |
|----------|------------|----------------|--------------------|-------|---------|-----|-----|----|---------------|
|          |            |                | 1-leg              | 2-leg | 3-4-leg |     |     |    |               |
| B14487   | MF-6-10    | 1.25           | 6                  |       |         | 100 | 60  | 11 | 0.2           |
| B14481   | MF-86-10   | 2.5            | 6, 8               | 6     | -       | 125 | 70  | 14 | 0.4           |
| B14482   | MF-108-10  | 4.0            | 10                 | 8     | 6       | 140 | 80  | 17 | 0.8           |
| B14483   | MF-1310-10 | 7.5            | 13                 | 10    | 8       | 160 | 95  | 22 | 1.5           |
| B14484   | MF-1613-10 | 10.0           | 16                 | 13    | 10      | 190 | 110 | 28 | 2.8           |
| B14485   | MF-2016-10 | 17.0           | 20                 | 16    | 13      | 240 | 140 | 34 | 5.2           |
| B14486   | MF-2220-10 | 25.0           | 22                 | 20    | 16      | 250 | 150 | 40 | 7.3           |

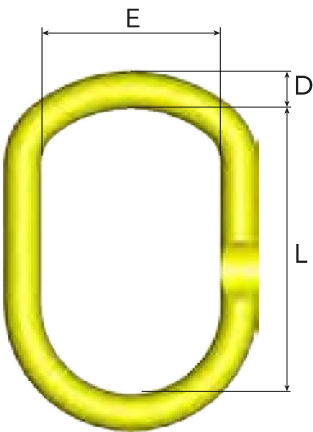

Master Link MFH

Designed for crane hooks, DIN 15401 MAX. 3- and 4 leg chain slings require CLD / CGD


| Art. no. | Code         | WLL<br>tonnes* | For chain size, mm |       |         | L   | E   | D  | DIN<br>15401 | DIN<br>15402 | Weight<br>kgs |
|----------|--------------|----------------|--------------------|-------|---------|-----|-----|----|--------------|--------------|---------------|
|          |              |                | 1-leg              | 2-leg | 3-4 leg |     |     |    |              |              |               |
| Z101262  | MFH-1310-10  | 7.5            | 13                 | 10    | 8       | 230 | 125 | 22 | ≤ 12         | ≤ 16         | 1.9           |
| Z101263  | MFH-1613-10  | 10             | 16                 | 13    | 10      | 250 | 135 | 28 | ≤ 12         | ≤ 16         | 3.2           |
| Z101264  | MFH-2016-10  | 17             | 20                 | 16    | 13      | 280 | 135 | 32 | ≤ 16         | ≤ 20         | 4.6           |
| Z101265  | MFH-2220-10  | 28             | 22                 | 20    | 16      | 320 | 175 | 40 | ≤ 25         | ≤ 32         | 8.6           |
| Z101266  | MFHW-2220-10 | 25             | 22                 | 20    | 16      | 355 | 225 | 40 | ≤ 50         | ≤ 63         | 9.9           |

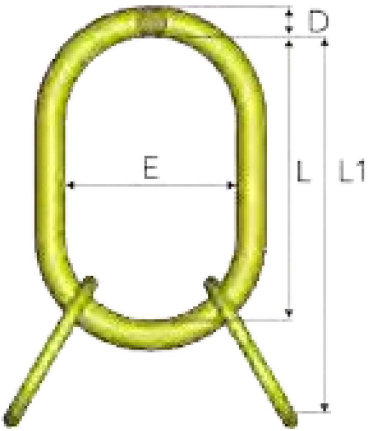

Master Link with Sublinks, MT

Designed for use with chain or wire rope. For 3- and 4-leg slings.

| Art. no. | Code     | WLL<br>tonnes* | L1  | L   | E   | D  | I   | e   | d  | Weight<br>kgs |
|----------|----------|----------------|-----|-----|-----|----|-----|-----|----|---------------|
|          |          |                |     |     |     |    |     |     |    |               |
| Z100902  | MT-6-10  | 3.5            | 270 | 150 | 90  | 19 | 120 | 70  | 14 | 1.8           |
| Z100903  | MT-8-10  | 5.2            | 300 | 160 | 95  | 22 | 140 | 80  | 17 | 3.0           |
| Z101359  | MT-9-10  | 6.9            | 340 | 190 | 110 | 28 | 150 | 90  | 19 | 4.9           |
| Z100904  | MT-10-10 | 11.5           | 360 | 200 | 120 | 30 | 160 | 95  | 22 | 6.4           |
| Z100905  | MT-13-10 | 17             | 450 | 250 | 150 | 40 | 200 | 120 | 30 | 14.2          |
| Z100906  | MT-16-10 | 28             | 500 | 300 | 200 | 50 | 200 | 120 | 32 | 23            |
| Z101074  | MT-20-10 | 35             | 550 | 300 | 200 | 55 | 250 | 150 | 40 | 31.5          |
| Z101281  | MT-22-10 | 53             | 610 | 350 | 200 | 60 | 260 | 140 | 45 | 46            |
| Z101282  | MT-26-10 | 70             | 730 | 450 | 250 | 70 | 280 | 160 | 50 | 71            |
| Z101283  | MT-32-10 | 90             | 750 | 450 | 260 | 80 | 280 | 160 | 55 | 91            |




## Master Link, MFX

Oversized, for 1- and 2-leg slings.

| Art. no. | Code        | WLL<br>tonnes* | For chain<br>1-leg | For chain<br>2-leg | L   | E   | D  | Weight<br>kgs |
|----------|-------------|----------------|--------------------|--------------------|-----|-----|----|---------------|
| Z100550  | MFX-108-10  | 4              | 8, 10              | 8                  | 340 | 180 | 25 | 3.7           |
| Z100551  | MFX-1310-10 | 6.7            | 13                 | 10                 | 340 | 180 | 28 | 4.7           |
| Z100552  | MFX-1613-10 | 10             | 16                 | 13                 | 340 | 180 | 34 | 7.1           |
| Z101125  | MFX-2016-10 | 16             | 20                 | 16                 | 340 | 180 | 40 | 9.6           |


Designed for use with CL, CLD, CG and CGD.

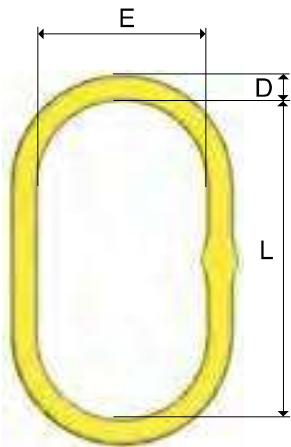

## Master Grab MG

"All-in-one" compact top link.


| Art. no. | Code     | WLL<br>tonnes* | L   | A   | E   | D  | Weight<br>kgs |
|----------|----------|----------------|-----|-----|-----|----|---------------|
| B14710   | MG-6-10  | 1.5            | 145 | 88  | 60  | 15 | 0.5           |
| B14711   | MG-8-10  | 2.5            | 171 | 92  | 60  | 18 | 0.9           |
| B14712   | MG-10-10 | 4              | 211 | 113 | 75  | 22 | 1.8           |
| B14713   | MG-13-10 | 6.7            | 261 | 138 | 90  | 26 | 3.5           |
| B14714   | MG-16-10 | 10             | 311 | 157 | 105 | 31 | 6.1           |

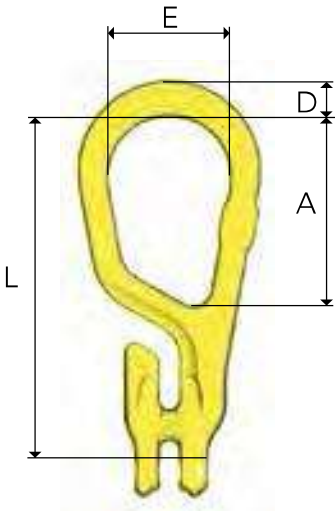

## Master Grab Duo MGD

"All-in-one" compact top link for 2-leg slings.


| Art. no. | Code      | WLL<br>tonnes* | L   | A   | E   | D  | Weight<br>kgs |
|----------|-----------|----------------|-----|-----|-----|----|---------------|
| B14700   | MGD-6-10  | 2.1            | 144 | 90  | 60  | 17 | 0.7           |
| B14701   | MGD-8-10  | 3.5            | 171 | 100 | 75  | 21 | 1.3           |
| B14702   | MGD-10-10 | 5.6            | 211 | 124 | 90  | 24 | 2.3           |
| B14703   | MGD-13-10 | 9.5            | 262 | 149 | 105 | 31 | 5.2           |
| B14704   | MGD-16-10 | 14             | 310 | 175 | 120 | 35 | 7.9           |

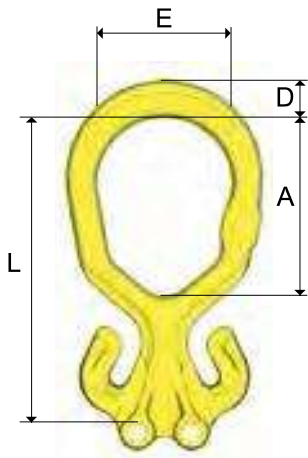

## Coupling Link G

| Art. no. | Code    | WLL<br>tonnes* | L   | B  | F  | A  | C  | Weight<br>kgs |
|----------|---------|----------------|-----|----|----|----|----|---------------|
| Z100821  | G-6-10  | 1.5            | 45  | 15 | 7  | 8  | 16 | 0.1           |
| Z101358  | G-7-10  | 2.0            | 56  | 18 | 9  | 11 | 22 | 0.2           |
| Z100822  | G-8-10  | 2.5            | 56  | 18 | 9  | 11 | 22 | 0.2           |
| Z100823  | G-10-10 | 4.0            | 68  | 25 | 12 | 13 | 26 | 0.3           |
| Z100824  | G-13-10 | 6.7            | 89  | 29 | 15 | 17 | 33 | 0.7           |
| Z100825  | G-16-10 | 10.0           | 106 | 36 | 19 | 20 | 40 | 1.4           |
| Z101119  | G-20-10 | 16.0           | 125 | 43 | 23 | 26 | 44 | 2.2           |
| Z101339  | G-22-10 | 20.0           | 152 | 50 | 26 | 28 | 59 | 3.5           |
| Z101365  | G-26-10 | 27.0           | 161 | 58 | 32 | 34 | 61 | 5.7           |

For larger sizes, see Classic Grade 8

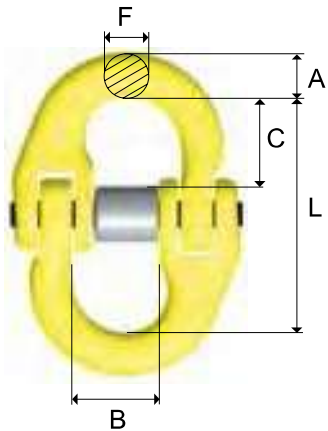


\*Safety factor 4:1




Master Link MF

EN 1677-4



| Art. no. | Code       | WLL tonnes* | L   | E   | D  | Weight kgs |
|----------|------------|-------------|-----|-----|----|------------|
| Z100860  | MF-86-10   | 2.5         | 125 | 70  | 14 | 0.4        |
| Z100861  | MF-108-10  | 4           | 140 | 80  | 17 | 0.8        |
| Z100862  | MF-1310-10 | 7.5         | 160 | 95  | 22 | 1.5        |
| Z100863  | MF-1613-10 | 10          | 190 | 110 | 28 | 2.5        |
| Z100864  | MF-2016-10 | 17          | 240 | 140 | 34 | 5.2        |
| Z100865  | MF-2220-10 | 25          | 250 | 150 | 40 | 7.3        |

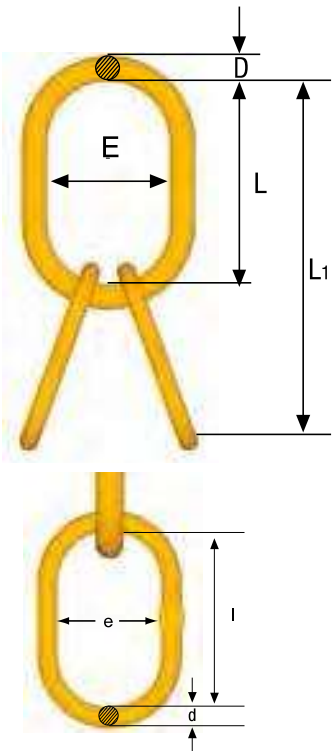

Master Link with Sub Links MT


EN 1677-4

| Art. no. | Code       | WLL tonnes* | For chain 3-4-leg | L1  | L   | E   | D  | I   | e   | d  | Weight kgs |
|----------|------------|-------------|-------------------|-----|-----|-----|----|-----|-----|----|------------|
| Z100888  | MT-6-10**  | 3.5         | 6                 | 270 | 150 | 90  | 19 | 120 | 70  | 14 | 1.8        |
| Z100889  | MT-8-10**  | 5.2         | 7, 8              | 300 | 160 | 95  | 22 | 140 | 80  | 17 | 3          |
| Z100890  | MT-10-10** | 11.5        | 10                | 360 | 200 | 120 | 30 | 160 | 95  | 22 | 6.4        |
| Z100891  | MT-13-10** | 17          | 13                | 450 | 250 | 150 | 40 | 200 | 120 | 30 | 14.2       |
| Z100892  | MT-16-10** | 28          | 16                | 500 | 300 | 200 | 50 | 200 | 120 | 32 | 23         |

\*\* With flattened section for use with BL

Coupling Link G


EN 1677-1

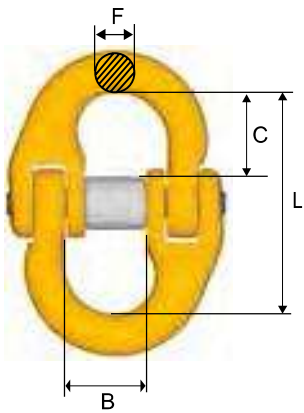

| Art. no. | Code      | WLL tonnes* | For chain dim. | L   | B  | F  | A  | C  | Weight. kgs |
|----------|-----------|-------------|----------------|-----|----|----|----|----|-------------|
| Z622882  | G-6-8     | 1.12        | 6              | 45  | 15 | 7  | 8  | 17 | 0.1         |
| Z279333  | G-7/8-8   | 2           | 7, 8           | 56  | 18 | 9  | 11 | 22 | 0.2         |
| Z279430  | G-10-8    | 3.2         | 10             | 68  | 25 | 9  | 11 | 26 | 0.3         |
| Z279537  | G-13-8    | 5.4         | 13             | 89  | 29 | 12 | 13 | 33 | 0.7         |
| Z279634  | G-16-8    | 8           | 16             | 105 | 36 | 15 | 17 | 40 | 1.2         |
| Z279731  | G-18/20-8 | 12.5        | 19             | 125 | 43 | 19 | 20 | 47 | 1.9         |
| Z279838  | G-22-8    | 15.5        | 22             | 152 | 50 | 23 | 26 | 59 | 3.0         |
| Z349171  | G-26-8    | 21.6        | 26             | 161 | 58 | 26 | 28 | 61 | 5.2         |
| Z349189  | G-32-8    | 32.8        | 32             | 200 | 70 | 32 | 34 | 77 | 9.5         |

Berglok Chain Coupler BL

EN 1677-1



| Art. no. | Code     | WLL tonnes* | For chain dim. | L  | E  | F  | A  | Weight kgs |
|----------|----------|-------------|----------------|----|----|----|----|------------|
| Z622036  | BL-6-8   | 1.12        | 6              | 27 | 20 | 9  | 14 | 0.1        |
| Z195823  | BL-7/8-8 | 2.0         | 7, 8           | 35 | 25 | 11 | 18 | 0.2        |
| Z208022  | BL-10-8  | 3.2         | 10             | 45 | 32 | 14 | 22 | 0.4        |
| Z217820  | BL-13-8  | 5.4         | 13             | 56 | 40 | 17 | 28 | 0.8        |
| Z208226  | BL-16-8  | 8.0         | 16             | 68 | 50 | 22 | 35 | 1.4        |

# Roller-Bearing Swivel, SKLI/SKLU

EN 1677-1

Electrically insulated, lubricated, sealed roller bearing swivel. Fully rotational even at maximum load. Tested to resist 1.000 V. Suitable for protection of overhead cranes during welding operations on suspended loads.

The Gunnebo Industries SKLI is equipped with a heavy duty roller bearing, enabling high durability and safe use also under severe load. It also has heavy duty nylon insulation inside to decrease friction when in use. The SKLI is compatible with the entire Gunnebo Industries SK-range for versatile use.




| Art. no. | Code         | WLL tonnes* | For chain dim. | L   | D   | Weight kgs |
|----------|--------------|-------------|----------------|-----|-----|------------|
| Z100316  | SKLI-7/8-8   | 2           | 7, 8           | 75  | 48  | 0.7        |
| Z100414  | SKLI-10-8    | 3.2         | 10             | 97  | 59  | 1.3        |
| Z100415  | SKLI-13-8    | 5.4         | 13             | 120 | 75  | 2.8        |
| Z100416  | SKLI-16-8    | 8           | 16             | 137 | 90  | 4.6        |
| Z100417  | SKLI-18/20-8 | 12.5        | 19             | 159 | 104 | 7.3        |
| RS16520  | SKLU-22-8*   | 15.5        | 22             | 160 | 109 | 9.2        |
| RS16530  | SKLU-26-8*   | 21.6        | 26             | 207 | 135 | 18.3       |

\* Uninsulated



| Art. no. | Code        | Weight kgs |
|----------|-------------|------------|
| Z700674  | SKA-6-8     | 0.01       |
| Z323624  | SKA-7/8-8   | 0.02       |
| Z318024  | SKA-10-8    | 0.04       |
| Z303822  | SKA-13-8    | 0.08       |
| Z303725  | SKA-16-8    | 0.14       |
| Z145048  | SKA-18/20-8 | 0.26       |
| Z133530  | SKA-22-8    | 0.35       |
| Z605407  | SKA-26-8    | 0.63       |

## Master Link SKG (closed) EN 1677-1

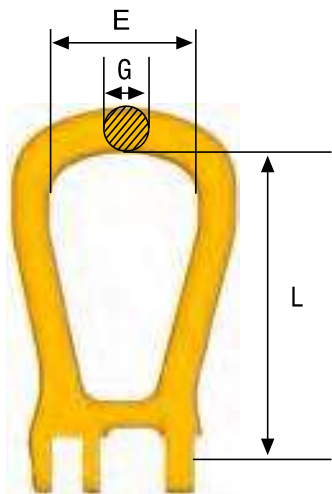


| Art. no. | Code        | WLL tonnes* | For chain dim. | L   | E   | G  | Weight kgs |
|----------|-------------|-------------|----------------|-----|-----|----|------------|
| Z419684  | SKG-7/8-8   | 2           | 7, 8           | 99  | 50  | 14 | 0.3        |
| Z419781  | SKG-10-8    | 3.2         | 10             | 127 | 66  | 18 | 0.6        |
| Z419888  | SKG-13-8    | 5.4         | 13             | 145 | 72  | 22 | 1.1        |
| Z419985  | SKG-16-8    | 8           | 16             | 175 | 82  | 25 | 1.5        |
| Z420086  | SKG-18/20-8 | 12.5        | 19             | 204 | 105 | 30 | 3.0        |

\*Safety factor 4:1

Master Link SKO (open)

EN 1677-1

| Art. no. | Code        | WLL<br>tonnes* | For<br>chain dim. | L   | E   | G  | E1 | Weight<br>kgs |
|----------|-------------|----------------|-------------------|-----|-----|----|----|---------------|
| Z418683  | SKO-7/8-8   | 2              | 7, 8              | 99  | 50  | 14 | 15 | 0.3           |
| Z418780  | SKO-10-8    | 3.2            | 10                | 127 | 66  | 18 | 20 | 0.6           |
| Z419383  | SKO-13-8    | 5.4            | 13                | 145 | 72  | 22 | 25 | 1             |
| Z419480  | SKO-16-8    | 8              | 16                | 175 | 82  | 25 | 30 | 1.5           |
| Z419587  | SKO-18/20-8 | 12.5           | 19                | 204 | 105 | 30 | 36 | 2.9           |

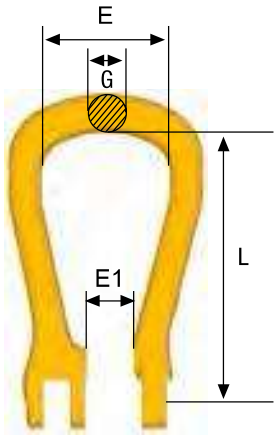


Roundsling Coupling SKR

EN 1677-1

Special shape for full WLL of the roundsling


| Art. no. | Code        | WLL<br>tonnes* | L   | B   | K  | Weight<br>kgs |
|----------|-------------|----------------|-----|-----|----|---------------|
| Z127840  | SKR-7/8-8   | 2              | 35  | 40  | 18 | 0.2           |
| Z143143  | SKR-10-8    | 3.2            | 42  | 47  | 24 | 0.4           |
| Z302538  | SKR-13-8    | 5.4            | 50  | 53  | 29 | 0.7           |
| Z143240  | SKR-16-8    | 8              | 62  | 67  | 35 | 1.3           |
| Z143347  | SKR-18/20-8 | 12.5           | 71  | 80  | 43 | 1.9           |
| Z100057  | SKR-22-8    | 15.5           | 111 | 125 | 50 | 5.3           |
| Z100055  | SKR-26-8    | 21.6           | 129 | 150 | 58 | 8.9           |



Half-link SKT (incl. locking set)

EN 1677-1


| Art. no. | Code        | WLL<br>tonnes* | For<br>chain dim. | L   | B  | F  | A  | E  | Weight<br>kgs |
|----------|-------------|----------------|-------------------|-----|----|----|----|----|---------------|
| Z426286  | SKT-7/8-8   | 2              | 7, 8              | 28  | 18 | 9  | 11 | 22 | 0.1           |
| Z426383  | SKT-10-8    | 3.2            | 10                | 34  | 25 | 11 | 13 | 26 | 0.2           |
| Z426480  | SKT-13-8    | 5.4            | 13                | 44  | 30 | 15 | 16 | 33 | 0.4           |
| Z426587  | SKT-16-8    | 8              | 16                | 52  | 36 | 19 | 20 | 40 | 0.6           |
| Z426684  | SKT-18/20-8 | 12.5           | 19                | 63  | 43 | 22 | 23 | 48 | 1.1           |
| Z100225  | SKT-22-8    | 15.5           | 22                | 76  | 50 | 24 | 26 | 60 | 1.7           |
| Z100226  | SKT-26-8    | 21.6           | 26                | 80  | 58 | 30 | 33 | 61 | 2.6           |
| Z100227  | SKT-32-8    | 32.8           | 32                | 100 | 70 | 38 | 40 | 78 | 4.9           |




Sling Hook ESKN/SKN with latch

EN 1677-2

| Art. no. | Code         | WLL<br>tonnes* | For<br>chain dim. | L   | B  | G  | H  | Weight<br>kgs |
|----------|--------------|----------------|-------------------|-----|----|----|----|---------------|
| Z424682  | SKN-7/8-8    | 2.0            | 7, 8              | 90  | 27 | 18 | 21 | 0.4           |
| Z424789  | SKN-10-8     | 3.2            | 10                | 115 | 34 | 23 | 29 | 0.8           |
| Z101214  | ESKN-13-8    | 5.4            | 13                | 145 | 42 | 28 | 36 | 1.8           |
| Z100786  | ESKN-16-8    | 8.0            | 16                | 178 | 54 | 38 | 43 | 3.4           |
| Z100781  | ESKN-18/20-8 | 12.5           | 19                | 197 | 59 | 49 | 51 | 5.1           |

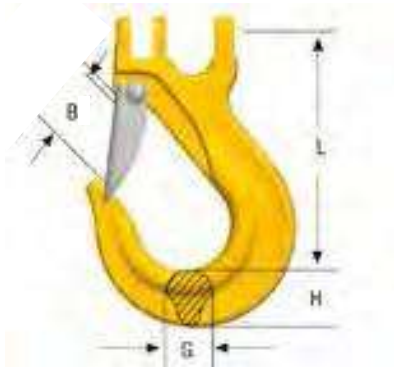

\*Safety factor 4:1

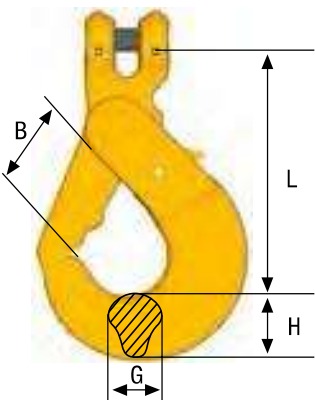


## Container Hook BKGK

EN 1677-3

| Art. no. | Code      | WLL tonnes* | For chain dim. | L   | B  | G  | H  | Weight kgs |
|----------|-----------|-------------|----------------|-----|----|----|----|------------|
| Z100240  | BKGC-13-8 | 5.4         | 13             | 164 | 55 | 27 | 43 | 3.2        |
| Z100242  | BKGC-16-8 | 8           | 16             | 160 | 55 | 27 | 43 | 3.4        |


(Spare part: RDOBK-16 to both sizes)



## Master Link D

| Art. no. | Code   | WLL tonnes* | E  | D  | L  | R  | Weight kgs |
|----------|--------|-------------|----|----|----|----|------------|
| Z700877  | D-14-8 | 2.5         | 55 | 14 | 65 | 24 | 0.4        |
| Z700878  | D-17-8 | 4           | 64 | 17 | 62 | 29 | 0.5        |
| Z700880  | D-22-8 | 8           | 76 | 22 | 90 | 33 | 1          |


The loadbearing width must be at least 0.5 x E

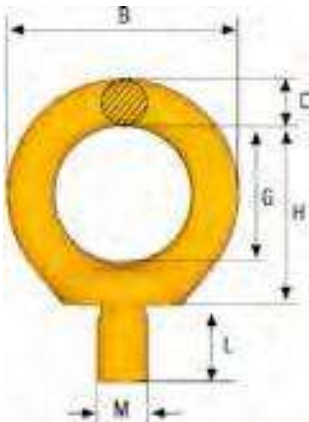

## Eye Lifting Point ELP


| Art. no. | Code     | WLL tonnes* | B   | D  | G  | H  | L  | M   | Weight kgs |
|----------|----------|-------------|-----|----|----|----|----|-----|------------|
| Z100434  | ELP-16-8 | 1**         | 72  | 16 | 42 | 55 | 24 | M16 | 0.4        |
| Z100435  | ELP-20-8 | 1**         | 72  | 16 | 42 | 58 | 30 | M20 | 0.4        |
| Z100436  | ELP-24-8 | 2**         | 88  | 19 | 48 | 69 | 36 | M24 | 0.9        |
| Z100437  | ELP-30-8 | 3**         | 106 | 22 | 60 | 84 | 45 | M30 | 1.4        |

\*\* In case of 1-leg application where loading is limited to straight loading in the direction of thread (no bending force) it is possible to use ELP with four times higher WLL. Note! Threaded depths need to be at least 1xM for steel, 1,25xM for cast iron and 2xM for aluminium alloy.

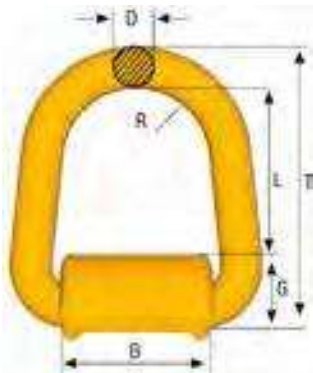

## Weldable Lifting Point WLP

| Art. no. | Code   | WLL tonnes* | B  | D  | G  | L  | R  | T   | Weight kgs |
|----------|--------|-------------|----|----|----|----|----|-----|------------|
| Z700900  | WLP-1T | 1           | 50 | 14 | 27 | 53 | 24 | 95  | 0.5        |
| Z700901  | WLP-3T | 3           | 58 | 17 | 34 | 48 | 29 | 97  | 0.8        |
| Z700902  | WLP-5T | 5           | 64 | 22 | 41 | 73 | 33 | 135 | 1.8        |

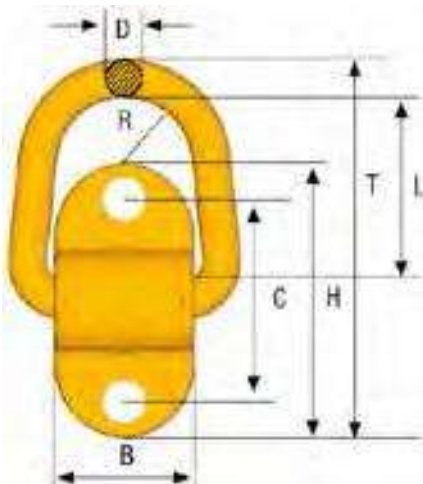

## Screw-on Lifting Point SLP

| Art. no. | Code      | WLL tonnes* | B  | C   | D  | H   | L  | M   | T   | R  | Weight kgs |
|----------|-----------|-------------|----|-----|----|-----|----|-----|-----|----|------------|
| Z700903  | SLP-1T    | 1           | 50 | 72  | 14 | 98  | 55 | M14 | 139 | 24 | 0.8        |
| Z700904  | SLP-3T    | 3           | 58 | 84  | 17 | 114 | 50 | M16 | 144 | 29 | 1.3        |
| Z700986  | SLP-5T*** | 5           | 64 | 116 | 22 | 160 | 74 | M20 | 203 | 33 | 2.6        |

\*\*\* Can be supplied with spring for stay up function

## Working Load Limits for ELP / WLP / SLP on page 2:44