

Weatherly #148
27.12 (Industrial)
August 2022

Supersedes 27.12 (Industrial) | April, 2019



PEERLESS®

A KITO GROUP COMPANY

2023

OVERHEAD LIFTING



CARGO CONTROL



HARDWARE




MARINE



Visit Us Online: www.peerlesschain.com | 800.873.1916



Oblong Master Links

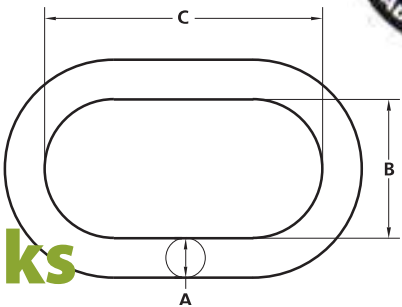

Peerless® Oblong Master Links

- Proudly Made in the USA
- Welded & Forged Alloy Steel with either a self-colored or powder coated finish
- Peerless exceeds ASTM A906 & A952 requirements
- All oblong master links are proof tested
- Forged master links meet or exceed the design factor requirements for both chain (4:1) and wire rope (5:1) as defined in ASME B30.9
- Forged master links have enlarged inside dimensions to accommodate wire rope thimbles
- Each FORGED* link marked with the following:
 - USA
 - Peerless “P” logo
 - Traceability & heat code
 - A10 Designating Grade 100
 - Manufacturer’s mark
 - Angle indicators at 45° from vertical

Stock #		Trade Size		Forged or Welded	Dimensions (Inches)			Lbs. Per Each	Working Load Limit (Lbs.)	Proof Load (Lbs.)
Self Colored	Painted	Inches	MM		A	B	C			
OMA041	---	13/32	10	Welded	0.41	1.50	3.00	0.3	3,600	7,200
8810005	8810003	1/2	13	Forged*	0.58	2.54	5.01	1.1	7,400**	17,200
8810015	8810014	3/4	19	Forged*	0.76	3.04	6.01	2.9	15,200**	35,200
8810025	8810024	1	26	Forged*	1.01	4.04	8.01	5.6	26,000**	60,000
8810030	8810029	1-1/4	32	Forged*	1.34	5.50	9.50	11.6	39,100**	90,400
8810035	8810034	1-1/2	38	Forged*	1.60	5.90	10.50	18.2	61,100**	141,200
8810040	8810039	1-3/4	44	Forged*	1.75	6.00	12.00	24.9	84,900**	196,000
OMA200	OMA200P	2	50	Welded	2.00	7.00	14.00	37.0	88,900	177,800
OMA225	OMA225P	2-1/4	57	Welded	2.25	8.00	16.00	63.0	125,200	250,400
OMA250	---	2-1/2	63	Welded	2.50	8.00	16.00	67.7	147,300	294,600
OMA275	---	2-3/4	70	Welded	2.75	9.00	16.00	83.7	187,800	375,600

***Ultimate load meets ASTM A952 specifications, based on a single leg sling at 90° or a double leg sling at 60° from horizontal.*

For use with G80 & G100 Alloy Chain Slings

Stock #		Trade Size		Forged or Welded	Dimensions (Inches)			Chain Dia		Single Leg Working Load Limit (lbs)		Double Leg Working Load Limit @ 60° (lbs)		Lbs. Per Each
Self Colored	Painted	Inches	MM		A	B	C	Inch	MM	G80	G100	G80	G100	
8810005	8810003	1/2	13	Forged*	0.58	2.54	5.01	7/32	5.5	2,100	3,100	3,600	4,700	1.1
								9/32	7	3,500	4,300	6,100	7,400	
								5/16	8	4,500	5,700	---	---	
8810015	8810014	3/4	19	Forged*	0.76	3.04	6.01	5/16	8	4,500	5,700	7,800	9,900	2.9
								3/8	10	7,100	8,800	12,300	15,200	
								1/2	13	12,000	15,000	---	---	
8810025	8810024	1	26	Forged*	1.01	4.04	8.01	1/2	13	12,000	15,000	20,800	26,000	5.6
								5/8	16	18,100	22,600	---	---	
								5/8	16	18,100	22,600	31,300	39,100	
8810030	8810029	1-1/4	32	Forged*	1.34	5.50	9.50	3/4	20	28,300	35,300	-	-	11.6
								3/4	20	28,300	35,300	49,000	61,100	
8810035	8810034	1-1/2	38	Forged*	1.60	5.90	10.50	7/8	23	34,200	42,700	---	---	18.2
								7/8	23	34,200	42,700	59,200	74,000	
8810040	8810039	1-3/4	44	Forged*	1.75	6.00	12.00	1	26	47,700	59,700	---	---	24.9
								1	26	47,700	---	82,600	---	
OMA200	---	2	51	Welded	2.00	7.00	14.00	1-1/4	32	72,300	---	---	---	46.5
OMA225	---	2-1/4	57	Welded	2.25	8.00	16.00	1-1/4	32	72,300	---	125,200	---	63.0






OBLONG MASTER LINKS


V10™ Alloy Oblong Master Links (Grade 100)

Stock #	Mfr. #	Trade Size		Matching G100 Chain Size (Inches)		Dimensions (Inches)			Lbs. Per Each	Working Load Limit (Lbs.)*
		Inches	MM	1 leg	2 Legs	A	B	C		
8451000	D13	1/2	13	9/32	1/4	0.51	2.36	4.33	0.8	5,300
8451100	D16	5/8	16	5/16	9/32	0.63	2.36	4.33	1.2	7,400
8451200	D18	3/4	18	3/8	5/16	0.75	2.95	5.31	2.0	11,200
8451300	D22	7/8	22	1/2	3/8	0.91	3.54	6.30	3.5	15,200
8451400	D26	1	26	5/8	1/2	1.06	3.94	7.09	5.5	26,400
8451500	D32	1-1/4	32	3/4	5/8	1.30	4.33	7.87	9.3	39,700
8451600	D38	1-1/2	38	7/8	3/4	1.50	5.91	10.83	16.5	61,100
8451700	D45	1-3/4	45	1	7/8	1.77	7.09	13.39	28.3	79,300
8451800	D50	2	50	---	1	1.97	7.48	13.78	36.4	103,600
8451900	D60	2-3/8	60	---	---	2.20	7.87	15.75	51.4	132,200

**Working Load Limit (WLL) of the oblong master link only, for WLL of chain slings please refer to page 7.*

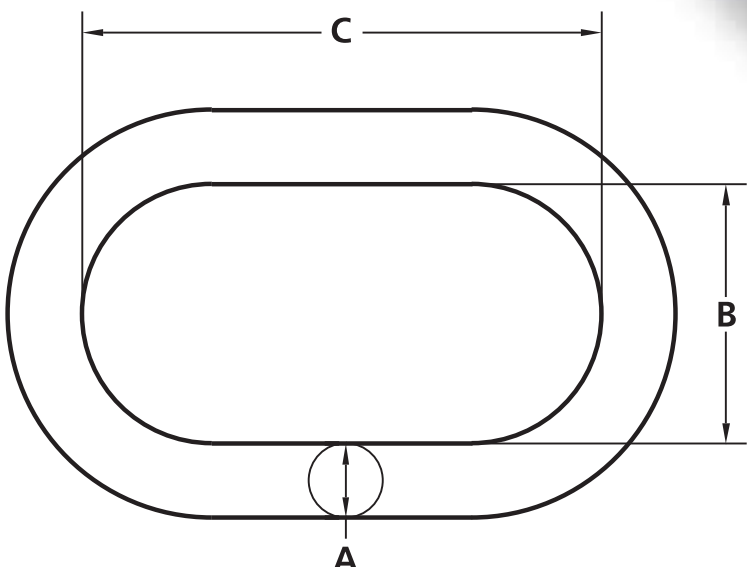

DO NOT EXCEED CAPACITY!
See the CAUTIONS & WARNINGS section before using these products. Pages 134-145.

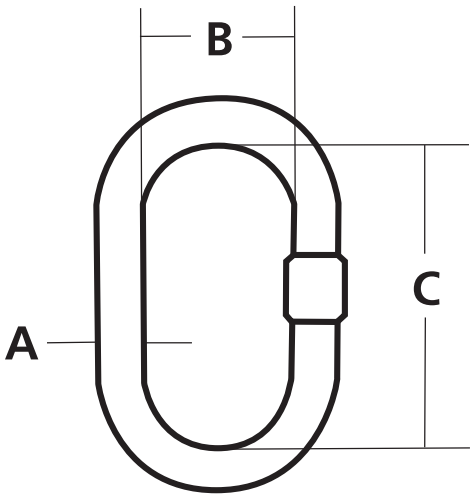

Oblong Master Links cont.

Accoloy® Kuplex®

Stock #		Trade Size		Forged or Welded	Dimensions (Inches)			Lbs. Per Each	Working Load Limit (Lbs.)	Proof Load (Lbs.)
Self Colored	Painted	Inches	MM		A	B	C			
598300047	598350001	5/8	16	Forged	0.63	3.00	6.00	1.4	7,400	17,200
598300048	598350002	3/4	19	Forged	0.75	3.00	6.00	2.5	15,200	35,200
598300049	598350003	1	26	Forged	1.00	3.50	7.00	5.3	26,000	60,000
598300052	598350004	1-1/4	32	Forged	1.25	4.00	8.00	8.6	39,100	90,400
598300022	598350005	1-1/2	38	Welded	1.50	6.00	12.00	18.0	58,700	135,600
598300025	598310006	1-3/4	44	Welded	1.75	6.00	12.00	25.0	73,500	169,800
598300030	---	2	51	Welded	2.00	7.00	14.00	38.0	88,900	205,800
598300034	---	2-1/4	57	Welded	2.25	8.00	16.00	58.0	125,200	289,200
598300038	---	2-1/2	63	Welded	2.50	8.00	16.00	74.0	135,000	270,000
598300036	---	2-3/4	70	Welded	2.75	9.00	16.00	92.0	164,400	375,600

For use with G80 & G100 Alloy Chain Slings

Stock #		Trade Size		Forged or Welded	Dimensions (Inches)			Chain Dia		Single Leg Working Load Limit (lbs)		Double Leg Working Load Limit @ 60° (lbs)		Lbs. Per Each
Self Colored	Painted	Inches	MM		A	B	C					G80	G100	
									Inch	MM	G80	G100	G80	
598300047	598350001	5/8	16	Forged	0.63	3.00	6.00	7/32	5.5	2,100	3,100	3,600	4,700	1.4
								9/32	7	3,500	4,300	6,100	7,400	
								5/16	8	4,500	5,700	-	-	
598300048	598350002	3/4	19	Forged	0.75	3.00	6.00	5/16	8	4,500	5,700	7,800	9,900	2.5
								3/8	10	7,100	8,800	12,300	15,200	
598300049	598350003	1	26	Forged	1.00	3.50	7.00	1/2	13	12,000	15,000	20,800	26,000	5.3
								5/8	16	18,100	22,600	-	-	
598300052	598350004	1-1/4	32	Forged	1.25	4.00	8.00	5/8	16	18,100	22,600	31,300	39,100	8.6
								3/4	20	28,300	35,300	-	-	
598300022	598350005	1-1/2	38	Welded	1.50	6.00	12.00	3/4	20	28,300	35,300	49,000	-	18.0
								7/8	23	34,200	42,700	-	-	
598300025	598310006	1-3/4	44	Welded	1.75	6.00	12.00	7/8	23	34,200	-	59,200	-	25.0
								1	26	47,700	-	-	-	
598300030	-	2	51	Welded	2.00	7.00	14.00	1	26	47,700	-	82,600	-	38.0
								1-1/4	32	72,300	-	-	-	
598300034	-	2-1/4	57	Welded	2.25	8.00	16.00	1-1/4	32	72,300	-	125,200	-	58.0





OTHER ALLOY COMPONENTS




Peerless® Alloy Pear Shape Master Links

Alloy components are 8620 alloy steel. Master links are welded, heat-treated, proof tested and tumble finished.

Stock #	Trade Size		Dimensions (Inches)				Lbs. Per Each	Working Load Limit (Lbs.)
	Inches	MM	D	E	F	G		
Self-Colored								
PMA050	1/2	13	0.500	1.500	3.000	6.000	1.00	4,100
PMA063	5/8	16	0.630	1.500	3.000	6.000	1.46	6,600
PMA075	3/4	20	0.750	1.750	3.000	6.000	2.20	13,200
PMA100	1	26	1.000	2.500	4.000	8.000	5.10	22,500
PMA125	1-1/4	32	1.250	3.000	6.000	9.000	9.50	32,500
PMA150	1-1/2	38	1.500	5.500	7.000	10.500	16.36	49,000
PMA175	1-3/4	45	1.750	4.000	7.000	12.000	24.40	73,500
PMA200	2	50	2.000	4.000	7.000	14.000	42.25	88,900

**NAS specification Pear Shape Master Links available upon request.*

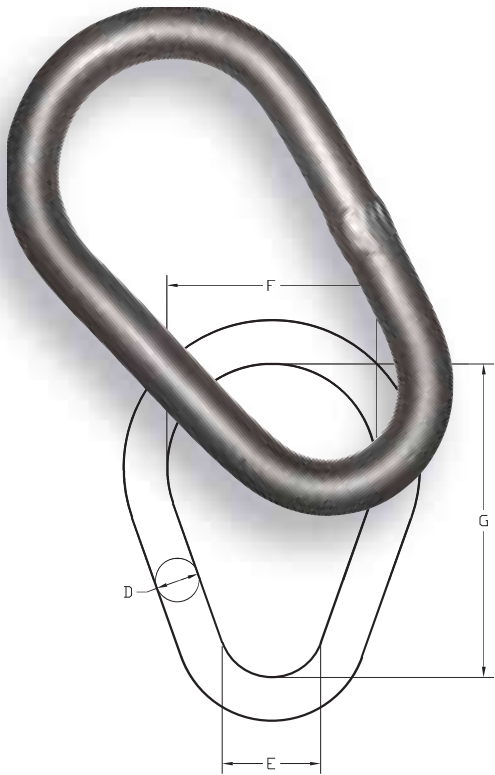


Peerless® Alloy Round Rings



Alloy components are 8620 alloy steel. Master links are welded, heat-treated, proof tested and tumble finished.

Stock #	Trade Size		Dimensions (Inches)		Lbs. Per Each	Working Load Limit (Lbs.)
	Inches	MM	A	B		
Self-Colored						
RMA050	1/2	13	0.500	2.500	0.58	4,300
RMA063	5/8	16	0.630	3.000	1.00	5,650
RMA075	3/4	20	0.750	4.000	2.00	8,600
RMA088	7/8	22	0.880	4.000	2.83	13,200
RMA100	1	26	1.000	4.000	3.40	19,000
RMA125	1-1/4	32	1.250	5.000	7.50	24,000
RMA150	1-1/2	38	1.500	6.000	12.00	37,000
RMA175	1-3/4	45	1.750	7.000	20.00	49,000
RMA200	2	50	2.000	8.000	27.20	60,000

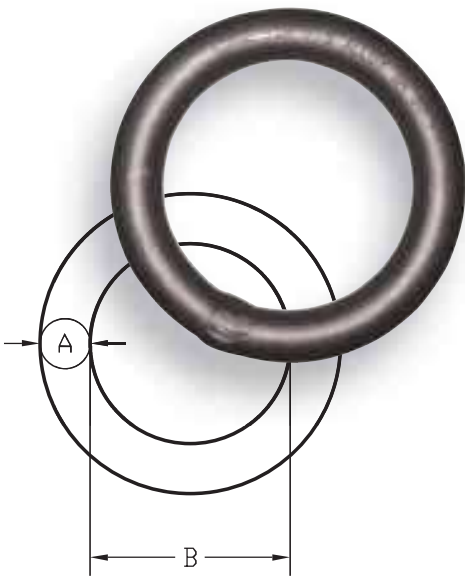


V-Notched Alloy Coupling Links



Alloy components are 8620 alloy steel. Un-heat treated coupling links are pre-notched, bright finished and ready for welding.

NOT FOR OVERHEAD LIFTING

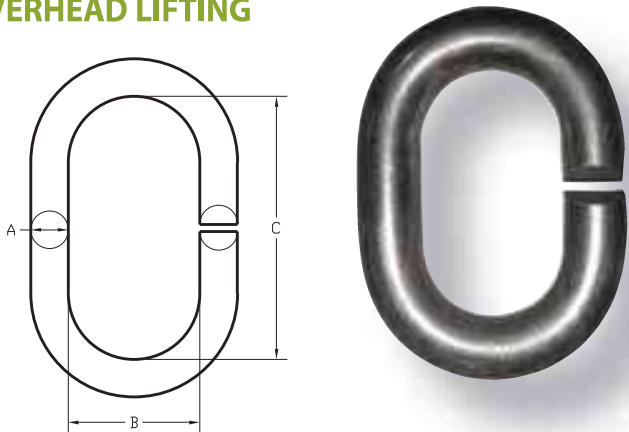

Stock #	Chain Size		Dimensions (Inches)			Lbs. Per Each
	Inches	MM	A	B	C	
Self-Colored						
CAN038	9/32	7	0.380	0.880	1.500	0.20
CAN050	3/8	10	0.500	1.250	2.000	0.40
CAN069	1/2	13	0.690	1.500	2.500	0.90
CAN081	5/8	16	0.810	1.750	3.000	1.50
CAN094	3/4	20	0.940	2.000	3.500	2.30
CAN106	7/8	22	1.060	2.250	4.000	3.30
CAN125	1	26	1.250	3.000	5.250	6.00
CAN150	1-1/4	32	1.500	3.500	6.250	10.30
CAN175	1-1/2	38	1.750	4.000	7.000	15.90
CAN200	1-3/4	45	2.000	4.500	8.000	23.60
CAN225	2	50	2.250	5.000	9.000	33.50



DO NOT EXCEED CAPACITY!
See the CAUTIONS & WARNINGS section before using these products. Pages 134-145.






Sub-Assemblies

Peerless® Alloy

Grade 80 Alloy components are 8620 alloy steel. Master links are welded, heat-treated, proof tested and tumble finished.

Stock #	Trade Size	Dimensions (Inches)						Lbs. Per Ea.	Grade 80 Chain Size		WLL 3-4 Leg Chain Sling @ 60° (Lbs.)
		A	B	C	A1	B1	C1		In.	MM	
Self-Colored	In.										
SMA028	3/4	0.750	2.750	5.500	0.500	1.250	2.000	2.90	9/32	7	9,100
SMA038	1	1.000	3.500	7.000	0.750	1.500	3.000	7.30	3/8	10	18,400
SMA050	1-1/4	1.250	4.380	8.750	1.000	2.000	4.000	16.33	1/2	13	31,200
SMA063	1-1/2	1.500	5.250	10.500	1.250	3.000	5.250	27.80	5/8	16	47,000
SMA075	1 3/4	1.750	6.000	12.000	1.500	3.250	5.750	51.00	3/4	20	73,500
SMA088	2	2.000	7.000	14.000	1.750	4.000	6.000	65.90	7/8	22	88,900
SMA100	2-1/4	2.250	8.000	16.000	1.880	4.000	7.000	90.55	1	26	123,900
SMA125	2-3/4	2.750	9.000	16.000	2.250	4.500	8.000	144.90	1-1/4	32	187,800

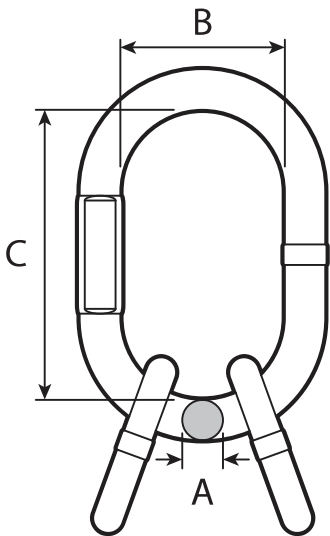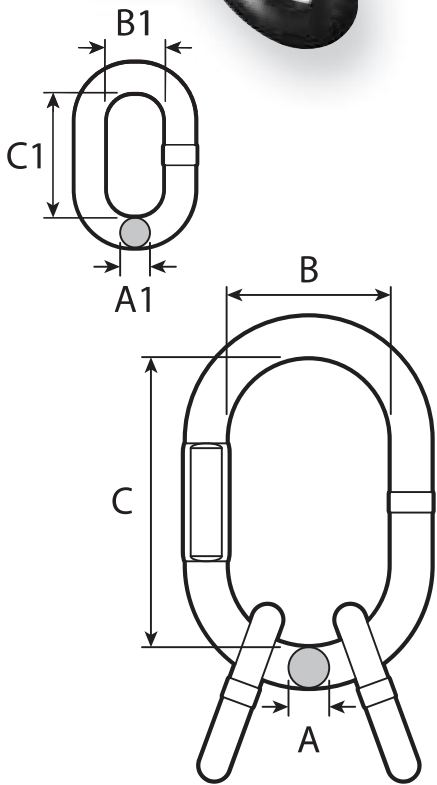

V10™ Alloy Oblong Sub-Assemblies w/Small Sub-Links (Grade 100)

Stock #	Mfr. #	Trade Size (Inches)	Matching G100 Chain Size (Inches)	Dimensions (Inches)						Lbs. Per Each	Working Load Limit (Lbs.)*
				3-4 Legs	A	B	C	A1	B1	C1	
Blue											
8452110	D18L13	3/4	9/32		0.75	2.95	5.31	0.51	1.50	2.36	3.0
8452210	D22L16	7/8	5/16		0.91	3.54	6.30	0.63	1.34	2.76	5.3
8452310	D26L20	1	3/8		1.06	3.94	7.09	0.75	1.57	3.35	8.4
8452410	D32L22	1-1/4	1/2		1.30	4.33	7.87	0.91	1.97	4.53	14.5
8452510	D38L26	1-1/2	5/8		1.50	5.91	10.83	1.06	2.56	5.51	25.3
8452610	D50L32	2	3/4		1.97	7.48	13.78	1.30	2.76	5.91	50.7
8452710	D56L36	2-1/4	7/8		2.20	9.84	13.78	1.42	2.95	6.69	68.4
8452810	D60L40	2-3/8	1		2.20	7.87	15.75	1.57	3.15	6.69	75.6


*Working Load Limit (WLL) of the oblong sub-assembly only, for WLL of chain slings please refer to pg.7.






SUB-ASSEMBLIES

V10™ Alloy Sub-Assemblies w/Large Sub-Links (Grade 100)

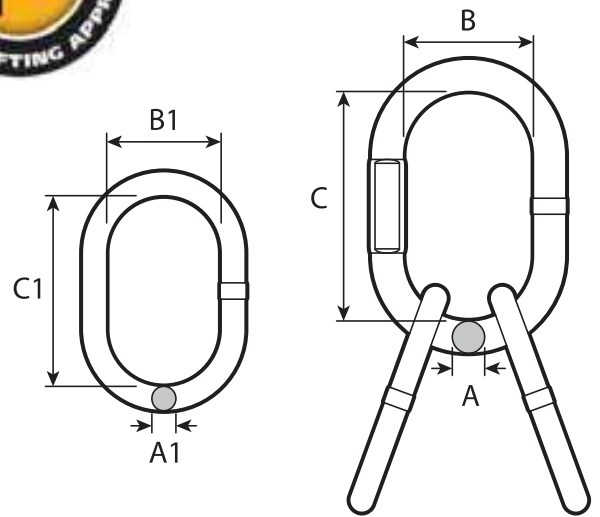

Stock #	Mfr. #	Trade Size (Inches)	Matching G100 Chain Size (Inches)	Dimensions (Inches)						Lbs. Per Each	Working Load Limit (Lbs.)*
			3-4 Legs	A	B	C	A1	B1	C1		
8452100	D18E14	3/4	9/32	0.75	2.95	5.31	0.59	2.76	4.72	4.2	11,200
8452200	D22E16	7/8	5/16	0.91	3.54	6.30	0.67	3.15	5.51	6.9	15,200
8452300	D26E20	1	3/8	1.06	3.94	7.09	0.79	3.74	6.30	10.9	22,900
8452400	D32E26	1-1/4	1/2	1.30	4.33	7.87	1.06	4.33	7.48	21.0	39,700
8452500	D38E32	1-1/2	5/8	1.50	5.91	10.83	1.30	5.12	9.06	37.5	61,100
8452600	E50D38	2	3/4	1.97	9.84	13.78	1.50	5.91	10.83	71.9	91,700
8452700	D56D45	2-1/4	7/8	2.20	9.84	13.78	1.77	7.09	13.39	106.1	110,900
8452800	D60D50	2-3/8	1	2.20	7.87	15.75	1.97	7.48	13.78	124.4	154,800

**Working Load Limit (WLL) of the oblong sub-assembly only, for WLL of chain slings please refer to pg.7.*

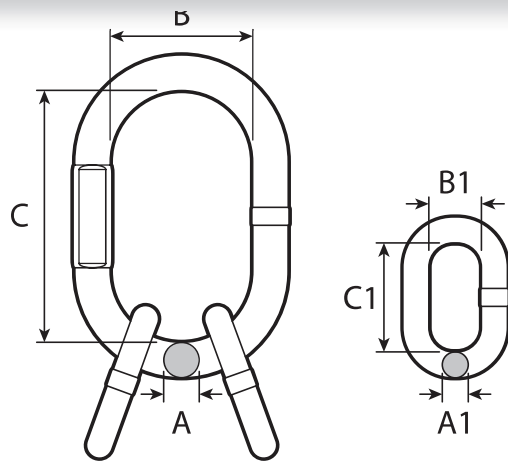

Accoloy® Kuplex®

These Oblong Sub-Assemblies are fabricated from premium fine grain alloy steel subjected to high quality heat treatment and quality control associated with other Peerless products.



Stock #	Trade Size (Inches)	Dimensions (Inches)						Lbs. Per Each	Chain Size			WLL 3-4 Leg Chain Sling @ 60°
		A	B	C	A1	B1	C1		Inches	MM	Grade	
599450401	3/4	0.750	3.000	6.000	0.625	1.156	2.188	3.8	9/32	7	100	11,200
599450601	1	1.000	3.500	7.000	0.750	1.500	3.000	7.2	3/8	10	100	22,900
599450801	1-1/4	1.250	4.000	8.000	1.031	2.000	4.000	15.0	1/2	13	100	39,000
599451001	1-1/2	1.500	6.000	12.000	1.125	2.250	4.563	26.2	5/8	16	100	58,700
599401201	1-3/4	1.750	6.000	12.000	1.500	2.500	5.250	42.3	3/4	20	80	73,500
599401401	2	2.000	7.000	14.000	1.750	3.000	6.000	65.5	7/8	22	80	88,900
599401601	2-1/4	2.250	8.000	16.000	1.875	5.000	10.000	115.0	1	26	80	123,900
599402001	2-3/4	2.750	9.000	16.000	2.250	5.000	10.000	160.0	1-1/4	32	80	187,800




DO NOT EXCEED CAPACITY!
See the CAUTIONS & WARNINGS section before using these products. Pages 134-145.



Master Link Assemblies
w/Shortening Hook

These assemblies combine the benefits of the V10 shortening grab hook with clevis attachment and either a masterlink or sub-assembly. All of this is done without the need for additional coupling links. The chain can be connected directly to the shortening hook creating a chain sling leg with a built in chain shortener!

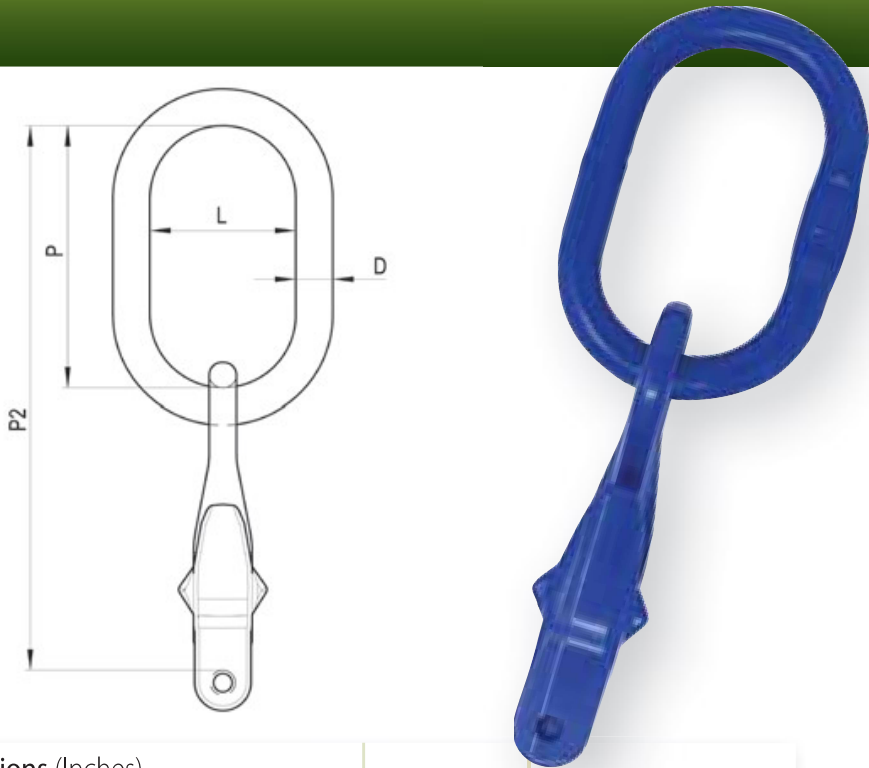


(Single Leg)

Stock #	Mfr. #	Chain Size (Single Leg)		Dimensions (Inches)				Lbs. Per Each	Working Load Limit (Lbs.)
		Inches	MM	D	P	P2	L		
8451050	D13GI1	1/4	6	0.51	4.33	7.56	2.36	1.35	3,100
8451150	D16GI1	9/32 - 5/16	7 - 8	0.63	4.33	8.94	2.36	2.51	5,700
8451250	D18GI1	3/8	10	0.75	5.31	11.14	2.95	4.67	8,800
8451350	D22GI1	1/2	13	0.91	6.30	13.58	3.54	9.19	15,000
8451450	D26GI1	5/8	16	1.06	7.09	16.22	3.94	15.39	22,600


Master Link Assemblies
w/Shortening Hook

(Double Leg)

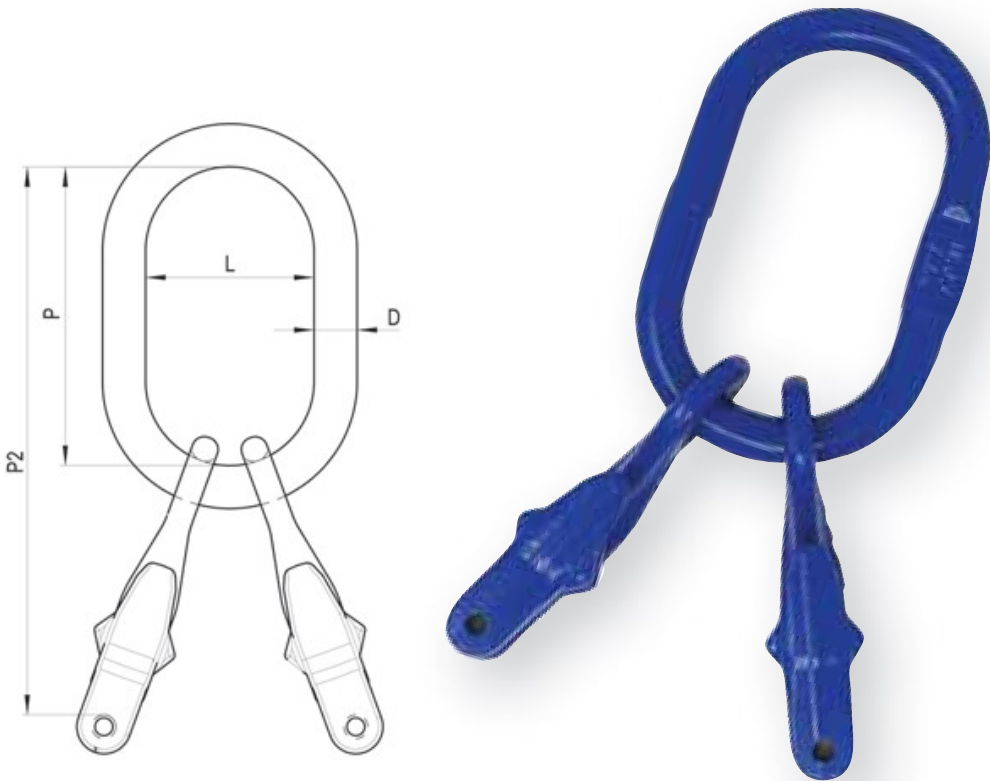

Stock #	Mfr. #	Chain Size (Double Leg)		Dimensions (Inches)				Lbs. Per Each	Working Load Limit (Lbs.)
		Inches	MM	D	P	P2	L		
8451060	D13GI2	1/4	6	0.51	4.33	7.80	2.36	1.94	5,300
8451160	D18GI2	9/32 - 5/16	7 - 8	0.75	5.31	9.92	2.95	4.74	9,900
8451260	D22GI2	3/8	10	0.91	6.30	12.13	3.54	8.82	15,200
8451360	D26GI2	1/2	13	1.06	7.09	14.37	3.94	16.85	26,000
8451460	D32GI2	5/8	16	1.30	7.87	17.01	4.33	30.87	39,100



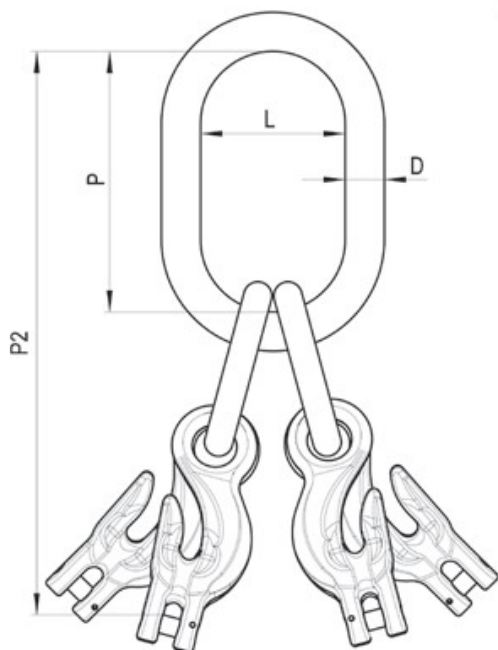

(Triple & Quad Leg)

Stock #	Mfr. #	Chain Size (Triple & Quad Leg)		Dimensions (Inches)				Lbs. Per Each	Working Load Limit (Lbs.)
		Inches	MM	D	P	P2	L		
8451070	D18L13GI	1/4	6	0.75	5.31	11.14	2.95	5.42	8,000
8451170	D22L16GI	9/32 - 5/16	7 - 8	0.91	6.30	13.66	3.54	10.58	14,800
8451270	D26L20GI	3/8	10	1.06	7.09	16.26	3.94	18.96	22,900
8451370	D32L22GI	1/2	13	1.30	7.87	19.69	4.33	37.04	39,000
8451470	D38L26GI	5/8	16	1.50	10.83	25.47	5.91	68.36	58,700



Lift With Confidence!
OVERHEAD LIFTING

PEERLESS
A KITO GROUP COMPANY
www.peerlesschain.com




DO NOT EXCEED CAPACITY!
See the CAUTIONS & WARNINGS section before using these products. Pages 134-145.

OVERHEAD LIFTING

OTHER ALLOY COMPONENTS

Kuplex® Master Kuplinks


Master Kuplinks® are the optimum of chain to master link connections. In addition to the streamline characteristics of the Kuplink®, there is a definite advantage to field assembly since other coupling devices are unnecessary.

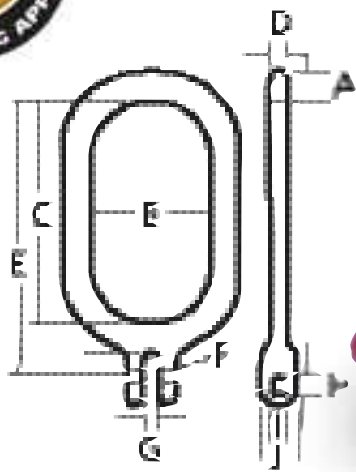

Stock #		Chain Size			Dimensions (Inches)										Lbs. Per Each	WLL (Lbs.)
		In.	MM	Grade	A	B	C	D	E	F	G	H	I	J		
598350011	K-11	9/32	7	100	0.750	3.000	6.000	0.500	7.125	0.125	0.313	0.406	0.344	0.625	1.9	4,300
598350012	K-12	3/8	10	100	0.750	3.000	6.000	0.500	7.250	0.156	0.438	0.563	0.469	0.875	2.7	8,800
598350013	K-13	1/2	13	100	0.938	3.000	6.000	0.688	7.563	0.188	0.563	0.750	0.656	1.125	4.4	15,000
598350014	K-14	5/8	16	100	1.125	4.000	8.000	0.875	9.938	0.250	0.688	0.938	0.813	1.500	8.2	22,600
598300015	K-15	3/4	20	80	1.250	4.000	8.000	0.875	10.188	0.313	0.813	1.219	1.000	1.750	11.6	28,300

Kuplex® Kuplers

Kuplers act as a connection device between Master Links and Chain on all multiple leg Kuplex II Chain Slings. On single leg assemblies, they can be used in lieu of the popular Kuplex II Kuplink. Resembling a shackle in appearance, the Kuplers provide a high strength, high integrity connection, when used to connect a special attachment to the alloy chain assembly.

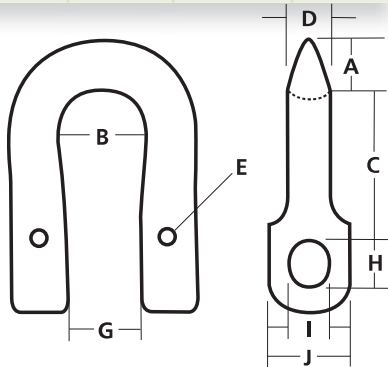


Stock #		Chain Size			Dimensions (Inches)									Lbs. Per Each	WLL (Lbs.)
		Inches	MM	Grade	A	B	C	D	E	G	H	I	J		
598150020	K-20	9/32	7	80	0.438	0.813	1.313	0.313	0.125	0.719	0.406	0.344	0.625	0.3	3,500
598150021	K-21	3/8	10	80	0.594	1.063	1.813	0.438	0.156	0.875	0.563	0.469	0.875	0.7	7,100
598150022	K-22	1/2	13	80	0.750	1.313	2.563	0.563	0.188	1.094	0.750	0.656	1.125	1.3	12,000
598150023	K-23	5/8	16	80	0.938	1.625	3.000	0.688	0.250	1.344	0.938	0.813	1.500	2.4	18,100
598100024	K-24	3/4	20	80	1.000	1.938	3.406	0.813	0.313	1.594	1.219	1.000	1.750	4.4	28,300
598100025	K-25	7/8	22	80	1.125	2.250	3.875	0.938	0.375	1.844	1.281	1.063	2.000	6.3	34,200
599100026	K-26*	1	26	63	1.250	2.688	4.250	1.063	---	2.000	1.219	1.094	2.375	6.5	35,900
599100028	K-28*	1-1/4	32	63	1.500	3.500	5.125	1.313	---	2.281	1.500	1.344	2.875	11.4	56,100

* Kuplex I style, Grade 63.

Kuplex Kuplok®

Kuplok mechanical coupling links, an essential component of mechanically coupled slings, are used to assemble chain legs to the master link and/or attach eye type fittings.

Stock #	Chain Size			Dimensions (Inches)					Lbs. Per Each	WLL (Lbs.)
	Inches	MM	Grade	A	B	C	D	E		
594200400	9/32	7	80	0.375	0.688	0.625	1.813	0.500	0.3	3,500
594200601	3/8	10	80	0.500	1.000	0.938	2.375	0.750	0.6	7,100
594200801	1/2	13	80	0.625	1.250	1.375	3.250	1.000	1.5	12,000
594201001	5/8	16	80	0.750	1.500	1.688	4.000	1.250	2.4	18,100
594201201	3/4	20	80	0.938	1.750	2.000	4.750	1.625	3.6	28,300





316 STAINLESS STEEL COMPONENTS

316 Stainless Steel Components



V-Notch Coupling Links



V-Notch coupling links are electropolished and ready for welding.

Stock #	Chain Size		Dimensions (Inches)			Lbs. Per Each
	Inches	MM	A	B	C	
CS031	3/16	5.5	0.310	0.630	1.250	0.10
CS038	9/32	7	0.380	0.880	1.500	0.16
CS044	5/16	8	0.440	0.940	1.750	0.25
CS050	3/8	10	0.500	1.000	2.000	0.36
CS063	1/2	13	0.630	1.500	2.500	0.74

**NOT FOR
OVERHEAD
LIFTING.**

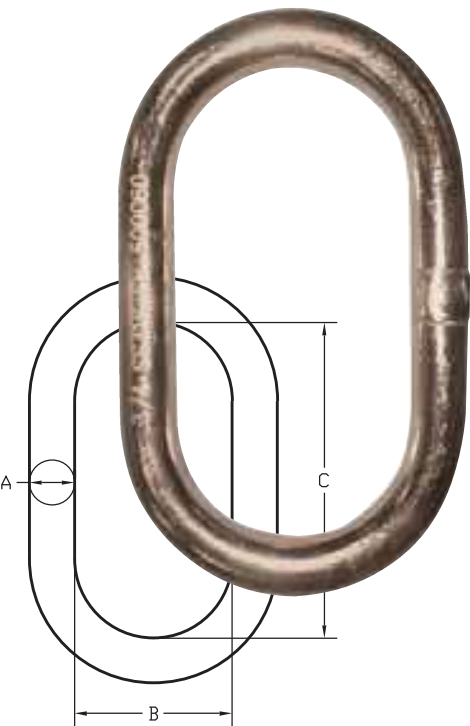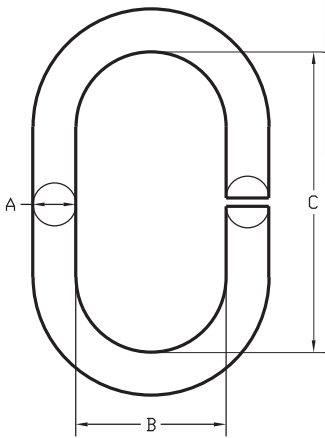

Oblong Master Links



Welded, electropolished and proof tested.


Stock #	Trade Size		Dimensions (Inches)			Lbs. Per Each	Working Load Limit (Lbs.)
	Inches	MM	A	B	C		
OMS038	3/8	10	0.380	2.000	4.000	0.42	750
OMS050	1/2	13	0.500	2.500	5.000	0.94	2,150
OMS063	5/8	16	0.630	2.750	5.500	1.63	2,850
OMS075	3/4	20	0.750	3.000	6.000	2.50	4,600
OMS100	1	26	1.000	3.500	7.000	5.40	7,800
OMS125	1-1/4	32	1.250	4.000	8.000	8.75	11,800
OMS150	1-1/2	38	1.500	5.250	10.500	17.00	18,600

Pear Shape Master Links



Welded, electropolished and proof tested.

Stock #	Trade Size		Dimensions (Inches)				Lbs. Per Each	Working Load Limit (Lbs.)
	Inches	MM	D	E	F	G		
PMS038	3/8	10	0.380	1.000	2.000	4.000	0.30	750
PMS050	1/2	13	0.500	1.250	2.500	5.000	0.80	2,150
PMS063	5/8	16	0.630	1.380	2.750	5.500	1.50	2,850
PMS075	3/4	20	0.750	1.500	3.000	6.000	2.10	4,600
PMS100	1	26	1.000	2.000	4.000	8.000	5.10	7,800
PMS125	1-1/4	32	1.250	3.000	6.000	9.000	9.60	11,800
PMS150	1-1/2	38	1.500	5.000	7.000	10.500	16.50	18,600

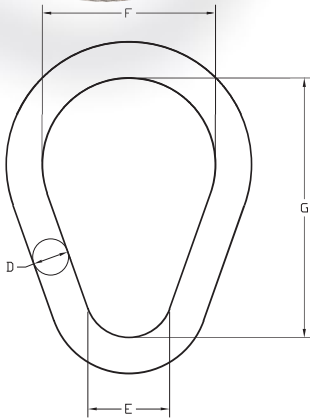

DO NOT EXCEED CAPACITY!
See the **CAUTIONS & WARNINGS** section before using these products. Pages 134-145.





316 Stainless Steel Components

Round Rings

Welded, electropolished and proof tested.

Stock #	Trade Size		Dimensions (Inches)		Lbs. Per Each	Working Load Limit (Lbs.)
	Inches	MM	A	B		
RMS038	3/8	10	0.380	2.000	0.23	750
RMS050	1/2	13	0.500	2.500	0.62	1,300
RMS063	5/8	16	0.630	3.000	1.20	1,850
RMS075	3/4	20	0.750	4.000	1.85	2,800
RMS100	1	26	1.000	4.000	4.00	5,650
RMS125	1-1/4	32	1.250	5.000	7.80	7,650
RMS150	1-1/2	38	1.500	6.000	11.70	9,700

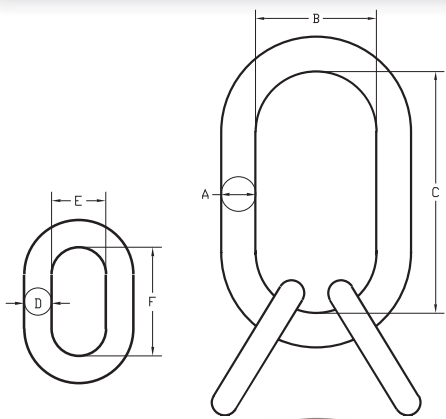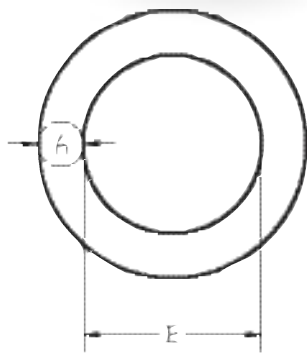

Sub-Assemblies

Welded, electropolished and proof tested.

Stock #	Chain Size		Dimensions (Inches)						Lbs. Per Each	Working Load Limit (Lbs.)
	In.	MM	A	B	C	D	E	F		@ 60°
SMS019	3/16	5.5	0.630	2.750	5.500	0.380	0.880	1.500	2.00	2,850
SMS025	1/4	6	0.750	3.000	6.000	0.500	1.000	2.000	2.90	3,225
SMS038	3/8	10	1.000	3.500	7.000	0.750	1.500	3.000	7.10	6,875
SMS050	1/2	13	1.250	4.000	8.000	0.880	2.000	3.500	12.50	11,675
SMS063	5/8	16	1.500	5.250	10.500	1.120	2.500	5.000	15.00	15,575



S-Hooks

Stock #	Trade Size	Dimensions (Inches)				Lbs. Per Each	Working Load Limit (Lbs.)
	Inches	A	B	C	D		
SHS025	1/4	0.250	2.750	0.750	0.380	0.07	75
SHS038	3/8	0.380	4.130	1.130	0.560	0.33	165
SHS050	1/2	0.500	5.500	1.500	0.750	0.59	325
SHS063	5/8	0.630	7.000	1.880	0.940	1.23	500
SHS075	3/4	0.750	8.250	2.250	1.130	2.31	660
SHS088	7/8	0.880	9.630	2.630	1.310	3.05	900
SHS100	1	1.000	11.000	3.000	1.500	4.98	1,060

