

2015



Lifting Product Catalog

Strength Through Innovation Since 1764



GUNNEBO
Industries

Chain Tensioner - GT

The chain tensioner from Gunnebo Lifting, GT, is integral in one set. It is made of light weight Grade 10 material and the ratchet handle contributes to a fast and ergonomic lashing procedure. The GT is fitted with safety pins to prevent unintended release of the threaded end fittings.

Our chain tensioner is designed to be compatible with the GrabiQ product range, enabling the choice of robust end-hooks with latches. Can also be provided as approved for lifting purposes.



Unique Benefits With our Chain Tensioner



Short Handle

- Fully protected ratched mechanism with 8 steps per 90 degree pull, enabling use in very narrow spaces.
- Easy to change direction
- The rubber handle decreases the risk of slipping and is convenient in cold climates

Open Design

- For easier and faster cleaning and lubrication
- Allows dirt to fall through instead of building up
- Two drain holes in the body prevent water residue.

Trapezoidal Thread

- Makes the thread less sensitive to dirt and particles
- Low-friction treated for trouble free operation
- Makes lashing faster
- Safety pins prevents unintended unwinding

The Gunnebo Lifting Chain Lashing System

Gunnebo Lifting offers a complete chain lashing system approved according to EN 12195-3. The system has been developed with focus on the user's needs and working environment, and with safety as highest priority. The unique Midgrab chain shortener saves valuable time and effort, and is a natural part of an efficient and effective chain lashing system.

End Fitting

Lashing hooks in grade 10, such as the EGKN Sling Hook with a heavy duty latch or the GBK Griplatch Safety Hook. Marked with positive indication of the manufacturer, product designation, size, batch number and grade.

ID-tag


The ID-tag must state the lashing Standard, capacity, tension force, traceability and name of manufacturer. It must also clearly say that the set is for lashing only, lifting is prohibited


Shortening Function

The Midgrab offers instant mounting on any part of the chain, with the ability to shorten the chain in either direction. It is designed to prevent the chain from disengaging. Marked with positive indication of the manufacturer, product designation, size, batch number and grade

Chain


Gunnebo Lifting's high tensile short link chain, grade 10 = 1000 N/mm² type KLA-10-10, LC = 8000 daN. Surface treatment: Powder coated. ID-marking of the chain: 10G

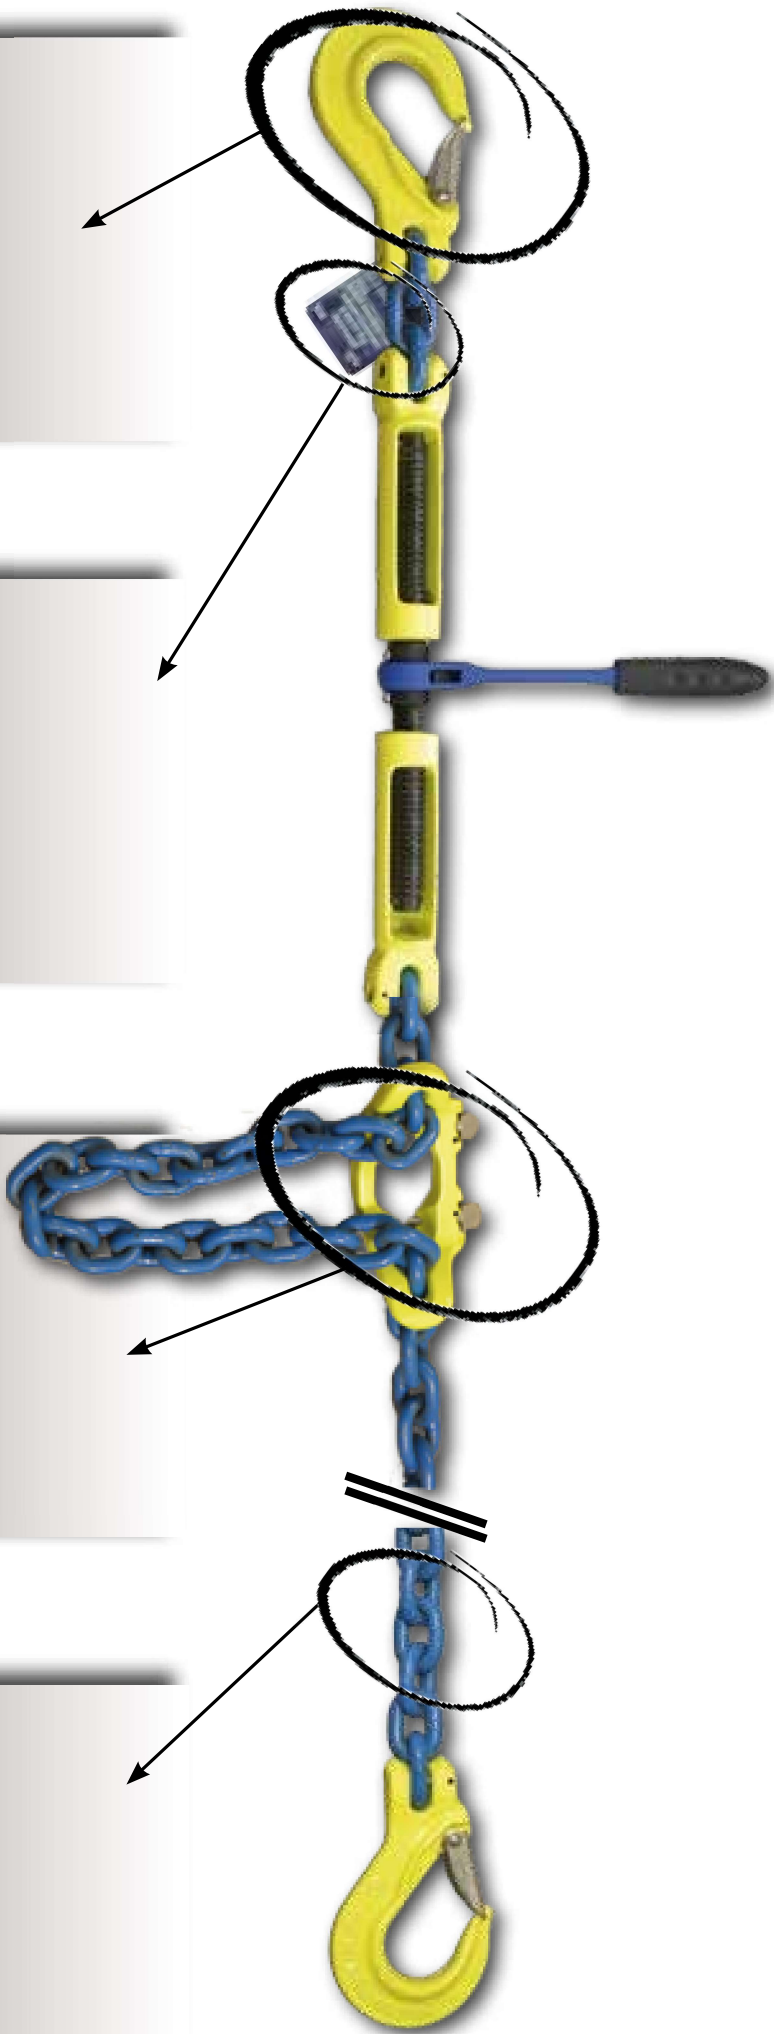

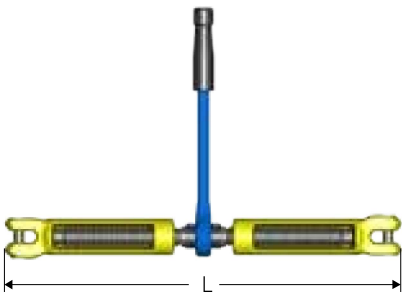


Chain Tensioner GT

Model	Lashing capacity (kN)	STF (daN)	L = Min. length (mm)	L = Max. length (mm)	Weight (kgs)
GT-8-10	50	2400	400	600	3.3
GT-10-10	80	2400	400	600	3.3

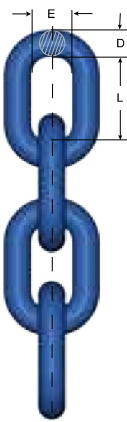


Chain GrabiQ Grade 10Short link, KL

Art. no.	Code	WLL tonnes	Lashing capacity (kN)	D nom. mm	L » mm	E » mm	Weight kgs/m	MPF kN
Z802301	KLA-8-10	2.5	50	8	24	11	1.5	63
Z801921	KLA-10-10	4	80	10	30	14	2.3	100

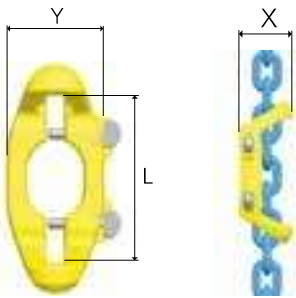


Midgrab MIG with locking pins

Art. no.	Code	WLL tonnes	Lashing capacity (kN)	L	X	Y	Weight kgs
B14303	MIG CC-8-10	2.5	50	95	50	60	0.7
B14313	MIG CC-10-10	4.0	80	125	70	77	1.1

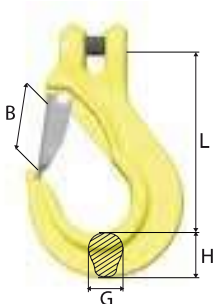

Sling Hook EGKN

Art. no.	Code	WLL tonnes	Lashing capacity (kN)	L	B	G	H	Weight kgs
B14461	EGKN-8-10	2.5	50	95	28	17	23	0.5
B14462	EGKN-10-10	4	80	121	35	23	31	1

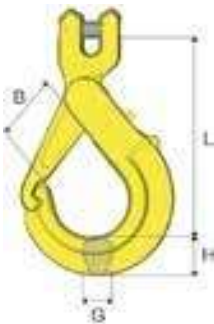

Safety Hook GBK

Art. no.	Code	WLL tonnes	Lashing capacity (kN)	L	B	G	H	Weight kgs
Z100759	GBK-8-10	2.5	50	119	36	20	22	0.8
Z100760	GBK-10-10	4	80	150	47	22	29	1.4

Lashing 4 - 10 Tonnes

European standard EN 12195-2

Art. no.	Description	Colour	Width	Breaking strength (t)	EN 12195-2 LC daN	EN 12195-2 STF daN
Complete lashing						
M275141	0.4+9.5 m with wire hook	Yellow	75	10	3000	305
Complete lashing						
M135098	0.4+7.5 m with wire hook	Blue	50	5	2000	340
M136090	0.4+9.5 m with wire hook	Blue	50	5	2000	340
Complete lashing						
M134098	0.4+ 7.5 m wire hook	Blue	50	4	1700	340
M134090	0.4+9,5 m wire hook	Blue	50	4	1700	340
M24595W	10m endless	Blue	50	5	4000	340
Ratchet with short straps						
M135051K	0.4m with wire hook	Blue	50	4 & 5	200	



Lashing 1 - 4 Tonnes

European standard EN 12195-2

Art. no.	Description	Colour	Width mm	Breaking strength (t)	EN 12195-2 LC daN	EN 12195-2 STF daN
Complete lashing						
M140090	0.5+4.5 m with wire hook	Orange	35	2.5	1000	180
M140091	0.5+5.5 m with wire hook	Orange	35	2.5	1000	180
M14P00W	5 m endless (single web.)	Orange	35	2.5	1000	
Complete lashing stainless						
M22210K	0.4+9.5 m with wire hook	Blue	50	3	1500	305
Complete lashing						
M150101	0,4+3,6 m with sewn-on eyes	Blue	26	1.5	700	150
M150102	0,4+3,6 m with wire hook	Blue	26	1.5	700	150
M150110	0,5+4,5 m with wire hook	Blue	26	1.5	700	150
M150103	5 m endless	Blue	26	1.5	700	150
Complete lashing						
M151002	0.4+3.6 m with sewn-on eyes	Orange	25	0.7	300	100
M151003	0.4+3.6 m with wire hook	Orange	25	0.7	300	100
M151005	0.4+4.5 m with wire hook	Orange	25	0.7	300	100
M151001	5 m endless	Orange	25	0.7	300	100



7

Rigging Screw with Ratchet Handle

Art. no.	Code	For chain diam. mm	Breaking strength approx. tonnes
G009860018	RS 15 T	10 mm	12.6
G009860023	RS 20 T	13 mm	21.6

