



Safety is our first priority™



Quality Management System and Product Type Approval:



Q1 0467




QMS 0726



Industrial Membership:



General Catalog No. 8-2023

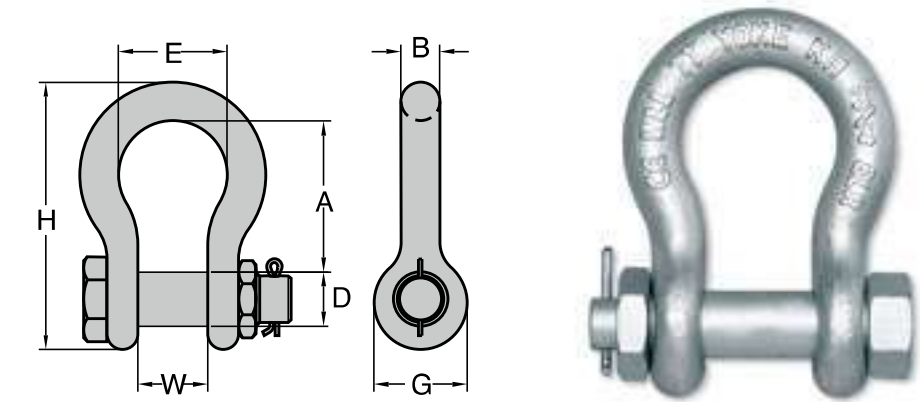

YOKE 8-808 Bolt Type Anchor Shackles meet the performance requirements of Federal Specification RR-C-271F, Type 4A , Grade B, Class 3.

- Shackles are Type Approved by DNV & ABS.
- Shackles are forged alloy steel with alloy pin.
- Size and the Working Load Limit permanently shown on each shackle.
- All shackles with Batch Code which links to Test Certificate and quality traceability.
- 100% magnaflux crack detection during manufacturing.
- 20,000 cycle fatigue rated to 1.5 times Working Load Limit.
- Galvanized finish.

Digital Chip embedded with Certificate for serial Traceability


Forged Alloy Anchor Shackle

with Bolt Pin

Item No.	Nominal Size	Working Load Limit	Dimensions (inch)							N.W.
	inch	tonnes*	A	B	D	E	G	H	W	lbs
8-808-08	5/16	1.2	1.22	0.31	0.37	0.82	0.75	2.13	0.47	0.2
8-808-10	3/8	2	1.42	0.39	0.43	1.02	0.91	2.56	0.63	0.2
8-808-11	7/16	2.7	1.70	0.43	0.51	1.18	1.06	2.95	0.75	0.4
8-808-13	1/2	3.3	1.85	0.52	0.63	1.30	1.18	3.34	0.79	0.7
8-808-16	5/8	5	2.40	0.63	0.75	1.77	1.53	4.21	1.06	1.5
8-808-19	3/4	7	2.83	0.75	0.87	1.97	1.81	5.04	1.30	2.2
8-808-22	7/8	9.5	3.39	0.87	1.02	2.28	2.09	5.91	1.50	3.7
8-808-26	1	12.5	3.78	1.02	1.10	2.68	2.36	6.57	1.73	5.3
8-808-28	1 1/8	15	4.37	1.10	1.26	2.91	2.68	7.52	1.81	7.5
8-808-32	1 1/4	18	4.76	1.26	1.42	3.22	2.99	8.07	2.12	10.6
8-808-36	1 3/8	21	5.28	1.42	1.50	3.62	3.31	9.13	2.32	14.3
8-808-38	1 1/2	30	5.57	1.50	1.77	3.90	3.62	10.00	2.36	19.1
8-808-45	1 3/4	40	7.00	1.85	2.00	5.00	4.17	12.32	2.87	38.5
8-808-50	2	55	7.76	2.09	2.24	5.75	4.80	13.66	3.27	53.2

Item No.	Nominal Size	Working Load Limit	Dimensions (mm)							N.W.
	mm	tonnes*	A	B	D	E	G	H	W	kg
8-808-08	8	1.2	31	8	9.5	21	19	54	13	0.1
8-808-10	10	2	36	10	11	26	23	65	16	0.1
8-808-11	11	2.7	43	11	13	30	27	75	19	0.2
8-808-13	13	3.3	47	13	16	33	30	85	20	0.3
8-808-16	16	5	61	16	19	43	39	107	27	0.7
8-808-19	19	7	72	19	22	50	46	126	33	1.0
8-808-22	22	9.5	86	22	26	58	53	148	38	1.7
8-808-26	26	12.5	96	26	28	68	60	166	44	2.4
8-808-28	28	15	111	28	32	74	68	190	46	3.4
8-808-32	32	18	121	32	36	82	76	210	54	4.8
8-808-36	36	21	134	36	38	92	84	232	59	6.5
8-808-38	38	30	146	38	45	99	92	254	60	8.7
8-808-45	45	40	178	47	51	127	106	313	73	17.5
8-808-50	50	55	197	53	57	146	122	347	83	24.2

★ Minimum Ultimate Load is 5 times the Working Load Limit.
Maximun Proof Load is 2 times the Working Load Limit.

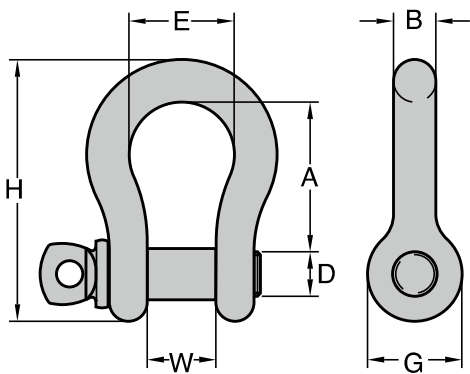

- Shackles are Type Approved by DNV & ABS.
- Shackles are forged alloy steel with alloy pin.
- Size and the Working Load Limit permanently shown on each shackle.
- All shackles with Batch Code which links to Test Certificate and quality traceability.
- 100% magnaflux crack detection during manufacturing.
- 20,000 cycle fatigue rated to 1.5 times Working Load Limit.
- Galvanized finish.

YOKE 8-807 Screw Pin Anchor Shackles meet the performance requirements of Federal Specification RR-C-271F, Type 4A , Grade B, Class 2.


Digital Chip embedded with Certificate for serial Traceability

Forged Alloy Anchor shackle
with Screw Pin

Item No.	Nominal Size	Working Load Limit	Dimensions (inch)							N.W.
	inch	tonnes*	A	B	D	E	G	H	W	lbs
8-807-08	5/16	1.2	1.22	0.31	0.37	0.83	0.75	2.13	0.47	0.2
8-807-10	3/8	2	1.42	0.39	0.43	1.02	0.91	2.56	0.63	0.2
8-807-11	7/16	2.7	1.70	0.43	0.51	1.18	1.06	2.95	0.75	0.4
8-807-13	1/2	3.3	1.85	0.52	0.63	1.30	1.18	3.34	0.79	0.7
8-807-16	5/8	5	2.40	0.63	0.75	1.77	1.53	4.21	1.06	1.3
8-807-19	3/4	7	2.83	0.75	0.87	1.97	1.81	4.96	1.30	2.2
8-807-22	7/8	9.5	3.39	0.87	1.02	2.28	2.09	5.82	1.50	3.3
8-807-26	1	12.5	3.78	1.02	1.10	2.68	2.36	6.53	1.73	5.1
8-807-28	1 1/8	15	4.37	1.10	1.26	2.91	2.68	7.48	1.81	7.0
8-807-32	1 1/4	18	4.76	1.26	1.42	3.22	2.99	8.26	2.12	9.7
8-807-36	1 3/8	21	5.28	1.42	1.50	3.62	3.31	9.13	2.32	13.2

Item No.	Nominal Size	Working Load Limit	Dimensions (mm)							N.W.
	mm	tonnes*	A	B	D	E	G	H	W	kg
8-807-08	8	1.2	31	8	9.5	21	19	54	12	0.1
8-807-10	10	2	36	10	11	26	23	65	16	0.1
8-807-11	11	2.7	43	11	13	30	27	75	19	0.2
8-807-13	13	3.3	47	13	16	33	30	85	20	0.3
8-807-16	16	5	61	16	19	43	39	107	27	0.6
8-807-19	19	7	72	19	22	50	46	126	33	1.0
8-807-22	22	9.5	86	22	26	58	53	148	38	1.5
8-807-26	26	12.5	96	26	28	68	60	166	44	2.3
8-807-28	28	15	111	28	32	74	68	190	46	3.2
8-807-32	32	18	121	32	36	84	76	210	54	4.4
8-807-36	36	21	134	36	38	92	84	232	59	6.0

★ Minimum Ultimate Load is 5 times the Working Load Limit.
Maximun Proof Load is 2 times the Working Load Limit.

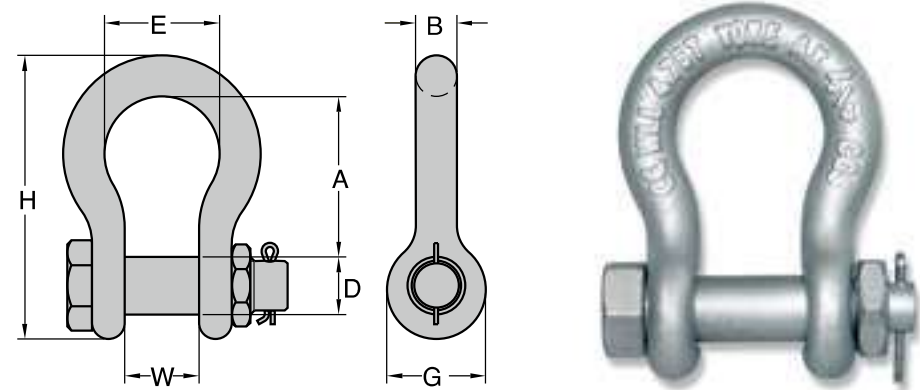

YOKE 8-838 Carbon Bolt Type Anchor Shackles meet the performance requirements of Federal Specification RR-C-271F, Type 4A, Grade A, Class 3.

- Shackles are Type Approved by DNV & ABS.
- Shackles are forged carbon steel with alloy pin.
- Size and the Working Load Limit permanently shown on each shackle.
- All shackles with Batch Code which links to Test Certificate and quality traceability.
- 100% magnaflux crack detection during manufacturing.
- 20,000 cycle fatigue rated to 1.5 times Working Load Limit.
- Galvanized finish.

Digital Chip embedded with Certificate for serial Traceability


Forged Anchor Shackle

with Bolt Pin. Carbon Steel

Item No.	Nominal Size	Working Load Limit	Dimensions (inch)							N.W.
	inch		A	B	D	E	G	H	W	lbs
8-838-08	5/16	0.75	1.22	0.31	0.37	0.82	0.75	2.13	0.47	0.2
8-838-10	3/8	1	1.42	0.39	0.43	1.02	0.91	2.56	0.63	0.2
8-838-11	7/16	1.5	1.70	0.43	0.51	1.18	1.06	2.95	0.75	0.4
8-838-13	1/2	2	1.85	0.52	0.63	1.30	1.18	3.34	0.79	0.9
8-838-16	5/8	3.25	2.40	0.63	0.75	1.70	1.50	4.17	1.06	1.5
8-838-19	3/4	4.75	2.83	0.75	0.87	1.97	1.81	5.04	1.30	2.2
8-838-22	7/8	6.5	3.39	0.87	1.02	2.28	2.09	5.91	1.50	3.7
8-838-26	1	8.5	3.78	1.02	1.10	2.68	2.40	6.57	1.73	5.3
8-838-28	1 1/8	9.5	4.37	1.10	1.26	2.91	2.68	7.52	1.81	7.5
8-838-32	1 1/4	12	4.76	1.26	1.42	3.30	2.99	8.07	2.12	10.6
8-838-36	1 3/8	13.5	5.28	1.42	1.50	3.62	3.31	9.13	2.32	14.3
8-838-38	1 1/2	17	5.57	1.50	1.77	3.90	3.62	10.00	2.36	19.4
8-838-45	1 3/4	25	7.00	1.85	2.00	5.00	4.17	12.32	2.87	38.5
8-838-50	2	35	7.76	2.09	2.24	5.75	4.80	13.66	3.27	53.2

Item No.	Nominal Size	Working Load Limit	Dimensions (mm)							N.W.
	mm		A	B	D	E	G	H	W	kg
8-838-08	8	0.75	31	8	9.5	21	19	54	12	0.1
8-838-10	10	1	36	10	11	26	23	65	16	0.1
8-838-11	11	1.5	43	11	13	30	27	75	19	0.2
8-838-13	13	2	47	13	16	33	30	85	20	0.4
8-838-16	16	3.25	61	16	19	43	38	106	27	0.7
8-838-19	19	4.75	72	19	22	50	46	126	33	1.0
8-838-22	22	6.5	86	22	26	58	53	148	38	1.7
8-838-26	26	8.5	96	26	28	68	61	166	44	2.4
8-838-28	28	9.5	111	28	32	74	68	190	46	3.4
8-838-32	32	12	121	32	36	84	76	210	54	4.8
8-838-36	36	13.5	134	36	38	92	84	232	59	6.5
8-838-38	38	17	146	38	45	99	92	254	60	8.8
8-838-45	45	25	178	47	51	127	106	313	73	17.5
8-838-50	50	35	197	53	57	146	122	347	83	24.2

★ Minimum Ultimate Load is 6 times the Working Load Limit.
Maximun Proof Load is 2 times the Working Load Limit.

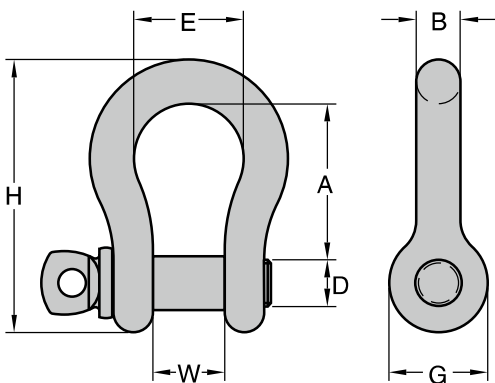

- Shackles are Type Approved by DNV & ABS.
- Shackles are forged carbon steel with alloy pin.
- Size and the Working Load Limit permanently shown on each shackle.
- All shackles with Batch Code which links to Test Certificate and quality traceability.
- 100% magnaflux crack detection during manufacturing.
- 20,000 cycle fatigue rated to 1.5 times Working Load Limit.
- Galvanized finish.

YOKE 8-837 Carbon Bolt Type Anchor Shackles meet the performance requirements of Federal Specification RR-C-271F, Type 4A, Grade A, Class 2.

Digital Chip embedded with Certificate for serial Traceability

Forged Anchor Shackle

with Screw Pin. Carbon Steel

Item No.	Nominal Size	Working Load Limit	Dimensions (inch)							N.W.
	inch		A	B	D	E	G	H	W	lbs
8-837-05	3/16	0.3	0.87	0.2	0.25	0.69	0.57	1.48	0.38	0.05
8-837-06	1/4	0.5	1.10	0.26	0.32	0.80	0.63	1.85	0.47	0.1
8-837-08	5/16	0.75	1.22	0.31	0.37	0.82	0.75	2.13	0.47	0.2
8-837-10	3/8	1	1.42	0.39	0.43	1.02	0.91	2.56	0.63	0.2
8-837-11	7/16	1.5	1.70	0.43	0.51	1.18	1.06	2.95	0.75	0.4
8-837-13	1/2	2	1.85	0.52	0.63	1.30	1.18	3.34	0.79	0.7
8-837-16	5/8	3.25	2.40	0.63	0.75	1.70	1.50	4.17	1.06	1.3
8-837-19	3/4	4.75	2.83	0.75	0.87	1.96	1.81	5.04	1.30	2.2
8-837-22	7/8	6.5	3.39	0.87	1.02	2.28	2.08	5.91	1.50	3.3
8-837-26	1	8.5	3.78	1.02	1.10	2.68	2.67	6.57	1.73	5.1
8-837-28	1 1/8	9.5	4.37	1.10	1.26	2.91	2.68	7.52	1.81	7.0
8-837-32	1 1/4	12	4.76	1.26	1.42	3.30	2.99	8.07	2.12	9.9
8-837-36	1 3/8	13.5	5.28	1.42	1.50	3.62	3.30	9.13	2.32	13.9
8-837-38	1 1/2	17	5.75	1.50	1.77	3.90	3.62	10.00	2.36	17.8
8-837-45	1 3/4	25	7.00	1.85	2.00	5.00	4.17	12.32	2.87	35.9
8-837-50	2	35	7.76	2.09	2.24	5.75	4.80	13.66	3.27	51.0

Item No.	Nominal Size	Working Load Limit	Dimensions (mm)							N.W.
	mm		A	B	D	E	G	H	W	kg
8-837-05	5	0.3	22	5	6	17	15	38	10	0.021
8-837-06	6	0.5	28	6.5	8	20	16	47	12	0.05
8-837-08	8	0.75	31	8	9.5	21	19	54	12	0.1
8-837-10	10	1	36	10	11	26	23	65	16	0.1
8-837-11	11	1.5	43	11	13	30	27	75	19	0.2
8-837-13	13	2	47	13	16	33	30	85	20	0.3
8-837-16	16	3.25	61	16	19	43	38	106	27	0.6
8-837-19	19	4.75	72	19	22	50	46	126	33	1.0
8-837-22	22	6.5	86	22	26	58	53	148	38	1.5
8-837-26	26	8.5	96	26	28	69	61	166	44	2.3
8-837-28	28	9.5	111	28	32	74	68	190	46	3.2
8-837-32	32	12	121	32	36	84	76	210	54	4.5
8-837-36	36	13.5	134	36	38	92	84	232	59	6.3
8-837-38	38	17	146	38	45	99	92	254	60	8.1
8-837-45	45	25	178	47	51	127	106	313	73	16.3
8-837-50	50	35	197	53	57	146	122	347	83	23.2

★ Minimum Ultimate Load is 6 times the Working Load Limit.
Maximun Proof Load is 2 times the Working Load Limit.

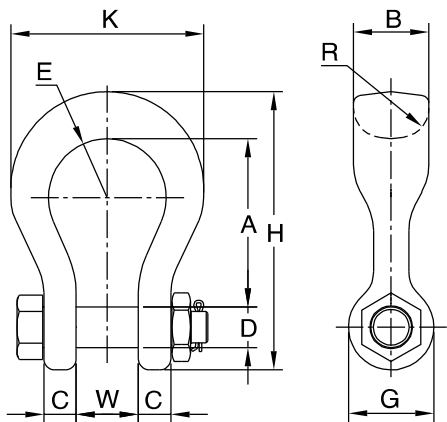


Fig. 1

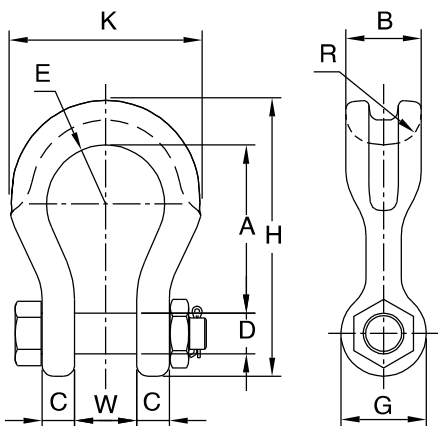


Fig. 2



Digital Chip embedded
with Certificate
for serial Traceability

Forged Alloy Wide Body Shackle
with Bolt Pin

Item No.	Nominal Size	Working Load Limit	Dimensions (inch)										N.W.
	inch		A	B	C	D	E	G	H	K	R	W	lbs
8-809-19	3/4	7	3.58	1.61	0.70	0.87	1.26	1.81	5.90	4.09	1.26	1.30	3.7
8-809-26	1	12.5	4.64	2.12	0.91	1.14	1.61	2.40	7.64	5.51	1.38	1.73	8.4
8-809-32	1 1/4	18	5.83	2.52	1.18	1.42	2.00	2.68	9.37	6.77	1.50	2.13	14.7
8-809-38	1 1/2	30	6.93	3.15	1.38	1.77	2.50	3.50	11.38	8.50	1.77	2.36	27.5

- ★ Minimum Ultimate Load is 5 times the Working Load Limit.
Maximun Proof Load is 2 times the Working Load Limit.
- ★ 8-809-19/-26 See Figure 1
- ★ 8-809-32/-38 See Figure 2

Item No.	Nominal Size	Working Load Limit	Dimensions (mm)										N.W.
	mm		A	B	C	D	E	G	H	K	R	W	kg
8-809-19	19	7	91	41	18	22	32	46	150	104	32	33	1.7
8-809-26	26	12.5	118	54	23	29	41	61	194	140	35	44	3.8
8-809-32	32	18	148	64	30	36	51	68	238	172	38	54	6.7
8-809-38	38	30	176	80	35	45	64	89	289	216	45	60	12.5

- ★ Minimum Ultimate Load is 5 times the Working Load Limit.
Maximun Proof Load is 2 times the Working Load Limit.