




FORGED LEVER LOAD BINDER

- Made from quenched and tempered alloy steel.
- Extra heavy construction at leverage point to prevent spreading heel of binder toggles away from load, permitting easy release.
- Ball and socket swivel joints at hook assemblies permit a straightline pull




Model :LLB

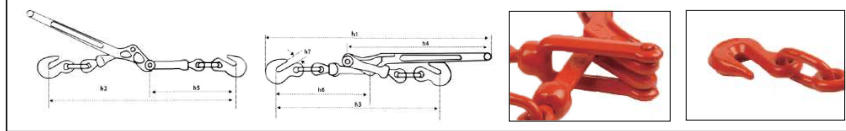

SPECIFICATIONS

Min-Max chain size (in.)	WLL (lbs)	Proof load (lbs)	Min ultimate load (lbs)	Weight (lbs)	Handle length (in.)	Dimensions(in.)						
						H1	H2	H3	H4	H5	H6	H7
1/4-5/16	2600	5200	7800	3.52	11.42	18.5	17.3	14.17	11.42	8.27	8.07	0.35
5/16-3/8	5400	10800	19000	8.37	15.43	25.2	23.2	19.49	15.55	11.22	11.22	0.51
3/8-1/2	9200	18400	28000/33000	12.11/12.20	17.24	28.5	26.38	22.05	17.64	12.99	12.20	0.59
1/2-5/8	11000	22000	44000	19.7	21.00	33.86	30.12	25.78	20.87	14.37	14.37	0.74

FORGED RATCHET LOAD BINDER

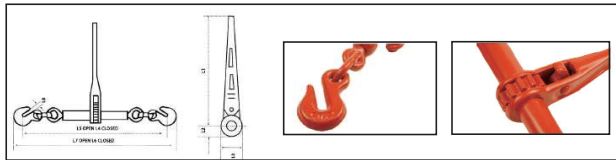

Model :RLB

SPECIFICATIONS

Min-max chain size (in.)	WLL (lbs)	Proof load (lbs)	Min ultimate load (lbs)	Weight (lbs)	Handle length (in.)	Dimensions(in.)							
						L1	L2	L3	L4	L5	L6	L7	L8
1/4-5/16	2600	5200	7800	3.52	7.16	7.16	0.89	1.77	16.22	21.26	17.79	22.83	0.35
5/16-3/8	5400	10800	19000	10.50	13.42	13.92	1.30	2.60	22.64	30.64	25.25	33.24	0.51
3/8-1/2	9200	18400	33000	12.90	13.92	13.92	1.30	2.60	24.13	32.13	27.04	33.04	0.59
1/2-5/8	13000	26000	46000	14.38	13.92	13.92	1.30	2.60	26.45	34.45	30.07	36.07	0.74




FORGED D-RINGS WITH WRAPS

- Material: Forged superalloy steel.
- 100% magna flux crack detection.
- Breakage test.
- Welding is to be performed by a qual fied welder.




Stock No.	Dimensions(mm)					W.L.L.(T)	Weight(KG)
	A	B	D	H	M		
TLDRW0112	41.0	78.0	13.0	30.0	37.0	1.12	0.40
TLDRW0200	42.0	88.0	14.0	33.0	40.0	2	0.48
TLDRW0315	45.0	94.0	17.0	35.0	42.5	3.15	0.69
TLDRW0530	55.0	118.0	22.0	47.5	51.0	5.3	1.50
TLDRW0800	70.5	140.0	26.0	56.5	65.0	8	2.50
TLDRW1000	85.0	165.0	30.0	70.0	80.0	10	4.25
TLDRW1500	98.0	189.0	34.0	77.0	90.0	15	5.79
TLDRW2000	147	278	46.0	85.0	121	20	15.1



Model :DRW

Muti -Directional Using Lifting Swivel

Stock No.	Size D*E	Dimensions(mm)					W	Ø	W.L.L.(T)		Weight(KG)
		A	B	C	G	T			90°	0°	
TLDL50813	M8x13	55.0	36.0	15.5	52.0	44.0	30.0	13.0	0.3	0.6	0.43
TLDL51019	M10x19	55.0	36.0	15.5	52.0	44.0	30.0	13.0	0.45	0.9	0.45
TLDL51219	M12x19	55.0	36.0	15.5	52.0	44.0	30.0	13.0	0.5	1	0.46
TLDL510318	M12x31.8	55.0	36.0	15.5	52.0	44.0	30.0	13.0	0.5	1	0.47
TLDL51422	M14x22	55.0	36.0	15.5	52.0	44.0	30.0	13.0	1.12	2	0.48
TLDL514318	M14x31.8	55.0	36.0	15.5	52.0	44.0	30.0	13.0	1.12	2	0.49
TLDL516319	M16x31.8	55.0	36.0	15.5	52.0	44.0	30.0	13.0	1.12	2	0.50
TLDL52030	M20x30	85.0	60.0	22.5	81.0	69.0	40.0	18.0	2	4	1.57
TLDL520318	M20x38.1	85.0	60.0	22.5	81.0	69.0	40.0	18.0	2	4	1.58
TLDL52230	M22x30	85.0	60.0	22.5	81.0	69.0	40.0	18.0	2	4	1.58
TLDL522381	M22x38.1	85.0	60.0	22.5	81.0	69.0	40.0	18.0	2	4	1.59
TLDL52430	M24x30	85.0	60.0	22.5	81.0	69.0	40.0	18.0	3.15	6.3	1.61
TLDL524381	M24x38.1	85.0	60.0	22.5	81.0	69.0	40.0	18.0	3.15	6.3	1.62
TLDL52735	M27x35	85.0	60.0	22.5	81.0	69.0	40.0	18.0	3.15	6.3	1.62
TLDL53035	M30x35	115.0	80.0	26.5	110.0	90.0	50.0	25.0	5.3	10.6	3.72
TLDL53050	M30x50	115.0	80.0	26.5	110.0	90.0	50.0	25.0	5.3	10.6	3.75
TLDL53335	M33x35	115.0	80.0	26.5	110.0	90.0	50.0	25.0	8	11.8	3.75
TLDL53350	M33x50	115.0	80.0	26.5	110.0	90.0	50.0	25.0	8	11.8	3.77
TLDL53654	M36x54	115.0	80.0	26.5	110.0	90.0	50.0	25.0	8	11.8	3.81
TLDL53958	M39x58	115.0	80.0	26.5	110.0	90.0	50.0	25.0	8	8	3.86




Model :DLS



CHAIN AND CHAIN SLING

- Alloy chain is designed and manufactured for superior performance and usage. It can easily withstand more abuse, abrasion resistance, greater load lifting per size and is lighter to handle for application.
- Alloy steel Material, heat treated and proof tested



Model :AW

Item No.	Chain Dia. p (mm)	Inside Length P (mm)	Alloy Chain GR80		WLL(t)	Ultimate Load(t)	Weight Approx(kg)
			Outside Width W (mm)	Inside Width W1 (mm)			
AW-80-05	5	15.00	16.25	6.80	0.65	2.60	0.50
AW-80-06	6	18.00	19.50	8.00	1.00	4.00	0.80
AW-80-063	6.3	19.80	21.50	8.50	1.41	5.00	0.84
AW-80-07	7	21.00	22.75	9.00	1.41	5.00	1.10
AW-80-071	7.1	21.30	24.00	9.30	1.60	6.40	1.15
AW-80-08	8	24.00	26.00	10.00	2.00	8.00	1.40
AW-80-09	9	27.00	29.25	12.20	2.50	10.00	1.82
AW-80-10	10	30.00	32.50	13.30	3.20	12.80	2.20
AW-80-112	11.2	34.00	36.00	13.70	3.80	15.20	2.70
AW-80-13	13	39.00	42.25	17.50	5.00	20.00	3.70
AW-80-16	16	48.00	52.00	21.50	8.00	32.00	5.60

- Original Germany WAFIOS Knitting, Spot welding calibrating and heat treatment machines and facilities are used for our daily production.

Item No.	Chain Dia. mm	In.	Inside length (mm)	SUPER HIGH STRENGTH CHAIN GR100		WLL(t)	Ultimate load(t)	Weight Approx(kg)
				Outside width (mm)	Inside width (mm)			
AW-100-05	5	0.20	15.00	16.25	10.00	0.65	3.25	0.53
AW-100-06	6	0.24	18.00	19.50	12.00	1.00	5.00	0.85
AW-100-08	8	0.31	24.00	26.00	16.00	2.00	10.0	1.46
AW-100-10	10	0.39	30.00	32.50	20.00	3.20	16.0	2.30
AW-100-13	13	0.51	39.00	42.25	26.00	5.00	25.0	3.82

GUIDE FOR SAFER AND LONGER USE OF SLING

Do

- Do select right capacity slings including angles of sling leg.
- Do ensure that the chain slings are not kinked and twisted.
- Do lift uniformly the load in the multi-leg slings.

Do Not

- Do not expose the chain slings to excessive heat, as working load limit is affected by the heat higher than the temperature in the table.
- Do not drag the chain slings on the ground.
- Do not heat the chain slings.



Model :TDC



Tie Down chain GR80 type: TDC		
Chain Dia.(mm)	Length(ft.)	N.W.(kg)
7.1	9	3.3
8.0	9	4.2
10.0	9	6.5
13.0	9	10.8
7.1	18	6.3
8.0	18	8.5
10.0	18	13.2
13.0	18	21.6



Model :BC70

Size	Binder chain grade70 type: BC70				ASTM80				NACM90				MACM96				Pes per drum
	W.T.(kg)	WLL(lb)	MBS(lb)	W.T.(kg)	WLL(lb)	MBS(lb)	W.T.(kg)	WLL(lb)	W.T.(kg)	WLL(lb)	MBS(lb)	W.T.(kg)	WLL(lb)	MBS(lb)	W.T.(kg)	WLL(lb)	
1/4" x 14'	5.0	3,150	12,600	4.5	3,150	12,100	4.5	3,150	12,600	50							
1/4" x 16'	6.0	3,150	12,600	5.0	3,150	12,100	5.0	3,150	12,600	40							
5/16" x 14'	7.5	4,700	18,800	7.0	4,700	18,800	7.0	4,700	18,800	35							
5/16" x 16'	8.5	4,700	18,800	8.0	4,700	18,800	8.0	4,700	18,800	30							
5/16" x 18'	9.5	4,700	18,800	9.0	4,700	18,800	9.0	4,700	18,800	30							
5/16" x 20'	10.5	4,700	18,800	10.0	4,700	18,800	10.0	4,700	18,800	25							
5/16" x 25'	13.0	4,700	18,800	12.0	4,700	18,800	12.0	4,700	18,800	20							
5/16" x 30'	15.5	4,700	18,800	14.5	4,700	18,800	14.5	4,700	18,800	20							
3/8" x 14'	10.5	6,600	26,400	9.5	6,600	24,700	10.0	6,600	26,400	25							
3/8" x 16'	12.0	6,600	26,400	11.0	6,600	24,700	11.5	6,600	26,400	20							
3/8" x 20'	15.0	6,600	26,400	13.5	6,600	24,700	14.5	6,600	26,400	20							
3/8" x 25'	18.5	6,600	26,400	16.5	6,600	24,700	18.0	6,600	26,400	15							



CARGO TROLLEY

Turnable with bearings

SPECIFICATIONS


Item No.	Capacity(t)	N.W.(kg)
RSA06	6	13.95
RSA08	8	20.8
RSA12	12	27.1
RSA18	18	42.45



Model : RSA

ROLLER SKATES

Mode	RS-W-6	RS-W-8	RS-W-12	RS-W-15	RS-W-24	RS-W-30
Maximum load(T)	6	8	12	15	24	30
Normal load(T)	4	6	8	12	18	24
LxWxH(mm)	80x70	80x70	80x70	80x70(Double)	80x70(Double)	100x70(Double)
Net Weight(kg)	14	20	32	36	52	86
Number of wheels	4	6	8	6	8	8
The material of wheel	PU wheel		Steel wheel			

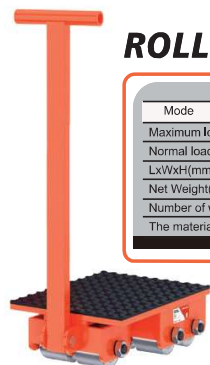

Model : RS-W

- Shifting skates can be used wherever heavy objects have to be moved. The load can be lifted using either the roller crowbar or a jack, allowing the skates to be easily positioned.
- The large diameter sealed nylon roller ensure ease of movement and spread the load, protecting high quality floors from damage caused by highpoint loads and oil/grease contamination.



Model : RS-C


Mode	RS-C-2	RS-C-4	RS-C-6	RS-C-10	RS-C-15
Maximum load(T)	3	5	8	12	18
Normal load(T)	2	4	6	10	15
LxWxH(mm)	500x480x110	630x550x110	630x550x110	650x560x110	720x620x110
Net Weight(kg)	20.5	32.5	45	67	88
Number of wheels	3	5	3	4	5
The material of wheel	PU wheel / Steel wheel				




HYDRAULIC HAND PALLET TRUCK

AC SERIES

The Hand Pallet Truck is the ideal "storage aid" and "handling partner" for all manual transport tasks over short distances, excellently suitable for use on lorries, in small warehouses and markets ect.

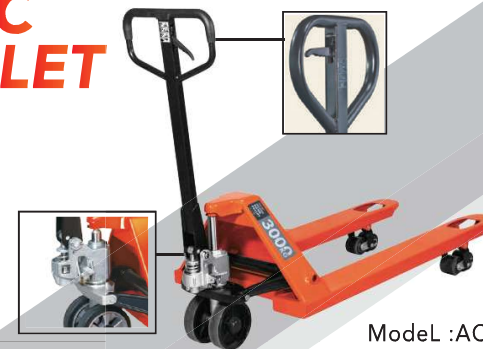

Model : AC



Model	AC 2.0	AC 2.5	AC 3.0	AC 5.0
Capacity(kg)	2000	2500	3000	5000
Min. fork height(mm)	85/75	85/75	85/75	85/75
Max. fork height(mm)	195/185	195/185	195/185	195/185
Lifting height(mm)	110	110	110	110
Fork length(mm)	1150/1220	1150/1220	1150/1220	1150/1220
Single fork width(mm)	160	160	160	160
Width overall forks(mm)	550/685	550/685	550/685	550/685
Fork wheel-single(mm)	80X50/74X50	80X50/74X50	80X50/74X50	80X50/74X50
Fork wheel-diameter(mm)	80X70	80X70	80X70	80X70
Steering wheel(mm)	180X50	180X50	180X50	180X50
Self weight(kg)	73-82	73-82	73-82	73-82
Qty/20'feet container (pcs)	180/144	180/144	180/144	180/144

CW SERIES

Hand Pallet Truck with scale is an excellent economic solution for all weighing requirements in a busy warehouse environments, which allows you to weigh cargo where you want and when you want.



High precision sensor



Print function



High precision digital display

Model	CW
Capacity(kg)	1500/2000/2500/3000
Total lift height(mm)	195
Lowered fork height(mm)	85
Fork length(mm)	1150/1220
Width overall forks(mm)	550/685
Steering wheel(mm)	φ 180x50
Fork wheel(mm)	φ 80x70
Truck weight(kg)	120-130



Model : CW