TOYO-INTL®

GEARED TROLLEY

- High grade sealed ball bearings.
- With anti - drop plates.
- Galvanized hand chain.
- All structural parts made of high quality steel.
- Adjustable to any beam width, simply by adjusting the number of collars.
- For geared trolley, the standard operating length is 3 meter, other length is available upon request.

ADJUSTABLE WIDTH
The wheels are made to fit any shape of a beam.



GEAR GUIDE MECHANISM
Gear guide mechanism in flanged load sheave and guide roller facilitate smooth movement.

ModeL :GCL-B

TECHNICAL SPECIFICATION

Capacity (t)	I-BEAM(mm) M	Dimensions(mm) A	B	C	E	H	F	Net weight (kg)	Carton Size (mm)
1T*5M	75-120mm	258	250	214	11	118	1，5-3	13,2	305*160*175
2T*5M	80-140mm	284	270	227	14	125	1，5-3	17.8	330*170*205
3T*5M	80-142mm	312	315	304	8	165	1，5-3	26.1	390*200*235
5T*5M	95-168mm	365	358	334	21	183	1，5-3	39.4	440*235*270
10T*5M	100-255mm	458	430	434	36	250	1，5-3	75	590*310*400
20T*5M	140-210mm	595	518	524	45	324	1，5-3	190	610*415*525

EN STOCK

JAPAN INSPECTED

PLAIN TROLLEY

- All structural parts made of high quality steel.
- Adjustable to any beam width, simply by adjusting the number of collars.
- High grade sealed ball bearings.
- With anti - drop plates.
- Galvanized hand chain.

ModeL :GCT-B

MOVEMENT MECHANISM
Trolley moves smoothly on cast iron flanged wheels equipped with sealed, lubed for life ball bearings.

ADJUSTABLE WIDTH
The wheels are made to fit any shape of a beam.

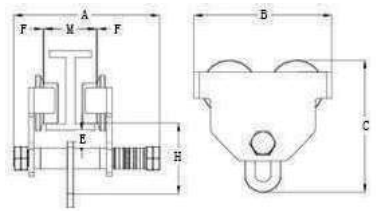

TECHNICAL SPECIFICATION

Capacity (t)	I-BEAM(mm) M	Dimensions(mm) A	B	C	E	H	F	Net weight (kg)	Carton Size (mm)
0,5T	75-120mm	198	204	188	23	113	1.5-3	6	295*75*185
1T	80-140mm	220	250	214	11	118	1.5-3	8	310*100*200
2T	80-142mm	243	270	227	14	125	1.5-3	11	340*130*210
3T	95-168mm	268	315	304	8	165	1.5-3	22	395*130*250
5T	100-255mm	305	358	334	21	183	1.5-3	30	440*150*300
10T	140-210mm	405	430	434	36	250	1.5-3	79	500*280*350