

Weatherly #148  
27.12 (Industrial)  
August 2022

Supersedes 27.12 (Industrial) | April, 2019



# PEERLESS®

A KITO GROUP COMPANY

## 2023

OVERHEAD LIFTING



CARGO CONTROL



HARDWARE



MARINE




Visit Us Online: [www.peerlesschain.com](http://www.peerlesschain.com) | 800.873.1916



Sling Hooks

V10™ Eye Sling Hook w/Latch (Grade 100)


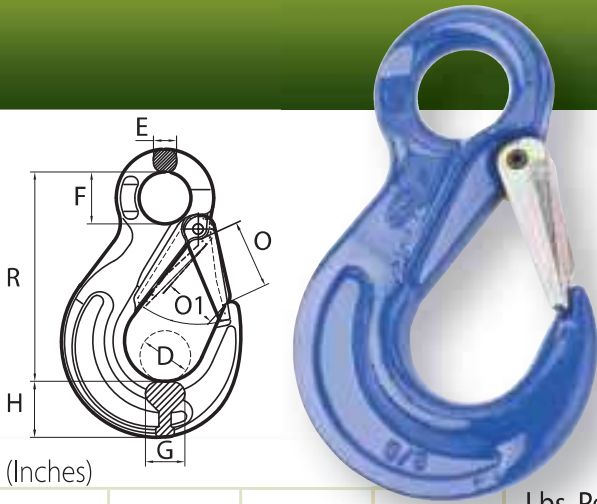


| Stock # | Mfr. #   | Chain Size |     | Dimensions (Inches) |       |       |       |       |       |       |        | Lbs. Per Each | WLL (Lbs.) |
|---------|----------|------------|-----|---------------------|-------|-------|-------|-------|-------|-------|--------|---------------|------------|
|         |          | Inches     | MM  | D                   | E     | F     | G     | H     | O     | O1    | R      |               |            |
| 8417100 | SHE6     | 1/4        | 6   | 0.709               | 0.394 | 0.787 | 0.650 | 0.827 | 0.984 | 0.748 | 3.327  | 0.73          | 3,100      |
| 8417200 | SHE7-8   | 9/32- 5/16 | 7-8 | 0.945               | 0.433 | 0.984 | 0.748 | 1.063 | 1.260 | 0.984 | 4.173  | 1.23          | 5,700      |
| 8417400 | SHE10    | 3/8        | 10  | 1.181               | 0.630 | 1.339 | 1.024 | 1.299 | 1.575 | 1.220 | 5.157  | 2.65          | 8,800      |
| 8417600 | SHE13    | 1/2        | 13  | 1.496               | 0.748 | 1.693 | 1.299 | 1.654 | 1.890 | 1.535 | 6.457  | 5.18          | 15,000     |
| 8417700 | SHE16    | 5/8        | 16  | 1.732               | 0.984 | 1.969 | 1.575 | 1.969 | 2.165 | 1.772 | 7.185  | 8.20          | 22,600     |
| 8417800 | SHE19-20 | 3/4        | 20  | 2.087               | 1.063 | 2.165 | 1.890 | 2.126 | 2.402 | 2.126 | 8.071  | 13.12         | 35,300     |
| 8417900 | SHE22    | 7/8        | 22  | 2.362               | 1.181 | 2.362 | 1.969 | 2.402 | 2.795 | 2.402 | 8.858  | 17.35         | 42,700     |
| 8418000 | SHE26    | 1          | 26  | 2.835               | 1.417 | 2.756 | 2.362 | 2.717 | 3.307 | 2.874 | 10.433 | 30.43         | 59,700     |

Accoloy® Eye Sling Hooks

| Stock #    |           | Chain Size |    |       | Dimensions (Inches) |       |       |       |        |        |       | Lbs. Per Each | WLL (Lbs.) |
|------------|-----------|------------|----|-------|---------------------|-------|-------|-------|--------|--------|-------|---------------|------------|
| Red        |           | Inches     | MM | Grade | D                   | E     | F     | G     | H      | I      | K     |               |            |
| No-Latch   | w/Latch   |            |    |       |                     |       |       |       |        |        |       |               |            |
| 592353080  | 592300180 | 9/32       | 7  | 100   | 3.813               | 1.219 | 0.625 | 0.688 | 5.219  | 3.625  | 1.063 | 1.0           | 4,300      |
| 592353081  | 592300181 | 3/8        | 10 | 100   | 5.375               | 1.625 | 0.813 | 0.938 | 7.250  | 4.813  | 1.375 | 2.5           | 8,800      |
| 592353082  | 592300182 | 1/2        | 13 | 100   | 6.563               | 2.000 | 1.031 | 1.188 | 8.938  | 6.063  | 1.813 | 5.3           | 15,000     |
| 592353083  | 592300183 | 5/8        | 16 | 100   | 7.750               | 2.438 | 1.250 | 1.313 | 10.375 | 7.156  | 2.125 | 7.9           | 22,600     |
| 592303084  | 592300184 | 3/4        | 20 | 80    | 8.875               | 2.688 | 1.500 | 1.500 | 11.938 | 7.875  | 2.313 | 11.2          | 28,300     |
| 592303085  | ---       | 7/8        | 22 | 80    | 10.125              | 3.000 | 1.750 | 1.750 | 13.750 | 9.156  | 2.750 | 19.6          | 34,200     |
| *592303086 | ---       | 1          | 26 | 80    | 11.063              | 3.375 | 2.000 | 1.875 | 15.000 | 10.063 | 3.000 | 21.8          | 47,700     |
| *592303088 | ---       | 1-1/4      | 32 | 80    | 13.125              | 4.063 | 2.250 | 2.313 | 18.000 | 12.313 | 3.750 | 44.4          | 72,300     |

\* Latch eye hole drilled only by request.

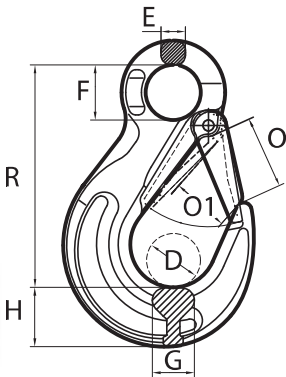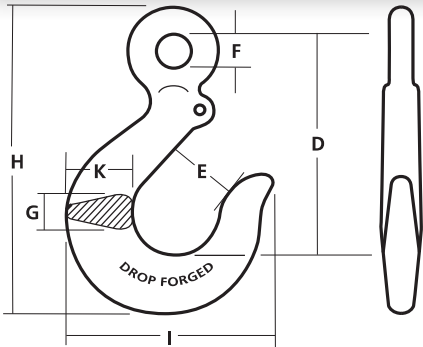

Peer-Lift® Eye Sling Hook w/Latch (Grade 80)


| Stock #  | Chain Size |     | Dimensions (Inches) |      |      |      |      |      |      |      | Lbs. Per Each | WLL (Lbs.) |
|----------|------------|-----|---------------------|------|------|------|------|------|------|------|---------------|------------|
|          | Inches     | MM  | D                   | E    | F    | G    | H    | O    | O1   | R    |               |            |
| Black    | 9/32-5/16  | 7-8 | 0.95                | 0.43 | 0.98 | 0.75 | 1.06 | 1.26 | 0.98 | 4.17 | 1.23          | 4,500      |
| 8417480* | 3/8        | 10  | 1.18                | 0.63 | 1.34 | 1.02 | 1.30 | 1.57 | 1.22 | 5.16 | 2.65          | 7,100      |
| 8417680* | 1/2        | 13  | 1.50                | 0.75 | 1.69 | 1.30 | 1.65 | 1.89 | 1.54 | 6.46 | 5.18          | 12,000     |
| 8417780* | 5/8        | 16  | 1.73                | 0.98 | 1.97 | 1.57 | 1.97 | 2.17 | 1.77 | 7.19 | 8.20          | 18,100     |
| 8417880  | 3/4        | 20  | 2.09                | 1.06 | 2.17 | 1.89 | 2.13 | 2.40 | 2.13 | 8.07 | 13.12         | 28,300     |
| 8417980  | 7/8        | 22  | 2.36                | 1.18 | 2.36 | 1.97 | 2.40 | 2.80 | 2.40 | 8.86 | 17.35         | 34,200     |

\*Replaces: 8517280 - 9/32", 8517480 - 3/8", 8517680 - ½", 8517780 - 5/8"






# SLING HOOKS

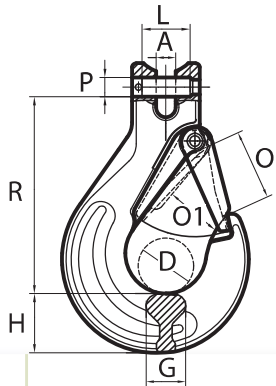


## V10™ Clevis Sling Hook w/Latch (Grade 100)

| Stock # | Mfr. #   | Chain Size |     | Dimensions (Inches) |       |       |       |       |       |       |             | Lbs. Per Each | WLL (Lbs.) |
|---------|----------|------------|-----|---------------------|-------|-------|-------|-------|-------|-------|-------------|---------------|------------|
|         |          | Inches     | MM  | A                   | D     | G     | H     | O     | O1    | R     | PxL         |               |            |
| 8418100 | SHC6     | 1/4        | 6   | 0.276               | 0.709 | 0.650 | 0.787 | 0.984 | 0.748 | 2.717 | 0.29 x 0.65 | 0.60          | 3,100      |
| 8418200 | SHC7-8   | 9/32- 5/16 | 7-8 | 0.354               | 0.984 | 0.748 | 1.102 | 1.260 | 1.024 | 3.720 | 0.38 x 0.91 | 1.35          | 5,700      |
| 8418400 | SHC10    | 3/8        | 10  | 0.453               | 1.181 | 0.984 | 1.299 | 1.535 | 1.220 | 4.291 | 0.49 x 1.16 | 2.47          | 8,800      |
| 8418600 | SHC13    | 1/2        | 13  | 0.571               | 1.496 | 1.181 | 1.575 | 1.890 | 1.535 | 5.315 | 0.63 x 1.46 | 4.41          | 15,000     |
| 8418700 | SHC16    | 5/8        | 16  | 0.689               | 1.732 | 1.457 | 1.850 | 2.165 | 1.772 | 6.102 | 0.79 x 2.05 | 7.50          | 22,600     |
| 8418800 | SHC19-20 | 3/4        | 20  | 0.906               | 2.047 | 2.008 | 1.969 | 2.402 | 2.087 | 7.205 | 0.94 x 2.87 | 14.99         | 35,300     |
| 8418900 | SHC22    | 7/8        | 22  | 0.965               | 2.362 | 1.969 | 2.402 | 2.795 | 2.402 | 8.346 | 1.06 x 2.80 | 19.84         | 42,700     |

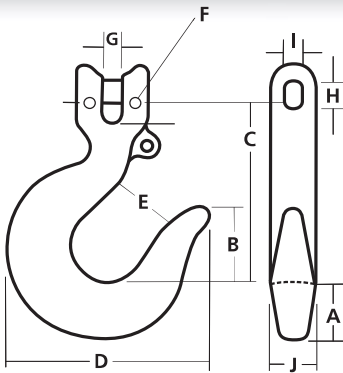

## Kuplex® Clevis Sling Hook

| Stock #   | Hook | Stock #   |         | Chain Size |    |       | Dimensions (Inches) |       |        |        |       |       |       |       |       |       | Lbs. |        |
|-----------|------|-----------|---------|------------|----|-------|---------------------|-------|--------|--------|-------|-------|-------|-------|-------|-------|------|--------|
| Red       | #    | Red       | Hook #  |            |    |       |                     |       |        |        |       |       |       |       |       |       | Per  |        |
| No Latch  |      |           | w/Latch | Inches     | MM | Grade | A                   | B     | C      | D      | E     | F     | G     | H     | I     | J     | Each | (Lbs.) |
| 598850080 | K-80 | 598800180 | K-80-S  | 9/32       | 7  | 100   | 1.000               | 1.500 | 3.313  | 3.625  | 1.125 | 0.125 | 0.313 | 0.406 | 0.344 | 0.625 | 1.3  | 4,300  |
| 598850081 | K-81 | 598800181 | K-81-S  | 3/8        | 10 | 100   | 1.281               | 2.031 | 4.781  | 4.813  | 1.625 | 0.156 | 0.438 | 0.563 | 0.469 | 0.875 | 3.1  | 8,800  |
| 598850082 | K-82 | 598800182 | K-82-S  | 1/2        | 13 | 100   | 1.688               | 2.438 | 6.125  | 6.125  | 2.000 | 0.188 | 0.563 | 0.750 | 0.656 | 1.125 | 6.5  | 15,000 |
| 598850083 | K-83 | 598800183 | K-83-S  | 5/8        | 16 | 100   | 1.938               | 2.875 | 6.813  | 7.219  | 2.438 | 0.250 | 0.688 | 0.938 | 0.813 | 1.500 | 10.7 | 22,600 |
| 598800084 | K-84 | 598800184 | K-84-S  | 3/4        | 20 | 80    | 2.375               | 3.250 | 8.531  | 8.188  | 2.688 | 0.313 | 0.813 | 1.219 | 1.000 | 1.750 | 15.2 | 28,300 |
| 598800085 | K-85 | ---       | ---     | 7/8        | 22 | 80    | 2.750               | 3.656 | 9.625  | 9.469  | 3.000 | 0.375 | 0.938 | 1.281 | 1.063 | 2.000 | 25.9 | 34,200 |
| 599800086 | K-86 | ---       | ---     | 1          | 26 | 63    | 3.000               | 4.063 | 10.063 | 10.063 | 3.375 | -     | 1.375 | 1.219 | 1.094 | 1.875 | 26.9 | 35,900 |

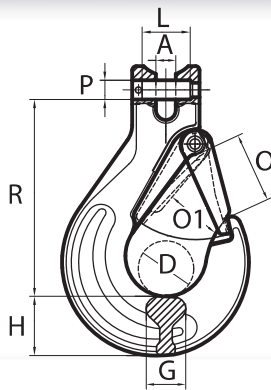

## Peer-Lift® Clevis Sling Hook w/Latch (Grade 80)

| Stock #  | Chain Size |       | Dimensions (Inches) |      |      |      |      |      |      |             | Lbs. Per Each | WLL (Lbs.) |
|----------|------------|-------|---------------------|------|------|------|------|------|------|-------------|---------------|------------|
|          | Inches     | MM    | A                   | D    | G    | H    | O    | O1   | R    | PxL         |               |            |
| 8418280* | 9/32-5/16  | 7-8   | 0.35                | 0.98 | 0.75 | 1.10 | 1.26 | 1.02 | 3.72 | 0.38 x 0.91 | 1.34          | 4,500      |
| 8418480* | 3/8        | 10    | 0.45                | 1.18 | 0.98 | 1.30 | 1.54 | 1.22 | 4.29 | 0.49 x 1.16 | 2.47          | 7,100      |
| 8418680* | 1/2        | 13    | 0.57                | 1.50 | 1.18 | 1.57 | 1.89 | 1.54 | 5.31 | 0.63 x 1.46 | 4.65          | 12,000     |
| 8418780* | 5/8        | 16    | 0.69                | 1.73 | 1.46 | 1.85 | 2.17 | 1.77 | 6.10 | 0.79 x 2.05 | 7.50          | 18,100     |
| 8418880  | 3/4        | 19-20 | 0.91                | 2.05 | 2.01 | 2.05 | 2.40 | 2.09 | 7.20 | 0.94 x 2.87 | 14.99         | 28,300     |
| 8418980  | 7/8        | 22    | 0.96                | 2.36 | 1.97 | 2.44 | 2.80 | 2.40 | 8.35 | 1.06 x 2.80 | 19.84         | 34,200     |

\*Replaces: 8518280 - 9/32", 8518480 - 3/8", 8518680 - 1/2", 8518780 - 5/8"



DO NOT EXCEED CAPACITY!  
See the CAUTIONS & WARNINGS section before using these products. Pages 134-145.


OVERHEAD LIFTING



V10™ Eye Shortening Grab Hook


No reduction in working load limit. Presence of a chain shape groove for optimal chain position.

| Stock # | Mfr. #   | Chain Size  |     | Dimensions (Inches) |       |       |       |       |        | Lbs. Per Each | Working Load Limit (Lbs.) |
|---------|----------|-------------|-----|---------------------|-------|-------|-------|-------|--------|---------------|---------------------------|
|         |          | Inches      | MM  | E                   | F     | H     | O     | O1    | R      |               |                           |
| 8427120 | GSE6     | 1/4         | 6   | 0.413               | 0.709 | 0.709 | 0.335 | 0.315 | 2.500  | 0.51          | 3,100                     |
| 8427220 | GSE7-8   | 9/32 - 5/16 | 7-8 | 0.531               | 0.945 | 0.965 | 0.374 | 0.354 | 3.268  | 1.15          | 5,700                     |
| 8427420 | GSE10    | 3/8         | 10  | 0.630               | 1.220 | 1.161 | 0.551 | 0.531 | 4.173  | 2.21          | 8,800                     |
| 8427620 | GSE13    | 1/2         | 13  | 0.787               | 1.496 | 1.535 | 0.650 | 0.610 | 5.197  | 4.63          | 15,000                    |
| 8427720 | GSE16    | 5/8         | 16  | 1.063               | 1.890 | 1.811 | 0.846 | 0.787 | 6.535  | 8.71          | 22,600                    |
| 8427820 | GSE19-20 | 3/4         | 20  | 1.299               | 2.362 | 2.264 | 1.063 | 0.984 | 8.150  | 16.76         | 35,300                    |
| 8427920 | GSE22    | 7/8         | 22  | 1.457               | 2.598 | 2.480 | 1.181 | 1.063 | 8.976  | 22.27         | 42,700                    |
| 8427020 | GSE26    | 1           | 26  | 1.732               | 3.071 | 2.933 | 1.398 | 1.280 | 10.630 | 37.26         | 59,700                    |

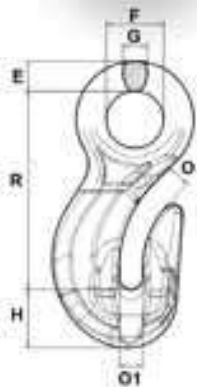


V10™ Eye Grab Hook w/ Clevis Attachment (Grade 100)

| Stock # | Mfr. # | Chain Size |     | Dimensions (Inches) |       |       |       |       |             | Lbs. Per Each | Working Load Limit (Lbs.) |
|---------|--------|------------|-----|---------------------|-------|-------|-------|-------|-------------|---------------|---------------------------|
|         |        | Inches     | MM  | A                   | C     | D     | E     | G     | PxL         |               |                           |
| 8420100 | GIE6   | 1/4        | 6   | 0.406               | 0.709 | 3.484 | 0.315 | 0.256 | 0.29 x 0.65 | 0.60          | 2,700                     |
| 8420200 | GIE7-8 | 9/32- 5/16 | 7-8 | 0.531               | 0.945 | 4.606 | 0.354 | 0.358 | 0.38 x 0.91 | 1.35          | 5,700                     |
| 8420400 | GIE10  | 3/8        | 10  | 0.630               | 1.220 | 5.827 | 0.531 | 0.453 | 0.49 x 1.16 | 2.69          | 8,800                     |
| 8420600 | GIE13  | 1/2        | 13  | 0.787               | 1.457 | 7.283 | 0.610 | 0.571 | 0.63 x 1.46 | 5.62          | 15,000                    |
| 8420700 | GIE16  | 5/8        | 16  | 1.043               | 1.890 | 9.134 | 0.787 | 0.689 | 0.79 x 2.05 | 10.80         | 22,600                    |

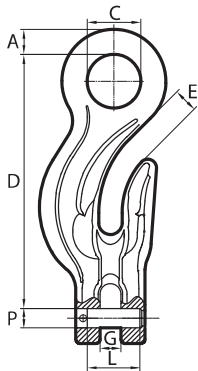

When using non-cradle or non-shortening grab hooks in a shortening or choker application, the Working Load Limit (WLL) of the sling must be reduced by 20%



Accoloy® Eye Grab Hook


| Stock #    | Chain Size |    |       | Dimensions (Inches) |       |       |       |        |       | Lbs. Per Each | WLL (Lbs.) |
|------------|------------|----|-------|---------------------|-------|-------|-------|--------|-------|---------------|------------|
| Red        | Inches     | MM | Grade | D                   | E     | F     | G     | H      | I     |               |            |
| 592252072  | 9/32       | 7  | 100   | 2.685               | 0.344 | 0.625 | 0.609 | 4.125  | 2.375 | 0.7           | 4,300      |
| 592252073  | 3/8        | 10 | 100   | 3.375               | 0.484 | 0.813 | 0.734 | 5.031  | 2.844 | 1.2           | 8,800      |
| 592252075  | 1/2        | 13 | 100   | 4.250               | 0.641 | 1.031 | 0.969 | 6.469  | 3.719 | 2.6           | 15,000     |
| 592252076  | 5/8        | 16 | 100   | 5.281               | 0.781 | 1.250 | 1.188 | 8.000  | 4.563 | 4.9           | 22,600     |
| 592202077  | 3/4        | 20 | 80    | 6.250               | 0.938 | 1.500 | 1.406 | 9.469  | 5.469 | 8.2           | 28,300     |
| 592202078  | 7/8        | 22 | 80    | 7.250               | 1.094 | 1.750 | 1.625 | 11.000 | 6.375 | 12.1          | 34,200     |
| 592202079* | 1          | 26 | 80    | 8.000               | 1.188 | 1.875 | 1.813 | 12.156 | 6.750 | 19.9          | 47,700     |
| 592202051* | 1-1/4      | 32 | 80    | 10.500              | 1.500 | 2.250 | 2.500 | 15.563 | 8.250 | 40.0          | 72,300     |

\*orange color, cradle grab style

Peer-Lift® Eye Cradle Grab Hook (Grade 80)

| Stock #  | Chain Size |     | Dimensions (Inches) |      |      |      |      |      | Lbs. Per Each | WLL (Lbs.) |
|----------|------------|-----|---------------------|------|------|------|------|------|---------------|------------|
| Black    | Inches     | MM  | E                   | F    | G    | H    | O    | R    |               |            |
| 8427280* | 9/32-5/16  | 7-8 | 0.39                | 0.61 | 1.18 | 0.94 | 0.39 | 2.36 | 0.66          | 4,500      |
| 8427480* | 3/8        | 10  | 0.47                | 0.81 | 1.73 | 1.26 | 0.51 | 3.15 | 1.32          | 7,100      |
| 8427680* | 1/2        | 13  | 0.63                | 0.98 | 2.09 | 1.50 | 0.67 | 4.09 | 2.87          | 12,000     |
| 8427780* | 5/8        | 16  | 0.79                | 1.22 | 2.52 | 1.77 | 0.79 | 4.49 | 4.85          | 18,100     |
| 8427880  | 3/4        | 20  | 0.94                | 1.42 | 3.35 | 2.09 | 0.91 | 5.31 | 8.82          | 28,300     |
| 8427980  | 7/8        | 22  | 0.98                | 1.61 | 3.82 | 2.44 | 1.06 | 6.22 | 12.79         | 34,200     |


\*Replaces: 8527280 - 9/32", 8527480 - 3/8", 8527680 - 1/2", 8527780 - 5/8"





# GRAB HOOKS

## V10™ Clevis Shortening Grab Hook (Grade 100)




| Stock # | Mfr. #   | Chain Size |     | Dimensions (Inches) |       |       |       |       |             | Lbs. Per Each | WLL (Lbs.) |
|---------|----------|------------|-----|---------------------|-------|-------|-------|-------|-------------|---------------|------------|
|         |          | Inches     | MM  | A                   | H     | O     | O1    | R     | PxL         |               |            |
| 8428100 | GSC6     | 1/4        | 6   | 0.276               | 0.689 | 0.276 | 0.295 | 2.008 | 0.29 x 0.65 | 0.55          | 3,100      |
| 8428200 | GSC7-8   | 9/32- 5/16 | 7-8 | 0.354               | 0.925 | 0.374 | 0.413 | 2.598 | 0.38 x 0.91 | 1.32          | 5,700      |
| 8428400 | GSC10    | 3/8        | 10  | 0.453               | 1.142 | 0.492 | 0.512 | 3.228 | 0.49 x 1.16 | 2.51          | 8,800      |
| 8428610 | GSC13    | 1/2        | 13  | 0.571               | 1.535 | 0.650 | 0.610 | 4.173 | 0.63 x 1.46 | 4.63          | 15,000     |
| 8428710 | GSC16    | 5/8        | 16  | 0.689               | 1.811 | 0.866 | 0.787 | 5.118 | 0.79 x 2.05 | 8.38          | 22,600     |
| 8428810 | GSC19-20 | 3/4        | 20  | 0.866               | 2.224 | 1.024 | 0.945 | 6.378 | 0.94 x 2.87 | 16.21         | 35,300     |
| 8428910 | GSC22    | 7/8        | 22  | 0.984               | 2.480 | 1.161 | 1.063 | 7.008 | 1.06 x 2.80 | 21.01         | 42,700     |



## V10™ Clevis Shortening Grab Hook w/Retainer (Grade 100)


8429620\*  
8429720\*



| Stock # | Mfr. #     | Type | Chain Size |     | Dimensions (Inches) |       |       |       |       |             | Lbs. Per Each | WLL (Lbs.) |
|---------|------------|------|------------|-----|---------------------|-------|-------|-------|-------|-------------|---------------|------------|
|         |            |      | Inches     | MM  | A                   | H     | O     | O1    | R     | PxL         |               |            |
| 8429100 | GSC6-S     | I    | 1/4        | 6   | 0.276               | 0.689 | 0.276 | 0.295 | 2.008 | 0.29 x 0.65 | 0.55          | 3,100      |
| 8429220 | GSC7-8-S   | I    | 9/32-5/16  | 7-8 | 0.354               | 0.961 | 0.366 | 0.335 | 2.598 | 0.38 x 0.91 | 1.32          | 5,700      |
| 8429400 | GSC10-S    | I    | 3/8        | 10  | 0.453               | 1.142 | 0.531 | 0.512 | 3.228 | 0.49 x 1.16 | 2.51          | 8,800      |
| 8429620 | GSC13-S    | II   | 1/2        | 13  | 0.571               | 1.535 | 0.650 | 0.610 | 4.173 | 0.63 x 1.45 | 4.63          | 15,000     |
| 8429720 | GSC16-S    | II   | 5/8        | 16  | 0.689               | 1.811 | 0.866 | 0.787 | 5.118 | 0.79 x 2.05 | 8.38          | 22,600     |
| 8429800 | GSC19-20-S | I    | 3/4        | 20  | 0.866               | 2.244 | 1.024 | 0.945 | 6.378 | 0.94 x 2.87 | 16.21         | 35,300     |
| 8429900 | GSC22-S    | I    | 7/8        | 22  | 0.984               | 2.480 | 1.161 | 1.063 | 7.008 | 1.06 x 2.80 | 21.01         | 42,700     |





## Kuplex® Clevis Type Grab Hook



| Stock #   | ID # | Chain Size |    |       | Dimensions (Inches) |       |       |       |       |       |       |       |       |       | Lbs. Per Each | WLL (Lbs.) |
|-----------|------|------------|----|-------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|---------------|------------|
|           |      | Inches     | MM | Grade | A                   | B     | C     | D     | E     | F     | G     | H     | I     | J     |               |            |
| 598750072 | K-72 | 9/32       | 7  | 100   | 0.688               | 1.250 | 2.125 | 2.125 | 0.375 | 0.125 | 0.313 | 0.406 | 0.344 | 0.625 | 0.6           | 4,300      |
| 598750073 | K-73 | 3/8        | 10 | 100   | 1.031               | 1.500 | 2.875 | 2.625 | 0.500 | 0.156 | 0.438 | 0.563 | 0.469 | 0.875 | 1.5           | 8,800      |
| 598750075 | K-75 | 1/2        | 13 | 100   | 1.250               | 2.000 | 3.563 | 3.344 | 0.625 | 0.188 | 0.563 | 0.750 | 0.656 | 1.125 | 3.4           | 15,000     |
| 598750076 | K-76 | 5/8        | 16 | 100   | 1.625               | 2.375 | 4.938 | 4.250 | 0.781 | 0.250 | 0.688 | 0.938 | 0.813 | 1.500 | 6.2           | 22,600     |
| 598700077 | K-77 | 3/4        | 20 | 80    | 1.875               | 2.938 | 5.094 | 5.063 | 0.875 | 0.313 | 0.813 | 1.219 | 1.000 | 1.750 | 10.1          | 28,300     |
| 598700078 | K-78 | 7/8        | 22 | 80    | 2.125               | 3.500 | 5.875 | 6.094 | 1.125 | 0.375 | 0.938 | 1.281 | 1.063 | 2.000 | 14.8          | 34,200     |

## Peer-Lift® Clevis Cradle Grab Hook (Grade 80)

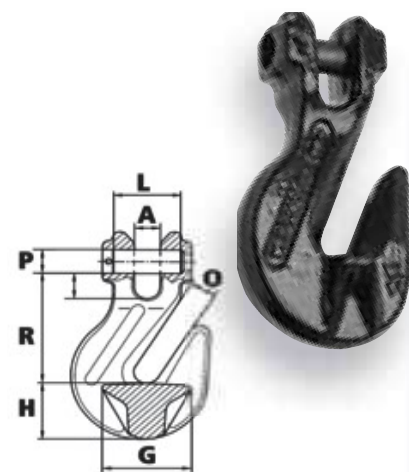

| Stock #  | Chain Size |     | Dimensions (Inches) |      |      |      |      |             | Lbs. Per Each | WLL (Lbs.) |
|----------|------------|-----|---------------------|------|------|------|------|-------------|---------------|------------|
|          | Inches     | MM  | A                   | G    | H    | O    | R    | PxL         |               |            |
| 8428280* | 9/32-5/16  | 7-8 | 0.35                | 1.18 | 0.95 | 0.39 | 1.97 | 0.35 x 0.91 | 0.66          | 4,500      |
| 8428480* | 3/8        | 10  | 0.51                | 1.73 | 1.22 | 0.51 | 2.83 | 0.51 x 1.24 | 1.65          | 7,100      |
| 8428680* | 1/2        | 13  | 0.67                | 2.09 | 1.50 | 0.67 | 3.46 | 0.63 x 1.65 | 3.09          | 12,000     |
| 8428780* | 5/8        | 16  | 0.83                | 2.52 | 1.73 | 0.79 | 4.02 | 0.83 x 2.03 | 5.51          | 18,100     |
| 8428880  | 3/4        | 20  | 0.94                | 3.35 | 2.09 | 0.94 | 4.61 | 0.95 x 2.42 | 9.48          | 28,300     |
| 8428980  | 7/8        | 22  | 1.02                | 3.82 | 2.44 | 1.06 | 5.47 | 1.02 x 2.83 | 14.11         | 34,200     |

*\*Replaces: 8528280 - 9/32", 8528480 - 3/8", 8528680 - 1/2", 8528780 - 5/8"*




DO NOT EXCEED CAPACITY!  
See the CAUTIONS & WARNINGS section before using these products. Pages 134-145.




Foundry Hooks

V10™ Eye Foundry Hook (Grade 100)

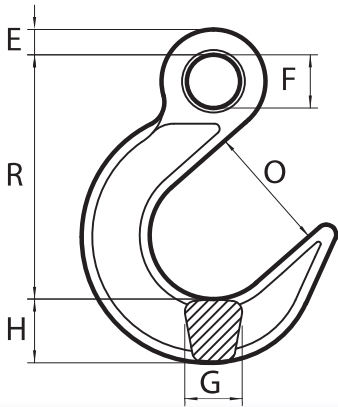


| Stock # | Mfr. #   | Chain Size |     | Dimensions (Inches) |       |       |       |       |       | Lbs. Per Each | WLL (Lbs.) |
|---------|----------|------------|-----|---------------------|-------|-------|-------|-------|-------|---------------|------------|
|         |          | Inches     | MM  | E                   | F     | G     | H     | O     | R     |               |            |
| 8477200 | FHE7-8   | 9/32- 5/16 | 7-8 | 0.531               | 0.709 | 1.024 | 1.220 | 2.520 | 4.823 | 2.49          | 5,700      |
| 8477400 | FHE10    | 3/8        | 10  | 0.630               | 0.866 | 1.260 | 1.417 | 3.071 | 5.866 | 4.39          | 8,800      |
| 8477600 | FHE13    | 1/2        | 13  | 0.748               | 1.063 | 1.535 | 1.693 | 3.504 | 6.949 | 7.30          | 15,000     |
| 8477700 | FHE16    | 5/8        | 16  | 0.945               | 1.260 | 1.772 | 1.969 | 3.937 | 8.071 | 11.69         | 22,600     |
| 8477800 | FHE19-20 | 3/4        | 20  | 1.063               | 1.496 | 2.008 | 2.402 | 4.528 | 9.331 | 16.98         | 35,300     |

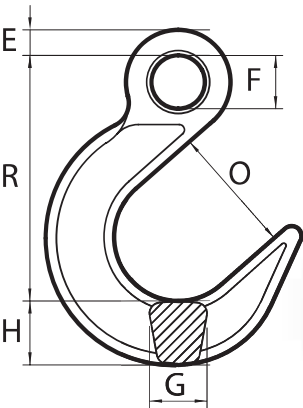

Peer-Lift® Eye Foundry Hook (Grade 80)

| Stock # | Chain Size |           | Dimensions (Inches) |      |      |      |      |      |      | Lbs. Per Each | WLL (Lbs.) |
|---------|------------|-----------|---------------------|------|------|------|------|------|------|---------------|------------|
|         | Black      | Inches    | MM                  | E    | F    | G    | H    | O    | R    |               |            |
| 8477280 |            | 9/32-5/16 | 7-8                 | 0.53 | 0.71 | 1.02 | 1.22 | 2.48 | 4.82 | 2.49          | 4,500      |
| 8477480 |            | 3/8       | 10                  | 0.63 | 0.87 | 1.26 | 1.42 | 3.03 | 5.87 | 4.41          | 7,100      |
| 8477680 |            | 1/2       | 13                  | 0.75 | 1.06 | 1.54 | 1.69 | 3.46 | 6.83 | 7.28          | 12,000     |
| 8477780 |            | 5/8       | 16                  | 0.95 | 1.26 | 1.77 | 1.97 | 3.94 | 8.07 | 11.68         | 18,100     |
| 8477880 |            | 3/4       | 20                  | 1.06 | 1.50 | 2.01 | 2.40 | 4.53 | 9.33 | 16.98         | 28,300     |

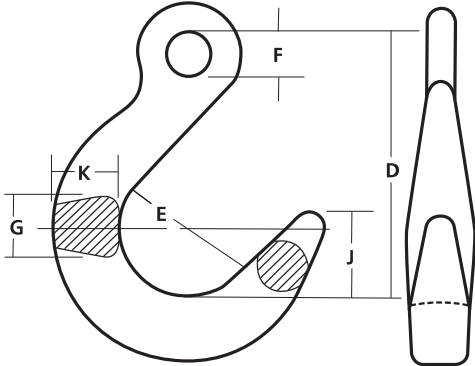

Accoloy® Eye Foundry Hook


| Stock #   | Chain Size |    |       | Dimensions (Inches) |       |       |       |       |       |      | Lbs. Per Each | WLL (Lbs.) |
|-----------|------------|----|-------|---------------------|-------|-------|-------|-------|-------|------|---------------|------------|
| Red       | Inches     | MM | Grade | D                   | E     | F     | G     | J     | K     |      |               |            |
| 592454498 | 9/32       | 7  | 100   | 4.750               | 2.625 | 0.625 | 1.000 | 1.563 | 1.125 | 2.0  | 4,300         |            |
| 592454499 | 3/8        | 10 | 100   | 5.750               | 3.125 | 0.813 | 1.250 | 1.875 | 1.375 | 4.1  | 8,800         |            |
| 592454500 | 1/2        | 13 | 100   | 6.875               | 3.750 | 1.031 | 1.500 | 2.250 | 1.625 | 7.0  | 15,000        |            |
| 592454501 | 5/8        | 16 | 100   | 8.063               | 4.250 | 1.250 | 1.750 | 2.625 | 1.875 | 10.5 | 22,600        |            |
| 592404502 | 3/4        | 20 | 80    | 9.250               | 4.750 | 1.500 | 2.000 | 3.000 | 2.125 | 18.2 | 28,300        |            |
| 592404503 | 7/8        | 22 | 80    | 10.375              | 5.250 | 1.750 | 2.250 | 3.375 | 2.375 | 26.0 | 34,200        |            |
| 592404504 | 1          | 26 | 80    | 11.563              | 5.750 | 2.000 | 2.500 | 2.750 | 2.750 | 35.0 | 47,700        |            |
| 592404505 | 1-1/4      | 32 | 80    | 12.750              | 6.375 | 2.250 | 3.000 | 4.250 | 3.250 | 50.0 | 72,300        |            |






# FOUNDRY HOOKS

## Kuplex® Clevis Foundry Hook

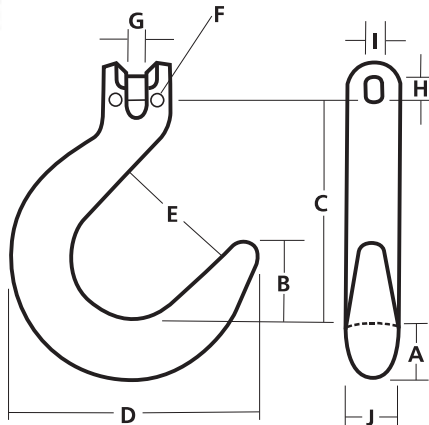


| Stock #   |       | Chain Size |    |       | Dimensions (Inches) |       |       |        |       |       |       |       |       |       | Lbs. Per Each | WLL (Lbs.) |
|-----------|-------|------------|----|-------|---------------------|-------|-------|--------|-------|-------|-------|-------|-------|-------|---------------|------------|
|           |       | Inches     | MM | Grade | A                   | B     | C     | D      | E     | F     | G     | H     | I     | J     |               |            |
| 598250498 | K-498 | 9/32       | 7  | 100   | 1.125               | 1.563 | 4.438 | 4.875  | 2.625 | 0.125 | 0.313 | 0.406 | 0.344 | 0.875 | 2.1           | 4,300      |
| 598250499 | K-499 | 3/8        | 10 | 100   | 1.375               | 1.875 | 5.500 | 5.875  | 3.000 | 0.156 | 0.438 | 0.563 | 0.469 | 1.125 | 4.3           | 8,800      |
| 598250500 | K-500 | 1/2        | 13 | 100   | 1.500               | 2.250 | 6.625 | 6.875  | 3.875 | 0.188 | 0.563 | 0.750 | 0.656 | 1.500 | 8.2           | 15,000     |
| 598250501 | K-501 | 5/8        | 16 | 100   | 2.188               | 2.563 | 7.625 | 8.281  | 4.125 | 0.250 | 0.688 | 0.938 | 0.813 | 1.750 | 14.4          | 22,600     |
| 598200502 | K-502 | 3/4        | 20 | 80    | 2.750               | 3.000 | 8.813 | 9.625  | 4.813 | 0.313 | 0.813 | 1.219 | 1.000 | 2.000 | 24.5          | 28,300     |
| 598200503 | K-503 | 7/8        | 22 | 80    | 3.000               | 3.375 | 9.938 | 10.688 | 5.375 | 0.375 | 0.938 | 1.281 | 1.063 | 2.250 | 33.1          | 34,200     |

## Self-Locking Hooks

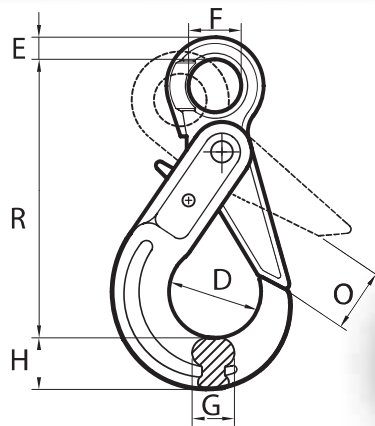

### V10™ Eye Self-Locking Hook (Grade 100)

| Stock # | Mfr. #   | Chain Size |       | Dimensions (Inches) |       |       |       |       |       |        | Lbs. Per Each | WLL (Lbs.) |
|---------|----------|------------|-------|---------------------|-------|-------|-------|-------|-------|--------|---------------|------------|
|         |          | In         | MM    | D                   | E     | F     | G     | H     | O     | R      |               |            |
| 8497100 | SKE6     | 1/4        | 6     | 1.378               | 0.433 | 0.827 | 0.630 | 0.807 | 1.102 | 4.331  | 1.17          | 3,100      |
| 8497200 | SKE7-8   | 9/32- 5/16 | 7-8   | 1.713               | 0.472 | 1.063 | 0.787 | 1.024 | 1.339 | 5.354  | 1.96          | 5,700      |
| 8497400 | SKE10    | 3/8        | 10    | 2.205               | 0.591 | 1.358 | 0.965 | 1.181 | 1.772 | 6.634  | 3.48          | 8,800      |
| 8497600 | SKE13    | 1/2        | 13    | 2.717               | 0.787 | 1.575 | 1.358 | 1.575 | 2.028 | 8.071  | 6.97          | 15,000     |
| 8497700 | SKE16    | 5/8        | 16    | 3.150               | 1.063 | 1.969 | 1.398 | 1.969 | 2.362 | 9.902  | 13.34         | 22,600     |
| 8497800 | SKE19-20 | 3/4        | 19-20 | 3.980               | 1.180 | 2.360 | 1.810 | 2.400 | 3.030 | 12.050 | 24.26         | 35,300     |
| 8497900 | SKE22    | 7/8        | 22    | 4.330               | 1.260 | 2.760 | 2.010 | 2.640 | 3.310 | 13.390 | 33.08         | 42,700     |

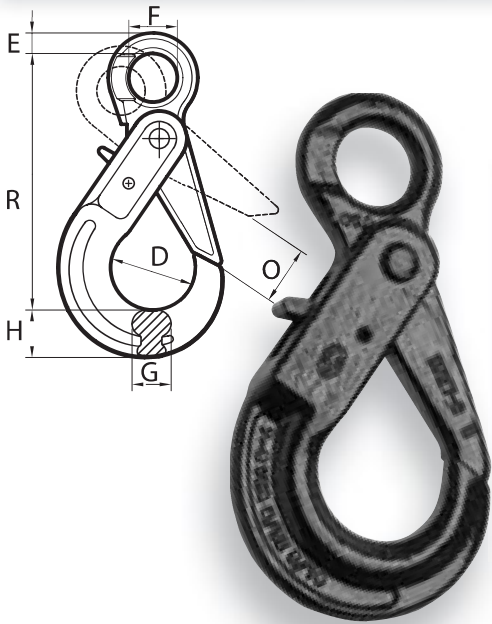

### Peer-Lift® Eye Self-Locking Hook (Grade 80)

| Stock #  | Chain Size |     | Dimensions (Inches) |      |      |      |      |         |      | Lbs. Per Each | WLL (Lbs.) |
|----------|------------|-----|---------------------|------|------|------|------|---------|------|---------------|------------|
|          | Inches     | MM  | D                   | E    | F    | G    | H    | O (min) | R    |               |            |
| 8497280* | 9/32-5/16  | 7-8 | 1.71                | 0.47 | 1.06 | 0.79 | 1.02 | 1.34    | 5.35 | 1.96          | 4,500      |
| 8497480* | 3/8        | 10  | 2.20                | 0.59 | 1.36 | 0.96 | 1.18 | 1.77    | 6.63 | 3.48          | 7,100      |
| 8497680* | 1/2        | 13  | 2.72                | 0.79 | 1.57 | 1.36 | 1.57 | 2.03    | 8.07 | 6.97          | 12,000     |
| 8497780* | 5/8        | 16  | 3.15                | 1.06 | 1.97 | 1.40 | 1.97 | 2.36    | 9.90 | 13.34         | 18,100     |


*\*Replaces: 8597280 - 9/32", 8597480 - 3/8", 8597680 - 1/2", 8597780 - 5/8"*



**DO NOT EXCEED CAPACITY!**  
See the CAUTIONS & WARNINGS section before using these products. Pages 134-145.




Self-Locking Hooks cont.

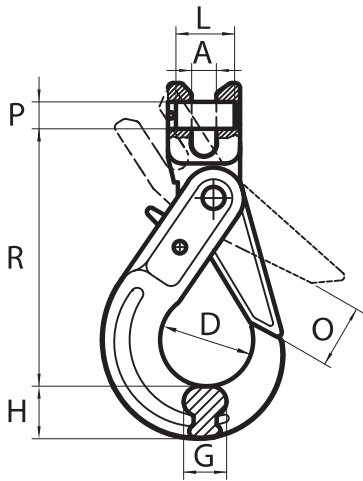

V10™ Clevis Self-Locking Hook (Grade 100)

| Stock # | Mfr. #   | Chain Size |       | Dimensions (Inches) |       |       |       |       |        |             | Lbs. Per Each | WLL (Lbs.) |
|---------|----------|------------|-------|---------------------|-------|-------|-------|-------|--------|-------------|---------------|------------|
|         |          | Inches     | MM    | A                   | D     | G     | H     | O     | R      | PxL         |               |            |
| 8498100 | SKC6     | 1/4        | 6     | 0.264               | 1.378 | 0.630 | 0.807 | 1.102 | 3.700  | 0.29 x 0.65 | 1.10          | 3,100      |
| 8498200 | SKC7-8   | 9/32- 5/16 | 7-8   | 0.335               | 1.713 | 0.787 | 1.024 | 1.339 | 4.843  | 0.38 x 0.91 | 2.12          | 5,700      |
| 8498400 | SKC10    | 3/8        | 10    | 0.472               | 2.205 | 0.965 | 1.181 | 1.772 | 5.650  | 0.49 x 1.16 | 3.53          | 8,800      |
| 8498600 | SKC13    | 1/2        | 13    | 0.591               | 2.717 | 1.358 | 1.575 | 2.028 | 7.067  | 0.63 x 1.46 | 6.90          | 15,000     |
| 8498800 | SKC16    | 5/8        | 16    | 0.748               | 3.150 | 1.398 | 1.969 | 2.362 | 8.543  | 0.79 x 2.05 | 12.79         | 22,600     |
| 8498000 | SKC19-20 | 3/4        | 19-20 | 0.870               | 3.980 | 1.810 | 2.400 | 3.030 | 10.710 | 0.94 x 2.87 | 25.14         | 35,300     |
| 8498900 | SKC22    | 7/8        | 22    | 0.980               | 4.330 | 2.010 | 2.640 | 3.310 | 11.810 | 1.06 x 2.80 | 33.52         | 42,700     |

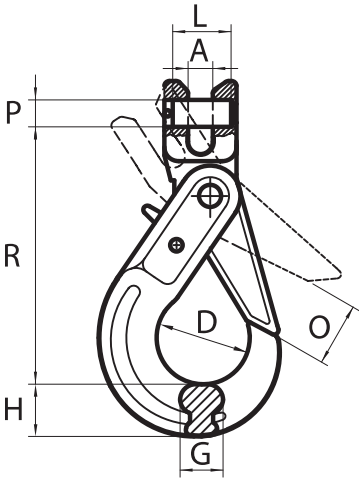

Peer-Lift® Clevis Self-Locking Hook (Grade 80)

| Stock #  | Chain Size |     | Dimensions (Inches) |      |      |      |         |      |             | Lbs. Per Each | WLL (Lbs.) |
|----------|------------|-----|---------------------|------|------|------|---------|------|-------------|---------------|------------|
|          | Inches     | MM  | A                   | D    | G    | H    | O (min) | R    | PxL         |               |            |
| 8498280* | 9/32-5/16  | 7-8 | 0.33                | 1.71 | 0.79 | 1.02 | 1.34    | 4.84 | 0.38 x 0.91 | 2.12          | 4,500      |
| 8498480* | 3/8        | 10  | 0.47                | 2.20 | 0.97 | 1.18 | 1.77    | 5.65 | 0.49 x 1.16 | 3.53          | 7,100      |
| 8498680* | 1/2        | 13  | 0.59                | 2.72 | 1.36 | 1.57 | 2.03    | 7.07 | 0.63 x 1.46 | 6.90          | 12,000     |
| 8498780* | 5/8        | 16  | 0.75                | 3.15 | 1.40 | 1.97 | 2.36    | 8.54 | 0.79 x 2.05 | 12.79         | 18,100     |

*\*Replaces: 8598280 - 9/32", 8598480 - 3/8", 8598680 - 1/2", 8598880 - 5/8"*






# SELF-LOCKING HOOKS

## V10™ Swivel Self-Locking Hook (Grade 100)

For positioning only when the hook is not under load.


| Stock # | Mfr. #   | Chain Size |       | Dimensions (Inches) |       |       |       |       |       |        | Lbs. Per Each | WLL (Lbs.) |
|---------|----------|------------|-------|---------------------|-------|-------|-------|-------|-------|--------|---------------|------------|
|         |          | Inches     | MM    | D                   | E     | F     | G     | H     | O     | R      |               |            |
| 8499100 | SKS6     | 1/4        | 6     | 1.377               | 0.512 | 1.377 | 0.630 | 0.807 | 1.102 | 6.299  | 1.76          | 3,100      |
| 8499200 | SKS7-8   | 9/32- 5/16 | 7-8   | 1.713               | 0.512 | 1.378 | 0.787 | 1.024 | 1.339 | 7.126  | 2.43          | 5,700      |
| 8499400 | SKS10    | 3/8        | 10    | 2.205               | 0.630 | 1.654 | 0.965 | 1.181 | 1.772 | 8.583  | 4.41          | 8,800      |
| 8499600 | SKS13    | 1/2        | 13    | 2.717               | 0.787 | 1.929 | 1.358 | 1.575 | 2.028 | 10.591 | 8.82          | 15,000     |
| 8499700 | SKS16    | 5/8        | 16    | 3.150               | 0.945 | 2.362 | 1.398 | 1.969 | 2.362 | 12.559 | 14.99         | 22,600     |
| 8499800 | SKS19-20 | 3/4        | 19-20 | 3.980               | 1.260 | 3.070 | 1.810 | 2.400 | 3.030 | 16.020 | 33.52         | 35,300     |
| 8499900 | SKS22    | 7/8        | 22    | 4.330               | 1.380 | 3.390 | 2.008 | 2.638 | 3.307 | 17.638 | 46.08         | 42,700     |

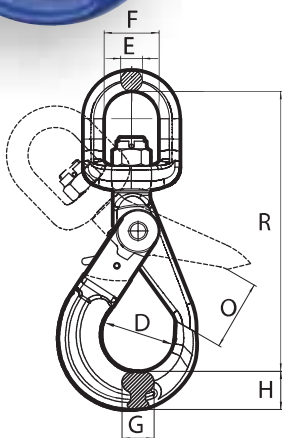

## V10™ Swivel Self-Locking Hook w/ Bearing (Grade 100)

Bearing allows the hook to rotate under a load.

| Stock # | Mfr. #   | Chain Size |       | Dimensions (Inches) |       |       |       |       |         |        | Lbs. Per Each | WLL (Lbs.) |
|---------|----------|------------|-------|---------------------|-------|-------|-------|-------|---------|--------|---------------|------------|
|         |          | Inches     | MM    | D                   | E     | F     | G     | H     | O (min) | R      |               |            |
| 8491100 | SKB6     | 1/4        | 6     | 1.377               | 0.512 | 1.377 | 0.630 | 0.807 | 1.102   | 6.299  | 1.76          | 3,100      |
| 8491200 | SKB7-8   | 9/32- 5/16 | 7-8   | 1.713               | 0.512 | 1.378 | 0.787 | 1.024 | 1.339   | 7.126  | 2.43          | 5,700      |
| 8491400 | SKB10    | 3/8        | 10    | 2.205               | 0.630 | 1.654 | 0.965 | 1.181 | 1.772   | 8.583  | 4.41          | 8,800      |
| 8491600 | SKB13    | 1/2        | 13    | 2.717               | 0.787 | 1.929 | 1.358 | 1.575 | 2.028   | 10.591 | 8.82          | 15,000     |
| 8491700 | SKB16    | 5/8        | 16    | 3.150               | 0.945 | 2.362 | 1.398 | 1.969 | 2.362   | 12.559 | 16.09         | 22,600     |
| 8491800 | SKB19-20 | 3/4        | 19-20 | 3.980               | 1.260 | 3.070 | 1.810 | 2.400 | 3.030   | 16.020 | 33.52         | 35,300     |
| 8491900 | SKB22    | 22         | 22    | 4.330               | 1.380 | 3.390 | 2.008 | 2.638 | 3.307   | 17.638 | 46.08         | 42,700     |

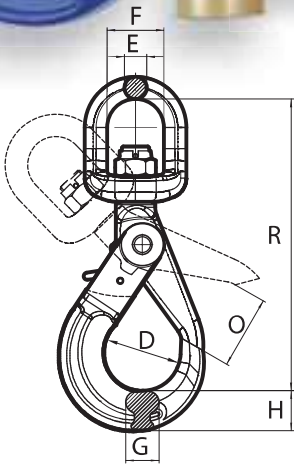


## Peer-Lift® Swivel Self-Locking Hook (Grade 80)

For positioning only and infrequent rotation under load.

| Stock #  | Chain Size |    | Dimensions (Inches) |      |      |      |      |         |       | Lbs. Per Each | WLL (Lbs.) |
|----------|------------|----|---------------------|------|------|------|------|---------|-------|---------------|------------|
|          | Inches     | MM | D                   | E    | F    | G    | H    | O (min) | R     |               |            |
| 8499280* | 9/32       | 7  | 1.71                | 0.51 | 1.38 | 0.79 | 1.02 | 1.34    | 7.13  | 2.43          | 4,500      |
| 8499480* | 3/8        | 10 | 2.20                | 0.63 | 1.65 | 0.97 | 1.18 | 1.77    | 8.58  | 4.41          | 7,100      |
| 8499680* | 1/2        | 13 | 2.72                | 0.79 | 1.93 | 1.36 | 1.57 | 2.03    | 10.59 | 8.82          | 12,000     |
| 8499780* | 5/8        | 16 | 3.15                | 0.94 | 2.36 | 1.40 | 1.97 | 2.36    | 12.64 | 16.09         | 18,100     |

\*Replaces: 8599280 - 9/32", 8599480 - 3/8", 8599680 - 1/2", 8599780 - 5/8"

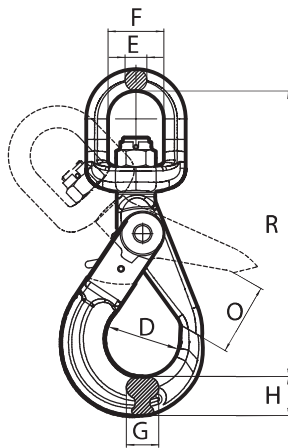

DO NOT EXCEED CAPACITY!  
See the CAUTIONS & WARNINGS section before using these products. Pages 134-145.



Replacement Parts for V10™ & Peer-Lift® Components



V10™ & Peer-Lift® Clevis Hook Pin Kits

| Stock # | Dia. x Length (inches) | Use with V10 Stock #                        | Use with Peer-Lift Stock # |
|---------|------------------------|---------------------------------------------|----------------------------|
| 8410199 | 0.291x0.650            | 8418100, 8428100, 8498100                   | ---                        |
| 8410299 | .378x.906              | 8420200, 8429200, 8498200, 8918200, 8928200 | 8418280, 8498280           |
| 8410499 | .492x1.161             | 8420400, 8429400, 8918400, 8928400, 8998400 | 8418480, 8498480           |
| 8410599 | .630x1.457             | 8420600, 8428610, 8429620, 8918600, 8998600 | 8418680, 8498680           |
| 8410699 | .787x2.047             | 8418700, 8420700, 8428710, 8429720, 8998800 | 8418780, 8498780           |
| 8410799 | .945x2.874             | 8428810, 8918800                            | 8418880                    |
| 8410899 | 1.063x2.795            | 8428910, 8918900                            | 8418980                    |
| 8428262 | .35x.91                | ---                                         | 8428280                    |
| 8428462 | .51x1.24               | ---                                         | 8428480                    |
| 8428662 | .63x1.65               | ---                                         | 8428680                    |
| 8428762 | .83x2.03               | ---                                         | 8428780                    |
| 8428862 | .94x2.42               | ---                                         | 8428880                    |
| 8428962 | 1.02x2.83              | ---                                         | 8428980                    |



V10™ & Peer-Lift® Sling Hook Latch Kits

| Stock # | Use with V10 Stock # | Use with Peer-Lift Stock # |
|---------|----------------------|----------------------------|
| 8410077 | 8417100, 8418100     | ---                        |
| 8410177 | 8417200, 8418200     | 8417280, 8418280           |
| 8410277 | 8417400, 8418400     | 8417480, 8418480           |
| 8410377 | 8417600, 8418600     | 8417680, 8418680           |
| 8410477 | 8417700, 8418700     | 8417780, 8418780           |
| 8410577 | 8417800, 8418800     | 8417880, 8418880           |
| 8410677 | 8417900, 8418900     | 8417980, 8418980           |

TYPE 1



TYPE 2

V10™ Replacement Pin Kits for Retainer Pin Grab Hooks

| Stock #   | Use with V10 Stock # | Type |
|-----------|----------------------|------|
| 8429105   | 8429100              | 1    |
| 8429205   | 8429200              | 1    |
| *8429225  | 8429220              | 1    |
| 8429405   | 8429400              | 1    |
| **8429425 | 8429400              | 1    |
| 8429625   | 8429620              | 2    |
| 8429725   | 8429720              | 2    |
| 8429805   | 8429800              | 1    |
| 8429905   | 8429900              | 1    |

\*8429225 SUPERSEDES 8429205, \*\*8429425 SUPERSEDES 8429405

V10™ & Peer-Lift® Self-Locking Hooks Trigger Kits



| Stock # | Use with V10 Stock #               | Use with Peer-Lift Stock # |
|---------|------------------------------------|----------------------------|
| 8490199 | 8491100, 8498100, 8497100, 8499100 | ---                        |
| 8490299 | 8491200, 8498200, 8497200, 8499200 | 8497280, 8498280, 8499280  |
| 8490399 | 8491400, 8498400, 8497400, 8499400 | 8497480, 8498480, 8499480  |
| 8490499 | 8491600, 8498600, 8497600, 8499600 | 8497680, 8498680, 8499680  |
| 8490599 | 8491700, 8498800, 8497700, 8499700 | 8497780, 8498780, 8499780  |

V10™ & Peer-Lift® Spare Pin & Collar Set Coupling Links



| Stock # | Dia. x Length (inches) | Use W/V10 Stock # | Use W/Peer-Lift Stock # |
|---------|------------------------|-------------------|-------------------------|
| 8452999 | .19x1.54               | 8452900           | ---                     |
| 8453199 | .24x1.83               | 8453100           | 8453280                 |
| 8453099 | .25x2.09               | 8453000           | 8453180                 |
| 8453299 | .32x2.49               | 8953210           | 8453380                 |
| 8453399 | .39x3.11               | 8453300           | 8453480                 |
| 8453499 | .55x4.17               | 8453400           | 8453580                 |
| 8453589 | .63x4.82               | 8453510           | 8453680                 |
| 8453699 | .63x5.65               | 8453610           | 8453780                 |
| 8453789 | .71x6.26               | ---               | 8053755                 |
| 8453799 | .75x6.50               | 8453700           | ---                     |
| 8453899 | .98x7.68               | ---               | 8053855                 |





# REPLACEMENT PARTS

## Replacement Parts for Accoloy® Kuplex® Components

### Kuplex® Load Pins & Retaining Pins

All Kuplex components derive their integrity connection from the special Kuplex Load Pins and Spiral Pins. The load pins are made from alloy steel heat treated to obtain optimum rated performance properties. The load pins are specially shaped to develop strength characteristics and resistance to bending under rated load. The oval shape presents a greater force area than conventional round pins.




| Use with Accessories for this Chain Size (Inches) | Hooks & Kuplinks        |            |            |            | Kuplers                |            | Retaining Pin |               |
|---------------------------------------------------|-------------------------|------------|------------|------------|------------------------|------------|---------------|---------------|
|                                                   | Stock No. Load Pin Set* | H (Inches) | I (Inches) | K (Inches) | Stock No. Load Pin Set | K (Inches) | Stock No.     | Qty. Per Ctn. |
| 9/32                                              | 598950232               | 0.406      | 0.313      | 1.156      | 598950132              | 1.531      | 598900332     | 100           |
| 3/8                                               | 598950233               | 0.563      | 0.469      | 1.656      | 598950133              | 2.094      | 598900333     | 50            |
| 1/2                                               | 598950234               | 0.719      | 0.625      | 2.219      | 598950134              | 2.719      | 598900334     | 50            |
| 5/8                                               | 598950235               | 0.922      | 0.781      | 2.563      | 598950135              | 3.219      | 598900335     | 25            |
| 3/4                                               | 598900236               | 1.188      | 1.000      | 3.125      | 598900136              | 3.938      | 598900336     | 10            |
| 7/8                                               | 598900237               | 1.250      | 1.063      | 3.563      | 598900137              | 4.531      | ---           | ---           |

**Important:** Use only genuine Kuplex load and retaining pins when assembling slings. Never use rods, bolts or other objects of questionable strength and metallurgy. Failure could cause serious injury or damage to property.

\* One Load Pin and two Spiral Pins are bagged.


There is an occasional need for replacement of Spiral Pins and Load Pins. The same Load Pins cannot be used in both Kuplers and Hooks. When ordering these parts separately, be sure to specify whether they are for Kuplers or Hooks and also specify Kupler Number or the Hook Number with which they are to be used.



### Accoloy® Kuplex® Latch Assembly

For use w/both Accoloy Eye Type & Kuplex Clevis Type Sling Hooks. One per bag.

| Use with Accessories for this Chain Size (Inches) | Latch Assembly Stock # | For Hook:               |                           | E (Inches) |
|---------------------------------------------------|------------------------|-------------------------|---------------------------|------------|
|                                                   |                        | Accoloy® Eye Sling Hook | Kuplex® Clevis Sling Hook |            |
| 9/32                                              | 599900402              | 592353080               | 598850080                 | 1.000      |
| 3/8                                               | 599900403              | 592353081               | 598850081                 | 1.375      |
| 1/2                                               | 599900404              | 592353082               | 598850082                 | 1.625      |
| 5/8                                               | 599900405              | 592353083               | 598850083                 | 2.125      |
| 3/4                                               | 599900406              | 592303084               | 598800084                 | 2.438      |
| 7/8                                               | 599900407              | 592303085               | 598800085                 | 2.625      |
| 1                                                 | 599900408              | 592303086               | 599800086                 | 3.250      |
| 1-1/4                                             | 599900410              | 592303088               | ---                       | 3.750      |

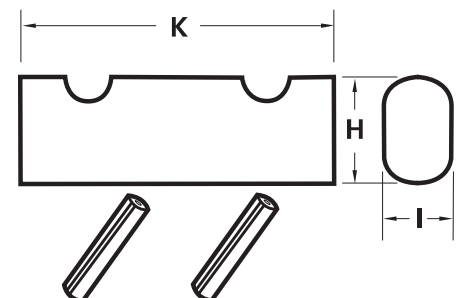

### Kuplex® Kuplok® Replacement Pins & Collars

Five pins and 5 collars per bag

| Chain Size (Inches) | Stock#    |           |
|---------------------|-----------|-----------|
|                     | Pin       | Collar    |
| 9/32                | 594300403 | 594300404 |
| 3/8                 | 594300603 | 594300604 |
| 1/2                 | 594300803 | 594300804 |
| 5/8                 | 594301003 | 594301004 |
| 3/4                 | 594301203 | 594301204 |




**DO NOT EXCEED CAPACITY!**  
See the CAUTIONS & WARNINGS section before using these products. Pages 134-145.

# Standard Alloy Components

## S-Hooks

Alloy components are 8620 alloy steel. S-hooks are heat-treated, proof tested and tumble finished.

| Stock # | Trade Size<br>(Inches) | Dimensions (Inches) |        |       |       | Lbs. Per Each | Working Load Limit<br>(Lbs.) |
|---------|------------------------|---------------------|--------|-------|-------|---------------|------------------------------|
|         |                        | A                   | B      | C     | D     |               |                              |
| SHA0312 | 5/16                   | 0.310               | 2.750  | 0.750 | 0.380 | 0.25          | 325                          |
| SHA0375 | 3/8                    | 0.380               | 4.130  | 1.130 | 0.560 | 0.26          | 425                          |
| SHA0500 | 1/2                    | 0.500               | 5.500  | 1.500 | 0.750 | 1.00          | 775                          |
| SHA0625 | 5/8                    | 0.630               | 7.000  | 1.880 | 0.940 | 1.40          | 1,225                        |
| SHA0750 | 3/4                    | 0.750               | 8.250  | 2.250 | 1.130 | 2.30          | 1,750                        |
| SHA0875 | 7/8                    | 0.880               | 9.500  | 2.630 | 1.310 | 3.00          | 2,400                        |
| SHA1000 | 1                      | 1.000               | 11.000 | 3.000 | 1.500 | 5.50          | 3,000                        |
| SHA1250 | 1-1/4                  | 1.250               | 13.750 | 3.750 | 1.880 | 9.90          | 4,900                        |
| SHA1500 | 1-1/2                  | 1.500               | 16.500 | 4.500 | 2.250 | 16.60         | 7,000                        |
| SHA1750 | 1-3/4                  | 1.750               | 19.250 | 5.250 | 2.630 | 26.50         | 9,600                        |
| SHA2000 | 2                      | 2.000               | 22.000 | 6.000 | 3.000 | 39.00         | 12,500                       |

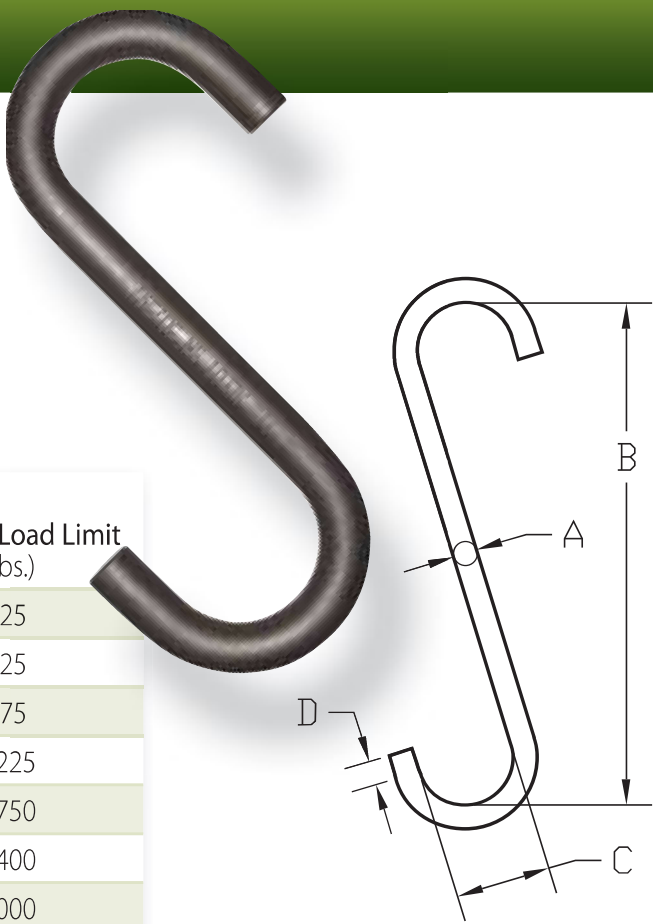


## J-Hooks

Latches available upon request.  
Alloy components are 8620 alloy steel.

| Stock # (Self-Colored) |         |         | Trade Size<br>(Inches) | Dimensions (Inches) |        |       |       |       | Lbs. Per Each | WLL<br>(Lbs.) |
|------------------------|---------|---------|------------------------|---------------------|--------|-------|-------|-------|---------------|---------------|
| Style A                | Style B | Style C |                        | A                   | B      | C     | D     | E     |               |               |
| JAA031                 | JBA031  | JCA031  | 5/16                   | 0.310               | 5.000  | 0.750 | 1.250 | 0.250 | 0.40          | 250           |
| JAA038                 | JBA038  | JCA038  | 3/8                    | 0.380               | 6.000  | 0.750 | 1.500 | 0.380 | 0.42          | 350           |
| JAA050                 | JBA050  | JCA050  | 1/2                    | 0.500               | 8.000  | 0.750 | 2.000 | 0.500 | 1.17          | 650           |
| JAA063                 | JBA063  | JCA063  | 5/8                    | 0.630               | 9.000  | 1.000 | 2.500 | 0.630 | 1.50          | 850           |
| JAA075                 | JBA075  | JCA075  | 3/4                    | 0.750               | 10.000 | 1.000 | 3.000 | 0.750 | 2.31          | 1,200         |
| JAA088                 | JBA088  | JCA088  | 7/8                    | 0.880               | 12.000 | 1.000 | 3.500 | 0.880 | 5.00          | 1,500         |
| JAA100                 | JBA100  | JCA100  | 1                      | 1.000               | 14.000 | 1.250 | 4.000 | 1.000 | 5.77          | 2,000         |
| JAA113                 | JBA113  | JCA113  | 1-1/8                  | 1.130               | 15.000 | 1.250 | 4.500 | 1.120 | 7.90          | 2,250         |
| JAA125                 | JBA125  | JCA125  | 1-1/4                  | 1.250               | 16.000 | 1.500 | 5.000 | 1.250 | 11.50         | 2,750         |
| ---                    | JBA138  | JCA138  | 1-3/8                  | 1.380               | 17.000 | 1.500 | 5.500 | 1.380 | 14.20         | 3,000         |
| JAA175                 | ---     | ---     | 1-3/4                  | 1.750               | 20.000 | 2.500 | 7.000 | 1.750 | 27.50         | 4,000         |

*\*Working Load Limit is based on bearing point to bearing point pull.*

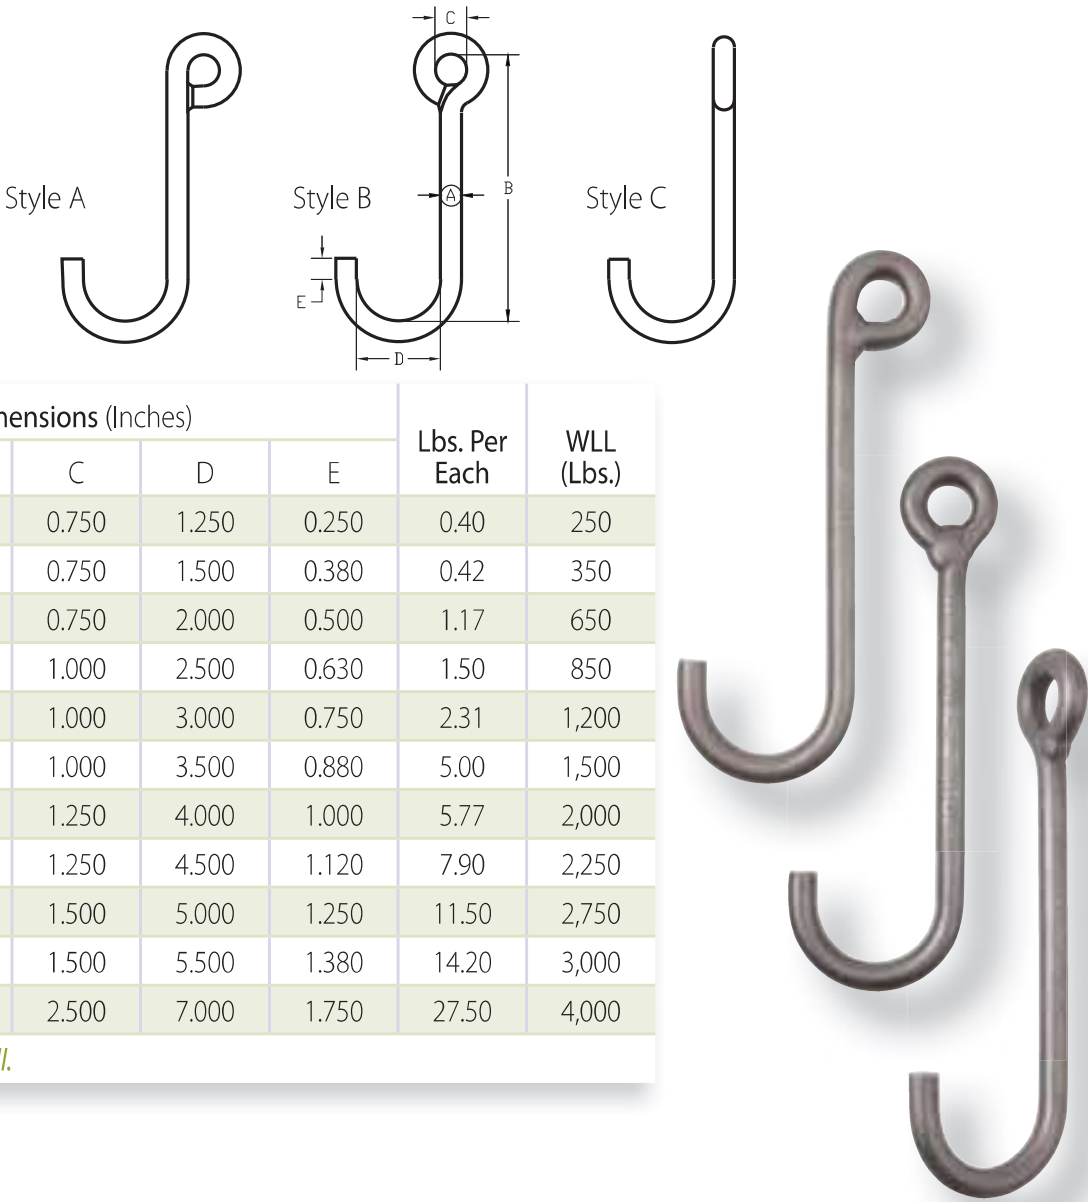



# STANDARD ALLOY COMPONENTS

## Foundry Sorting Hooks



Alloy components are 8620 alloy steel.






| Stock # | Self-Colored | Chain Size (Inches) | Dimensions (Inches) |       |       |       |       | Lbs. Per Each | Working Load Limit (Lbs.) |
|---------|--------------|---------------------|---------------------|-------|-------|-------|-------|---------------|---------------------------|
|         |              |                     | A                   | B     | C     | D     | E     |               |                           |
| FSA050  |              | 9/32                | 0.500               | 6.000 | 0.750 | 2.500 | 0.750 | 0.75          | 500                       |
| FSA063  |              | 9/32                | 0.630               | 8.500 | 0.750 | 3.500 | 1.500 | 1.40          | 800                       |
| FSA075  |              | 9/32                | 0.750               | 8.500 | 0.750 | 3.500 | 1.500 | 2.00          | 1,300                     |
| FSA081  |              | 3/8                 | 0.810               | 8.500 | 0.880 | 3.500 | 1.500 | 2.67          | 1,600                     |
| FSA100  |              | 3/8                 | 1.000               | 8.500 | 1.000 | 4.000 | 1.750 | 3.70          | 2,500                     |
| FSA113  |              | 3/8                 | 1.130               | 8.500 | 1.000 | 4.000 | 2.000 | 5.00          | 3,500                     |
| FSA125  |              | 1/2                 | 1.250               | 8.500 | 1.250 | 4.000 | 2.000 | 7.00          | 4,500                     |
| FSA150  |              | 1/2                 | 1.500               | 8.500 | 1.250 | 5.000 | 1.500 | 9.50          | 6,000                     |

## Foundry Sorting Hooks - Short Version



Alloy components are 8620 alloy steel.

| Stock # | Self-Colored | Chain Size (Inches) | Dimensions (Inches) |       |       |       |       | Lbs. Per Each | Working Load Limit (Lbs.) |
|---------|--------------|---------------------|---------------------|-------|-------|-------|-------|---------------|---------------------------|
|         |              |                     | A                   | B     | C     | D     | E     |               |                           |
| FSA050S |              | 9/32                | 0.500               | 6.000 | 0.750 | 3.000 | 1.500 | 1.33          | 450                       |
| FSA063S |              | 9/32                | 0.630               | 6.000 | 0.750 | 3.000 | 1.500 | 2.00          | 900                       |
| FSA075S |              | 9/32                | 0.750               | 6.000 | 0.750 | 3.000 | 1.500 | 2.30          | 1,400                     |
| FSA088S |              | 3/8                 | 0.880               | 6.000 | 0.880 | 3.000 | 1.500 | 2.88          | 2,000                     |
| FSA100S |              | 3/8                 | 1.000               | 6.000 | 1.000 | 3.000 | 1.500 | 3.80          | 3,000                     |
| FSA113S |              | 3/8                 | 1.130               | 6.000 | 1.000 | 3.000 | 1.500 | 4.70          | 4,000                     |
| FSA125S |              | 1/2                 | 1.250               | 6.000 | 1.250 | 3.000 | 1.500 | 6.30          | 5,500                     |

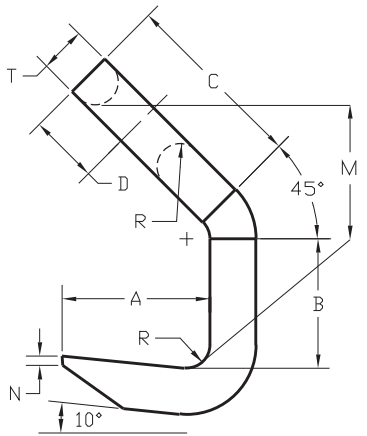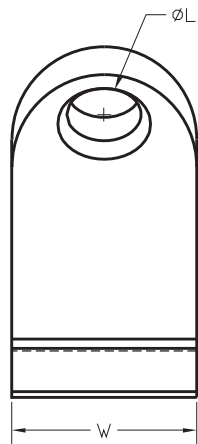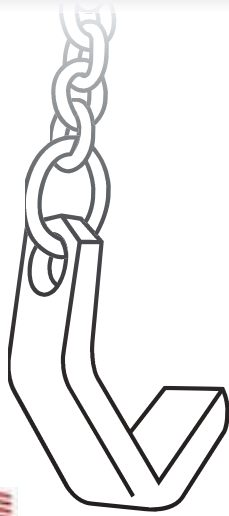

## Standard Plate Hook



| Stock # | Chain Size |    | Dimensions (Inches) |       |       |       |       |        |       |       |       |       | Lbs. Per Each | WLL (Lbs.) |
|---------|------------|----|---------------------|-------|-------|-------|-------|--------|-------|-------|-------|-------|---------------|------------|
|         | Inches     | MM | A                   | B     | C     | D     | L     | M      | N     | T     | W     | R     |               |            |
| PHA028  | 9/32       | 7  | 2.000               | 1.750 | 2.500 | 0.930 | 1.000 | 3.680  | 0.120 | 0.630 | 2.500 | 0.310 | 2.8           | 4,200      |
| PHA038  | 3/8        | 10 | 2.625               | 3.000 | 4.310 | 1.180 | 1.120 | 6.380  | 0.180 | 0.750 | 2.750 | 0.380 | 5.7           | 7,400      |
| PHA050  | 1/2        | 13 | 3.500               | 4.000 | 4.380 | 1.500 | 1.500 | 7.370  | 0.250 | 1.000 | 3.500 | 0.500 | 11.9          | 13,000     |
| PHA063  | 5/8        | 16 | 4.375               | 5.000 | 5.430 | 1.870 | 1.880 | 9.250  | 0.310 | 1.250 | 5.000 | 0.630 | 25.8          | 20,400     |
| PHA075  | 3/4        | 20 | 5.188               | 6.000 | 6.500 | 2.380 | 2.250 | 10.880 | 0.380 | 1.500 | 5.750 | 0.750 | 42.0          | 30,000     |
| PHA088  | 7/8        | 22 | 6.000               | 7.000 | 7.630 | 2.500 | 2.630 | 13.130 | 0.430 | 1.750 | 6.000 | 0.880 | 62.6          | 40,000     |



DO NOT EXCEED CAPACITY!  
See the CAUTIONS & WARNINGS section before using these products. Pages 134-145.





316 Stainless Steel Components

Round Rings 

Welded, electropolished and proof tested.

| Stock # | Trade Size |    | Dimensions (Inches) |       | Lbs. Per Each | Working Load Limit (Lbs.) |
|---------|------------|----|---------------------|-------|---------------|---------------------------|
|         | Inches     | MM | A                   | B     |               |                           |
| RMS038  | 3/8        | 10 | 0.380               | 2.000 | 0.23          | 750                       |
| RMS050  | 1/2        | 13 | 0.500               | 2.500 | 0.62          | 1,300                     |
| RMS063  | 5/8        | 16 | 0.630               | 3.000 | 1.20          | 1,850                     |
| RMS075  | 3/4        | 20 | 0.750               | 4.000 | 1.85          | 2,800                     |
| RMS100  | 1          | 26 | 1.000               | 4.000 | 4.00          | 5,650                     |
| RMS125  | 1-1/4      | 32 | 1.250               | 5.000 | 7.80          | 7,650                     |
| RMS150  | 1-1/2      | 38 | 1.500               | 6.000 | 11.70         | 9,700                     |

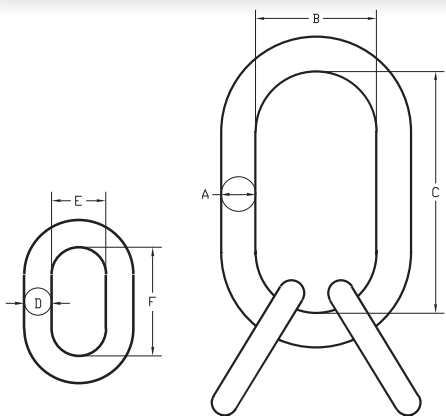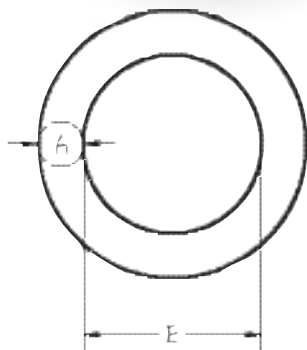

Sub-Assemblies 


Welded, electropolished and proof tested.

| Stock # | Chain Size |     | Dimensions (Inches) |       |        |       |       |       | Lbs. Per Each | Working Load Limit (Lbs.) |
|---------|------------|-----|---------------------|-------|--------|-------|-------|-------|---------------|---------------------------|
|         | In.        | MM  | A                   | B     | C      | D     | E     | F     |               | @ 60°                     |
| SMS019  | 3/16       | 5.5 | 0.630               | 2.750 | 5.500  | 0.380 | 0.880 | 1.500 | 2.00          | 2,850                     |
| SMS025  | 1/4        | 6   | 0.750               | 3.000 | 6.000  | 0.500 | 1.000 | 2.000 | 2.90          | 3,225                     |
| SMS038  | 3/8        | 10  | 1.000               | 3.500 | 7.000  | 0.750 | 1.500 | 3.000 | 7.10          | 6,875                     |
| SMS050  | 1/2        | 13  | 1.250               | 4.000 | 8.000  | 0.880 | 2.000 | 3.500 | 12.50         | 11,675                    |
| SMS063  | 5/8        | 16  | 1.500               | 5.250 | 10.500 | 1.120 | 2.500 | 5.000 | 15.00         | 15,575                    |



S-Hooks 

| Stock # | Trade Size | Dimensions (Inches) |        |       |       | Lbs. Per Each | Working Load Limit (Lbs.) |
|---------|------------|---------------------|--------|-------|-------|---------------|---------------------------|
|         | Inches     | A                   | B      | C     | D     |               |                           |
| SHS025  | 1/4        | 0.250               | 2.750  | 0.750 | 0.380 | 0.07          | 75                        |
| SHS038  | 3/8        | 0.380               | 4.130  | 1.130 | 0.560 | 0.33          | 165                       |
| SHS050  | 1/2        | 0.500               | 5.500  | 1.500 | 0.750 | 0.59          | 325                       |
| SHS063  | 5/8        | 0.630               | 7.000  | 1.880 | 0.940 | 1.23          | 500                       |
| SHS075  | 3/4        | 0.750               | 8.250  | 2.250 | 1.130 | 2.31          | 660                       |
| SHS088  | 7/8        | 0.880               | 9.630  | 2.630 | 1.310 | 3.05          | 900                       |
| SHS100  | 1          | 1.000               | 11.000 | 3.000 | 1.500 | 4.98          | 1,060                     |

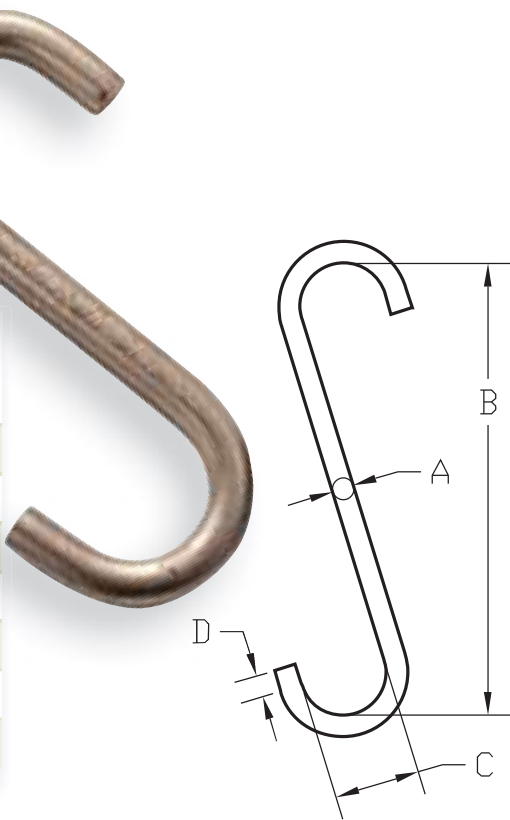





# 316 STAINLESS STEEL COMPONENTS

## Foundry Sorting Hooks




Welded, electropolished and proof tested.

| Stock # | Trade Size (Inches) | Dimensions (Inches) |       |       |       |       | Lbs. Per Each | Working Load Limit (Lbs.) |
|---------|---------------------|---------------------|-------|-------|-------|-------|---------------|---------------------------|
|         |                     | A                   | B     | C     | D     | E     |               |                           |
| SFS050  | 1/2                 | 0.500               | 6.000 | 0.560 | 3.000 | 1.500 | 0.70          | 200                       |
| SFS063  | 5/8                 | 0.630               | 6.000 | 0.560 | 3.000 | 1.500 | 1.11          | 300                       |
| SFS075  | 3/4                 | 0.750               | 6.000 | 0.750 | 3.000 | 1.500 | 1.52          | 500                       |
| SFS100  | 1                   | 1.000               | 6.000 | 0.750 | 3.000 | 1.500 | 2.94          | 900                       |
| SFS125  | 1-1/4               | 1.250               | 6.000 | 1.000 | 3.000 | 1.500 | 5.16          | 1,500                     |

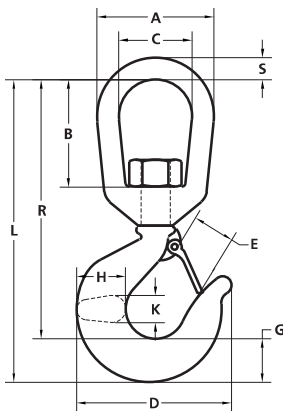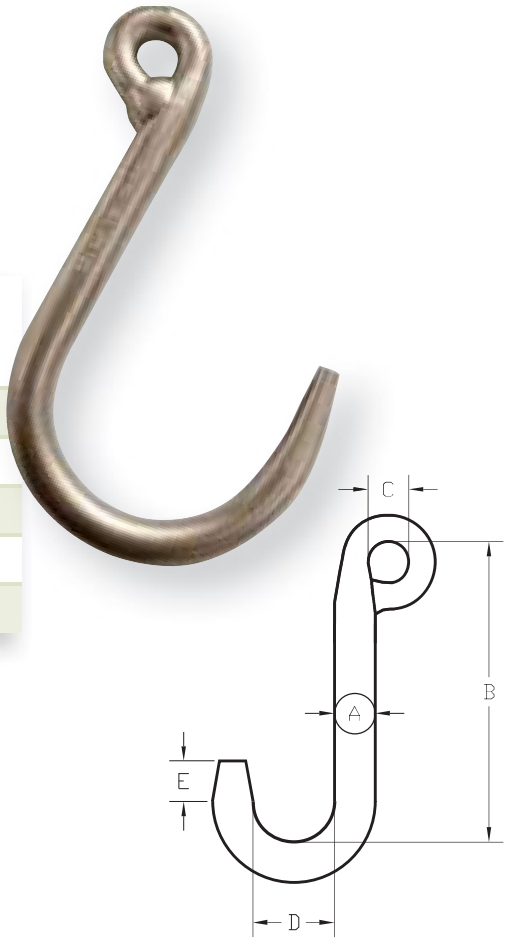

## Swivel Hooks

| Stock # | Dimensions (Inches) |       |       |       |       |       |       |       |       |       |       | Lbs. Per Ea. | WLL (Lbs.) |
|---------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------------|------------|
|         | A                   | B     | C     | D     | E     | G     | H     | K     | L     | R     | S     |              |            |
| SWS2L   | 2.000               | 1.460 | 1.180 | 3.000 | 0.780 | 0.880 | 0.880 | 0.560 | 5.230 | 4.350 | 0.410 | 0.88         | 1,000      |
| SWS3L   | 2.500               | 1.970 | 1.380 | 3.190 | 0.910 | 0.880 | 0.970 | 0.630 | 6.080 | 5.200 | 0.560 | 1.50         | 1,500      |
| SWS4L   | 2.500               | 1.970 | 1.380 | 3.560 | 0.980 | 1.060 | 1.120 | 0.720 | 6.570 | 5.510 | 0.560 | 2.03         | 2,000      |
| SWS5L   | 2.820               | 2.400 | 1.560 | 3.880 | 1.090 | 1.200 | 1.310 | 0.810 | 7.510 | 6.310 | 0.670 | 2.82         | 2,500      |

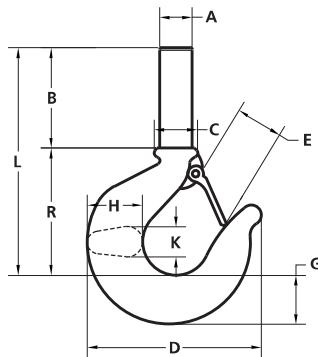

## Shank Hooks

| Stock # | Dimensions (Inches) |       |       |       |       |       |       |       |       |       | Lbs. Per Ea. | WLL (Lbs.) |
|---------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------------|------------|
|         | A                   | B     | C     | D     | E     | G     | H     | K     | L     | R     |              |            |
| SHS2L   | 0.560               | 2.000 | 0.690 | 3.000 | 0.780 | 0.880 | 0.880 | 0.560 | 5.000 | 2.310 | 0.66         | 1,000      |
| SHS3L   | 0.610               | 2.250 | 0.750 | 3.190 | 0.910 | 0.880 | 0.970 | 0.630 | 5.500 | 2.440 | 0.83         | 1,500      |
| SHS4L   | 0.720               | 2.500 | 0.880 | 3.560 | 0.980 | 1.060 | 1.120 | 0.720 | 6.250 | 2.750 | 1.42         | 2,000      |
| SHS5L   | 0.840               | 2.700 | 1.000 | 3.880 | 1.090 | 1.200 | 1.310 | 0.810 | 6.970 | 3.060 | 1.92         | 2,500      |



DO NOT EXCEED CAPACITY!  
See the CAUTIONS & WARNINGS section before using these products. Pages 134-145.




Insulated Swivel Hook



Protect your crane, hoist, and fork lift batteries from costly repairs or replacement as a result of electrical arcing. The electrically insulated hook eliminates current flow that can damage hoists and lifting equipment.

STANDARD FEATURES

- Extensive product offerings from 4,000 to 40,000 Lbs. WLL
- Arcing protection up to 2,000 volts
- Rated safe up to 225 degrees F.
- ISO4000 incorporates free turning SKF bearing to easily position work under load
- More economical than similar competitors' offerings
- ASME B30.10 compliant with a 4:1 design factor
- Individually proof tested 2:1, serialized and test certificate supplied
- Made in the USA

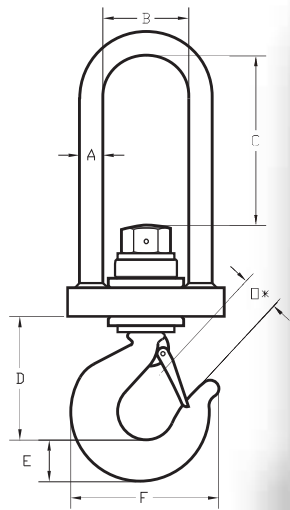

| Stock # | Dimensions (Inches) |       |        |       |       |        |       | Lbs. Per Each | WLL (Lbs.) |
|---------|---------------------|-------|--------|-------|-------|--------|-------|---------------|------------|
|         | A                   | B     | C      | D     | E     | F      | O*    |               |            |
| IS04000 | 0.630               | 2.250 | 4.380  | 3.688 | 1.150 | 4.120  | 1.120 | 6.0           | 4,000      |
| IS08000 | 0.750               | 2.500 | 5.000  | 3.880 | 1.430 | 4.940  | 1.340 | 8.8           | 8,000      |
| IS12000 | 1.000               | 3.000 | 6.500  | 4.750 | 1.810 | 6.500  | 1.780 | 18.4          | 12,000     |
| IS20000 | 1.380               | 4.000 | 7.630  | 6.430 | 2.560 | 8.680  | 2.250 | 50.0          | 20,000     |
| IS40000 | 1.750               | 6.000 | 10.380 | 9.500 | 3.630 | 13.630 | 3.630 | 119.3         | 40,000     |

\*Dimension O is clearance under safety latch

# All of this and More from a Single Source

ALLOY FORGINGS • CARGO CONTROL • BELOW THE HOOK

## PEERLESS

A KITO GROUP COMPANY

peerlesschain.com

1/4 TON CAP



DO NOT EXCEED CAPACITY!  
See the CAUTIONS & WARNINGS section before using these products. Pages 134-145.

TRANSPORT HOOKS

Forged Hooks

NOT FOR OVERHEAD LIFTING

Transport (T80) Clevis Grab Hook - Domestic




| Stock #      | Chain<br>Size<br>(Inches) | Dimensions (Inches) |       |       |       | Qty.<br>Per<br>Pkg. | Lbs.<br>Per<br>Each | Working Load Limit |       |
|--------------|---------------------------|---------------------|-------|-------|-------|---------------------|---------------------|--------------------|-------|
| UPC Tagged   |                           | A                   | B     | C     | D     |                     |                     | Lbs.               | Kgs.  |
| Self-Colored |                           |                     |       |       |       |                     |                     |                    |       |
| 8024215      | 1/4                       | 0.310               | 0.380 | 0.330 | 1.880 | 10                  | 0.42                | 3,500              | 1,588 |
| 8024315      | 5/16                      | 0.380               | 0.440 | 0.390 | 2.380 | 10                  | 0.72                | 4,500              | 2,041 |
| 8024415      | 3/8                       | 0.450               | 0.500 | 0.500 | 2.630 | 10                  | 1.14                | 7,100              | 3,221 |
| 8024615      | 1/2                       | 0.590               | 0.660 | 0.590 | 3.310 | 10                  | 2.32                | 12,000             | 5,443 |
| 8024815      | 5/8                       | 0.750               | 0.780 | 0.750 | 3.940 | 5                   | 4.08                | 18,100             | 8,210 |



Transport (T80) Clevis Grab Hook

| Stock #    | Chain<br>Size<br>(Inches) | Dimensions (Inches) |       |       |       | Qty.<br>Per<br>Pkg. | Lbs.<br>Per<br>Each | Working Load Limit |       |
|------------|---------------------------|---------------------|-------|-------|-------|---------------------|---------------------|--------------------|-------|
| UPC Tagged |                           | A                   | B     | C     | D     |                     |                     | Lbs.               | Kgs.  |
| Black      |                           |                     |       |       |       |                     |                     |                    |       |
| 8008450    | 3/8                       | 0.480               | 0.500 | 0.470 | 2.630 | 10                  | 1.00                | 7,100              | 3,220 |
| 8008650    | 1/2                       | 0.750               | 0.660 | 0.630 | 3.190 | 10                  | 2.20                | 12,000             | 5,443 |

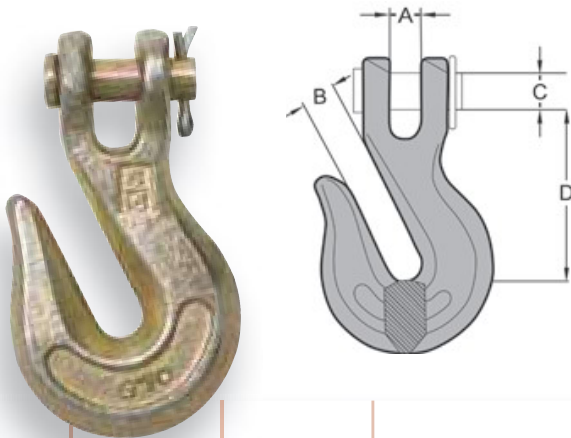

Transport (G70) Clevis Grab Hook

| Stock #          |               |         | Chain Size<br>(Inches) | Dimensions (Inches) |       |       |       | Qty. Per<br>Pkg. | Lbs. Per<br>Each | Working Load Limit |       |
|------------------|---------------|---------|------------------------|---------------------|-------|-------|-------|------------------|------------------|--------------------|-------|
| UPC<br>Tagged    | UPC<br>Tagged | Bulk    |                        | A                   | B     | C     | D     |                  |                  | Lbs.               | Kgs.  |
| Self-<br>Colored | Yellow Zinc   |         |                        |                     |       |       |       |                  |                  |                    |       |
| 8022215          | 8022230       | 8022255 | 1/4                    | 0.360               | 0.400 | 0.380 | 1.970 | 10               | 0.4              | 3,150              | 1,429 |
| 8022315          | 8022330       | 8022355 | 5/16                   | 0.380               | 0.440 | 0.440 | 2.340 | 10               | 0.72             | 4,700              | 2,132 |
| 8022415          | 8022430       | 8022455 | 3/8                    | 0.450               | 0.500 | 0.470 | 2.660 | 10               | 1.07             | 6,600              | 2,994 |
| 8022615          | 8022630       | 8022655 | 1/2                    | 0.750               | 0.620 | 0.630 | 3.280 | 5                | 2.16             | 11,300             | 5,127 |
| ---              | 8022855       | ---     | 5/8                    | 0.910               | 0.780 | 0.750 | 3.780 | 5                | 3.75             | 15,800             | 7,166 |



DO NOT EXCEED CAPACITY!  
See the CAUTIONS & WARNINGS section before using these products. Pages 134-145.



HARDWARE & INDUSTRIAL TRANSPORT HOOKS & LINKS

Forged Hooks & Connectors

NOT FOR OVERHEAD LIFTING

Transport (G70) Clevis Slip Hook - w/Latch

| Stock #     |            | Chain<br>Size<br>(Inches) | Dimensions (Inches) |       |       |       | Qty.<br>Per<br>Pkg. | Lbs.<br>Per<br>Each | Working Load<br>Limit |       |
|-------------|------------|---------------------------|---------------------|-------|-------|-------|---------------------|---------------------|-----------------------|-------|
| Bulk        | UPC Tagged |                           | A                   | B     | C     | D     |                     |                     | Lbs.                  | Kgs.  |
| Yellow Zinc |            |                           |                     |       |       |       |                     |                     |                       |       |
| 8015275     | 8015266    | 1/4                       | 0.440               | 0.750 | 0.380 | 2.610 | 10                  | 0.65                | 3,150                 | 1,429 |
| 8015375     | 8015366    | 5/16                      | 0.455               | 0.900 | 0.440 | 2.870 | 10                  | 0.87                | 4,700                 | 2,132 |
| 8015475     | 8015466    | 3/8                       | 0.545               | 1.135 | 0.470 | 3.310 | 10                  | 1.30                | 6,600                 | 2,994 |
| 8015675     | 8015666    | 1/2                       | 0.700               | 1.345 | 0.630 | 4.000 | 5                   | 2.85                | 11,300                | 5,127 |
| 8015875     | ---        | 5/8                       | 0.992               | 1.890 | 0.750 | 4.940 | 5                   | 5.30                | 15,800                | 7,166 |

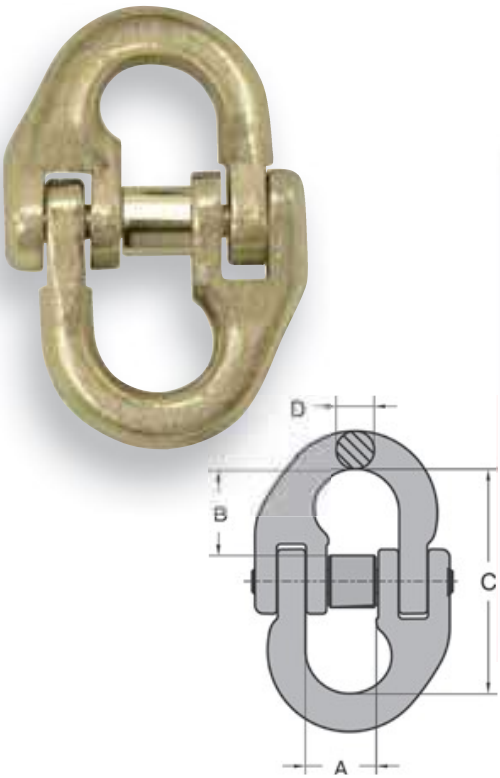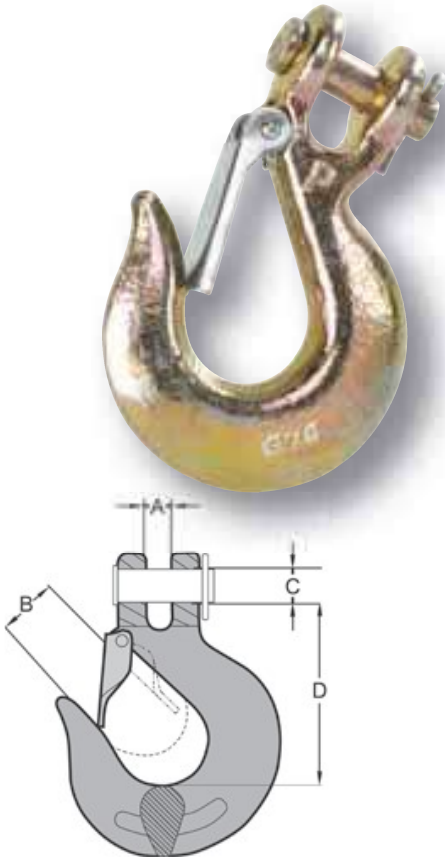


Transport (G70) Coupling Link

| Stock #     | Chain Size<br>(Inches) | Dimensions (Inches) |       |       |       | Qty.<br>Per<br>Pkg. | Lbs.<br>Per<br>Each | Working Load Limit |       |
|-------------|------------------------|---------------------|-------|-------|-------|---------------------|---------------------|--------------------|-------|
| UPC Tagged  |                        | A                   | B     | C     | D     |                     |                     | Lbs.               | Kgs.  |
| Yellow Zinc |                        |                     |       |       |       |                     |                     |                    |       |
| 8153055     | 1/4                    | 0.580               | 0.700 | 1.800 | 0.380 | 5                   | 0.28                | 3,150              | 1,429 |
| 8153155     | 5/16                   | 0.630               | 0.900 | 2.250 | 0.400 | 5                   | 0.58                | 4,700              | 2,132 |
| 8153255     | 3/8                    | 0.880               | 1.000 | 2.650 | 0.510 | 5                   | 0.75                | 6,600              | 2,994 |
| 8153355     | 1/2                    | 1.000               | 1.450 | 3.400 | 0.630 | 5                   | 1.60                | 11,300             | 5,127 |
| 8153455     | 5/8                    | 1.33                | 1.75  | 4.1   | 0.750 | 5                   | 2.50                | 15,800             | 7,166 |

Transport (G70) Double Clevis Link

Drop forged, quenched & tempered. Use with G70 chain.

| Stock #         |            | Chain Size<br>(Inches) | Dimensions (Inches) |       |       |       | Qty.<br>Per<br>Pkg. | Lbs.<br>Per<br>Each | Working Load<br>Limit |       |
|-----------------|------------|------------------------|---------------------|-------|-------|-------|---------------------|---------------------|-----------------------|-------|
| Bulk            | UPC Tagged |                        | A                   | R     | D     | G     |                     |                     | Lbs.                  | Kgs.  |
| Yellow Chromate |            |                        |                     |       |       |       |                     |                     |                       |       |
| 8057235         | 8057230    | 1/4-5/16               | 0.470               | 1.180 | 0.380 | 0.430 | 10                  | 0.33                | 4,700                 | 2,132 |
| 8057435         | 8057430    | 3/8                    | 0.530               | 1.400 | 0.450 | 0.480 | 10                  | 0.60                | 6,600                 | 2,994 |
| ---             | 8057530    | 3/8-5/16               | 0.510               | 1.400 | 0.440 | 0.450 | 10                  | 0.57                | 6,600                 | 2,994 |
| 8057635         | 8057630    | 7/16-1/2               | 0.650               | 1.750 | 0.560 | 0.630 | 10                  | 1.00                | 11,300                | 5,127 |

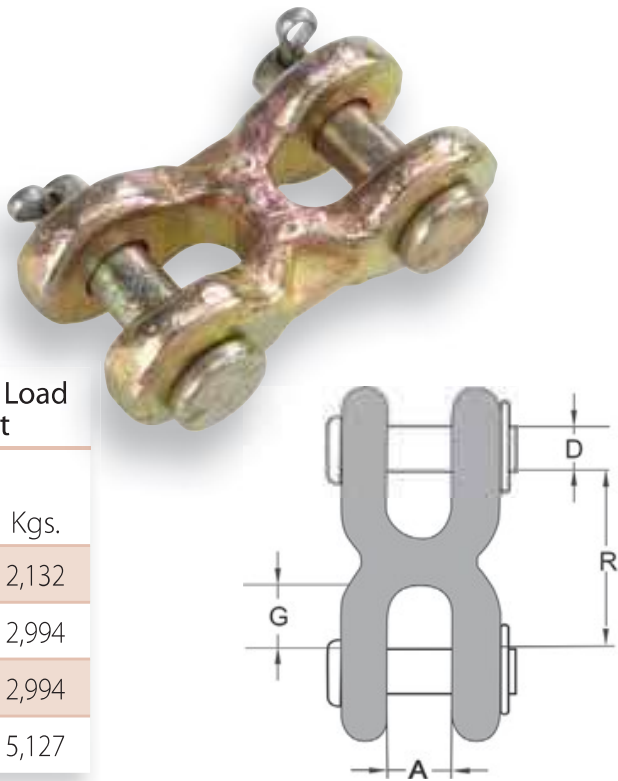


CHAIN ACCESSORIES

CLEVIS & EYE TYPE HOOKS


G43 Clevis Grab Hook

| Stock #    |         |         | Chain Size (In.) | Dimensions (Inches) |       |       |       | Qty. Per Pkg | Lbs. Per Each | Working Load Limit |       |
|------------|---------|---------|------------------|---------------------|-------|-------|-------|--------------|---------------|--------------------|-------|
| UPC Tagged |         | Bulk    |                  | A                   | B     | C     | C     |              |               | Lbs.               | Kgs.  |
| Self Color | Zinc    |         |                  |                     |       |       |       |              |               |                    |       |
| 8023215    | 8023230 | 8023235 | 1/4              | 0.360               | 0.400 | 0.380 | 1.970 | 10           | 0.47          | 2,600              | 1,179 |
| 8023315    | 8023330 | 8023335 | 5/16             | 0.400               | 0.440 | 0.440 | 2.260 | 10           | 0.75          | 3,900              | 1,769 |
| 8023415    | 8023430 | 8023435 | 3/8              | 0.480               | 0.500 | 0.470 | 2.630 | 10           | 1.10          | 5,400              | 2,450 |
| 8023615    | 8023630 | 8023635 | 1/2              | 0.750               | 0.660 | 0.630 | 3.190 | 10           | 2.52          | 9,200              | 4,173 |

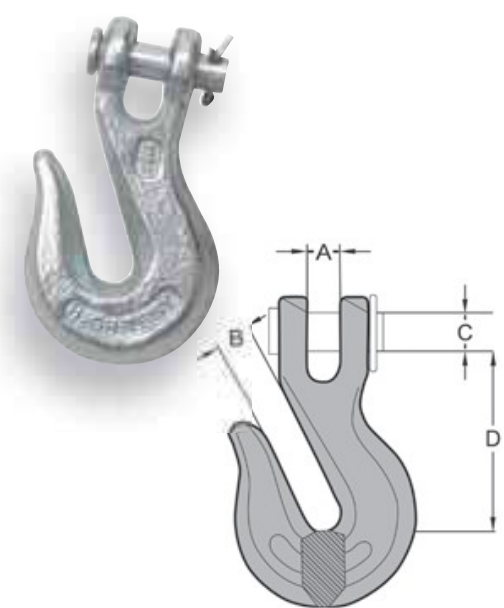

G43 Clevis Slip Hook - w/Latch

| Stock #    |         | Chain Size<br>(Inches) | Dimensions (Inches) |       |       |       | Qty.<br>Per<br>Pkg. | Lbs.<br>Per<br>Each | Working Load<br>Limit |       |
|------------|---------|------------------------|---------------------|-------|-------|-------|---------------------|---------------------|-----------------------|-------|
| UPC Tagged | Bulk    |                        | A                   | B     | C     | D     |                     |                     | Lbs.                  | Kgs.  |
| Zinc       |         |                        |                     |       |       |       |                     |                     |                       |       |
| 8016266    | 8016275 | 1/4                    | 0.440               | 0.790 | 0.380 | 2.560 | 10                  | 0.59                | 2,600                 | 1,179 |
| 8016366    | 8016375 | 5/16                   | 0.500               | 0.930 | 0.440 | 2.870 | 10                  | 0.93                | 3,900                 | 1,769 |
| 8016466    | 8016475 | 3/8                    | 0.590               | 1.140 | 0.470 | 3.250 | 10                  | 1.30                | 5,400                 | 2,450 |
| 8016666    | 8016675 | 1/2                    | 0.750               | 1.420 | 0.630 | 4.000 | 5                   | 3.21                | 9,200                 | 4,173 |

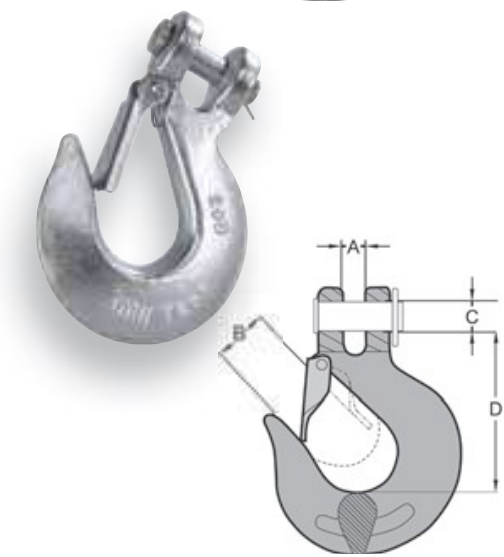

G43 Clevis Slip Hook

| Stock #    |         | Chain Size<br>(Inches) | Dimensions (Inches) |       |       |       | Qty.<br>Per<br>Pkg. | Lbs.<br>Per<br>Each | Working Load<br>Limit |       |
|------------|---------|------------------------|---------------------|-------|-------|-------|---------------------|---------------------|-----------------------|-------|
| UPC Tagged | Bulk    |                        | A                   | B     | C     | D     |                     |                     | Lbs.                  | Kgs.  |
| Zinc       |         |                        |                     |       |       |       |                     |                     |                       |       |
| 8013230    | 8013235 | 1/4                    | 0.440               | 0.940 | 0.370 | 2.560 | 10                  | 0.45                | 2,600                 | 1,179 |
| 8013330    | 8013335 | 5/16                   | 0.500               | 1.060 | 0.440 | 2.870 | 10                  | 0.69                | 3,900                 | 1,769 |
| 8013430    | 8013435 | 3/8                    | 0.590               | 1.310 | 0.470 | 3.250 | 10                  | 1.10                | 5,400                 | 2,450 |
| 8013630    | 8013635 | 1/2                    | 0.750               | 1.690 | 0.630 | 4.000 | 10                  | 2.45                | 9,200                 | 4,173 |



G43 Eye Grab Hook

| Stock #    |         |         | Chain Size<br>(Inches) | Dimensions (Inches) |       |       | Qty.<br>Per<br>Pkg. | Lbs.<br>Per<br>Each | Working Load<br>Limit |       |
|------------|---------|---------|------------------------|---------------------|-------|-------|---------------------|---------------------|-----------------------|-------|
| UPC Tagged |         | Bulk    |                        | A                   | B     | C     |                     |                     | Lbs.                  | Kgs.  |
| Self Color | Zinc    |         |                        |                     |       |       |                     |                     |                       |       |
| 8025215    | 8025230 | 8025235 | 1/4                    | 0.310               | 1.900 | 0.340 | 10                  | 0.28                | 2,600                 | 1,179 |
| 8025315    | 8025330 | 8025335 | 5/16                   | 0.400               | 2.250 | 0.440 | 10                  | 0.45                | 3,900                 | 1,769 |
| 8025415    | 8025430 | 8025435 | 3/8                    | 0.440               | 2.620 | 0.500 | 10                  | 0.79                | 5,400                 | 2,450 |
| 8025615    | 8025630 | 8025635 | 1/2                    | 0.560               | 3.380 | 0.660 | 10                  | 1.80                | 9,200                 | 4,173 |




TRANSPORT HOOKS & LINKS

Chain Accessories

NOT FOR OVERHEAD LIFTING

G43 Eye Slip Hook - w/Latch

| Stock#        | Chain<br>Size<br>(Inches) | Dimensions (Inches) |       |       |       | Qty.<br>Per<br>Pkg. | Lbs.<br>Per<br>Each | Working Load Limit |       |
|---------------|---------------------------|---------------------|-------|-------|-------|---------------------|---------------------|--------------------|-------|
| UPC<br>Tagged |                           | A                   | B     | C     | D     |                     |                     | Lbs.               | Kgs.  |
| Zinc          |                           |                     |       |       |       |                     |                     |                    |       |
| 8011275       | 1/4                       | 0.500               | 2.500 | 0.670 | 0.600 | 10                  | 0.42                | 2,600              | 1,179 |
| 8011375       | 5/16                      | 0.630               | 2.830 | 0.800 | 0.690 | 10                  | 0.72                | 3,900              | 1,769 |
| 8011475       | 3/8                       | 0.740               | 3.370 | 0.850 | 0.580 | 10                  | 1.03                | 5,400              | 2,450 |
| 8011675       | 1/2                       | 0.950               | 4.270 | 1.360 | 1.270 | 10                  | 2.45                | 9,200              | 4,173 |




G43 Eye Slip Hook

| Stock #    |         | Chain<br>Size<br>(In.) | Dimensions (Inches) |       |       | Qty.<br>Per<br>Pkg | Lbs.<br>Per<br>Each | Working Load Limit |       |
|------------|---------|------------------------|---------------------|-------|-------|--------------------|---------------------|--------------------|-------|
| UPC Tagged | Bulk    |                        | A                   | B     | C     |                    |                     | Lbs.               | Kgs.  |
| Zinc       |         |                        |                     |       |       |                    |                     |                    |       |
| 8011230    | 8011235 | 1/4                    | 0.500               | 2.560 | 0.940 | 10                 | 0.40                | 2,600              | 1,179 |
| 8011330    | 8011335 | 5/16                   | 0.640               | 2.780 | 1.040 | 10                 | 0.70                | 3,900              | 1,769 |
| 8011430    | 8011435 | 3/8                    | 0.720               | 3.360 | 1.310 | 10                 | 1.00                | 5,400              | 2,450 |
| 8011630    | 8011635 | 1/2                    | 0.960               | 4.030 | 1.630 | 10                 | 2.40                | 9,200              | 4,173 |

G43 Double Clevis Link

| Stock #    | Chain<br>Size<br>(Inches) | Dimensions (Inches) |       |       |       | Qty.<br>Per<br>Pkg. | Lbs.<br>Per<br>Each | Working<br>Load Limit |       |
|------------|---------------------------|---------------------|-------|-------|-------|---------------------|---------------------|-----------------------|-------|
| UPC Tagged |                           | A                   | R     | D     | G     |                     |                     | Lbs.                  | Kgs.  |
| Zinc       |                           |                     |       |       |       |                     |                     |                       |       |
| 8027235    | 1/4-5/16                  | 0.470               | 1.180 | 0.380 | 0.430 | 10                  | 0.30                | 3,900                 | 1,769 |
| 8027435    | 3/8                       | 0.530               | 1.340 | 0.470 | 0.480 | 10                  | 0.40                | 5,400                 | 2,450 |
| 8027635    | 7/16-1/2                  | 0.650               | 1.750 | 0.560 | 0.630 | 10                  | 0.98                | 9,200                 | 4,173 |

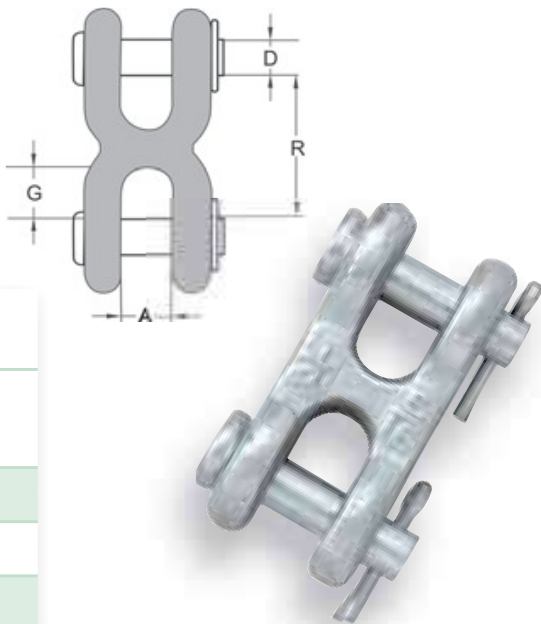

Weld-On Grab Hook

| Stock #    | Chain Size<br>(Inches) | Qty. Per<br>Pkg. | Working Load Limit |       |
|------------|------------------------|------------------|--------------------|-------|
| UPC Tagged |                        |                  | Lbs.               | Kgs.  |
| 8023490    |                        |                  | 5,400              | 2,450 |



DO NOT EXCEED CAPACITY!  
See the CAUTIONS & WARNINGS section before using these products. Pages 134-145.

# CHAIN ACCESSORIES   SHUTS, LINKS, CLIPS & S-HOOKS

## Spring Links


Low carbon steel. Fast, easy connection for permanent or temporary connection.

| Stock#     | Trade Size<br>(Inches) | Diameter |    | Length<br>(Inches) | Qty. Per<br>Pkg. | Lbs. Per<br>Each | Working Load Limit |      |
|------------|------------------------|----------|----|--------------------|------------------|------------------|--------------------|------|
| UPC Tagged |                        | Inches   | MM |                    |                  |                  | Lbs.               | Kgs. |
| Zinc       |                        |          |    |                    |                  |                  |                    |      |
| 4412240    | 1/8                    | 0.155    | 4  | 1.600              | 10               | 0.03             | 70                 | 30   |
| 4412840    | 3/16                   | 0.188    | 5  | 2.000              | 10               | 0.04             | 100                | 45   |
| 4410440    | 1/4                    | 0.240    | 6  | 2.375              | 10               | 0.06             | 175                | 79   |
| 4410640    | 9/32                   | 0.276    | 7  | 2.750              | 10               | 0.09             | 225                | 102  |
| 4410240    | 5/16                   | 0.310    | 8  | 3.125              | 10               | 0.16             | 350                | 159  |
| 4426040    | 11/32                  | 0.350    | 9  | 3.500              | 10               | 0.23             | 400                | 181  |
| 4425240    | 3/8                    | 0.393    | 10 | 4.000              | 10               | 0.32             | 425                | 193  |
| 4426140    | 7/16                   | 0.433    | 11 | 4.750              | 10               | 0.45             | 750                | 340  |
| 4427140    | 1/2                    | 0.465    | 12 | 5.560              | 10               | 0.55             | 1,200              | 544  |




## Hitch Pin Clips

| Stock # |                  | Trade<br>Size | Wire<br>Diameter<br>(Inches) | Dimensions (Inches) |                   |                | Qty.<br>Per<br>Pkg. | Lbs.<br>Per<br>Each |
|---------|------------------|---------------|------------------------------|---------------------|-------------------|----------------|---------------------|---------------------|
| Bulk    | UPC<br>(Per Bag) |               |                              | Gauge               | Overall<br>Length | Shaft Diameter |                     |                     |
| Zinc    |                  |               |                              |                     |                   |                |                     |                     |
| 3440335 | 3450335          | 3             | 0.091                        | 11                  | 1.630             | 1/4 to 1/2     | 50                  | 0.01                |
| 3440635 | 3450635          | 6             | 0.177                        | 5                   | 3.380             | 5/8 to 1       | 14                  | 0.05                |
| 3440735 | 3450735          | 7             | 0.091                        | 11                  | 2.310             | 1/4 to 5/8     | 50                  | 0.10                |
| 3440835 | 3450835          | 8             | 0.177                        | 5                   | 3.750             | 7/8 to 1-1/4   | 20                  | 0.60                |
| 3440935 | 3450935          | 9             | 0.148                        | 7                   | 2.450             | 3/4 to 1-1/8   | 20                  | 0.33                |
| 3441135 | ---              | 11            | 0.125                        | 8                   | 2.620             | 7-16 to 3/4    | 36                  | 0.18                |
| 3441935 | 3451935          | 19            | 0.243                        | 3                   | 4.060             | 1 to 1-1/2     | 12                  | 0.12                |

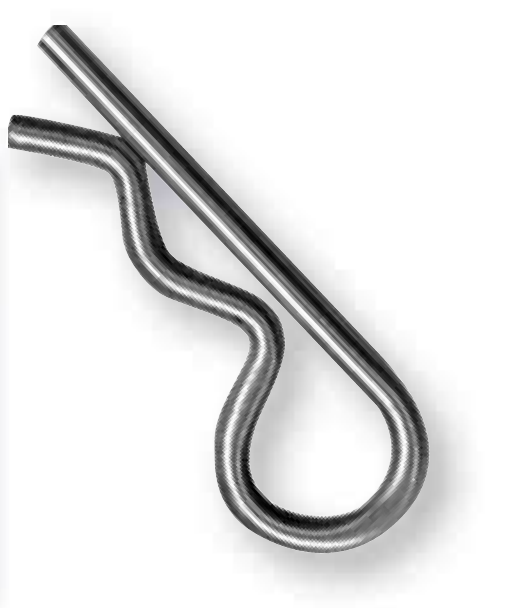


## S-Hooks - Low Carbon Steel

| Stock#  |            | Hook<br>No. | S-Hook<br>Type | Diameter<br>(Inches) |                  | Qty. Per<br>Pkg. | Lbs.<br>Per<br>Each | Working Load Limit |      |
|---------|------------|-------------|----------------|----------------------|------------------|------------------|---------------------|--------------------|------|
| Bulk    | UPC Tagged |             |                | Wire<br>Dia.         | Inside<br>Length |                  |                     | Lbs.               | Kgs. |
| Zinc    |            |             |                |                      |                  |                  |                     |                    |      |
| 7902735 | 7992735    | 27          | II             | 0.080                | 1.000            | 1,000            | 0.01                | 12                 | 5    |
| 7906335 | 7996335    | 63          | II             | 0.105                | 1.000            | 1,000            | 0.01                | 31                 | 14   |
| 7900835 | 7990835    | 8           | II             | 0.120                | 1.000            | 1,000            | 0.01                | 46                 | 21   |
| 7904335 | ---        | 43          | II             | 0.120                | 1.000            | 1,000            | 0.01                | 48                 | 22   |
| 7900935 | 7990935    | 9           | II             | 0.162                | 1.000            | 1,000            | 0.02                | 106                | 48   |
| 7949835 | 7999835    | 498         | II             | 0.120                | 1.500            | 1,000            | 0.01                | 28                 | 13   |
| 7901035 | 7991035    | 10          | I              | 0.135                | 1.500            | 1,000            | 0.02                | 25                 | 11   |
| 7900635 | 7990635    | 6           | I              | 0.192                | 1.500            | 1,000            | 0.03                | 70                 | 32   |
| 7911035 | ---        | 110         | II             | 0.192                | 1.500            | 1,000            | 0.03                | 117                | 53   |
| 7900435 | 7990435    | 4           | I              | 0.225                | 1.500            | 1,000            | 0.05                | 129                | 59   |
| 7901435 | 7991435    | 14          | I              | 0.187                | 2.000            | 1,000            | 0.04                | 53                 | 24   |
| 7953235 | 7993235    | 532         | I              | 0.249                | 2.000            | 1,000            | 0.07                | 142                | 64   |
| 7952635 | 7992635    | 526         | II             | 0.249                | 2.000            | 500              | 0.07                | 189                | 86   |
| 7962935 | 7992935    | 629         | II             | 0.312                | 2.000            | 500              | 0.12                | 375                | 170  |
| 7901735 | 7991735    | 17          | I              | 0.312                | 2.500            | 500              | 0.14                | 255                | 116  |
| 7901835 | ---        | 18          | I              | 0.375                | 2.500            | 250              | 0.21                | 457                | 207  |
| 7906635 | 7996635    | 66          | II             | 0.375                | 2.500            | 250              | 0.22                | 428                | 194  |

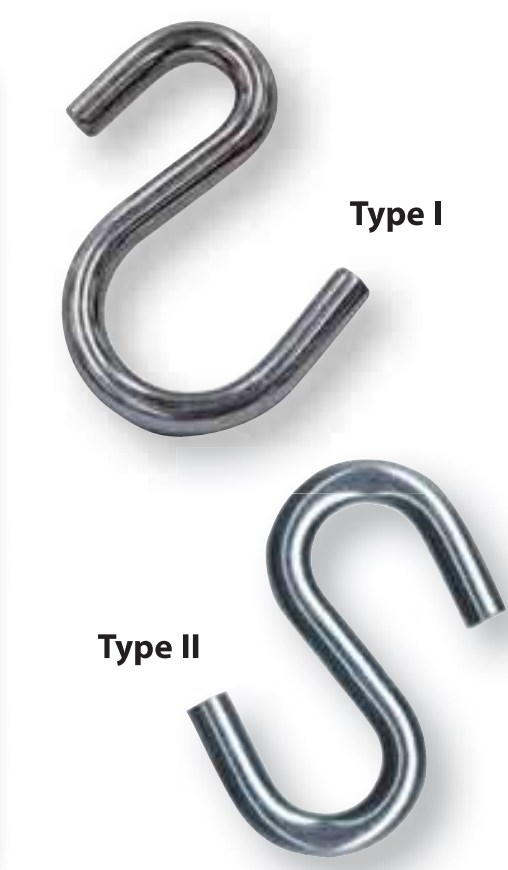


NOT FOR  
OVERHEAD  
LIFTING



Oval Connecting Links

| Stock #   | Trade<br>Size<br>(Inches) | Dimensions<br>(Inches) |       | Qty. Per<br>Pkg. | Lbs. Per<br>Each | Working<br>Load Limit |       |
|-----------|---------------------------|------------------------|-------|------------------|------------------|-----------------------|-------|
| UPC       |                           | A                      | B     |                  |                  | Lbs.                  | Kgs.  |
| HDG       |                           |                        |       |                  |                  |                       |       |
| 440840403 | 1/4                       | 0.880                  | 0.440 | 10               | 0.06             | 1,300                 | 590   |
| 440840503 | 5/16                      | 0.940                  | 0.500 | 10               | 0.11             | 1,900                 | 862   |
| 440840603 | 3/8                       | 1.200                  | 0.560 | 10               | 0.18             | 2,650                 | 1,202 |
| 440840802 | 1/2                       | 1.440                  | 0.660 | 10               | 0.36             | 4,500                 | 2,042 |
| 6800035   | 5/8                       | 1.810                  | 0.780 | 60               | 0.75             | 10,800                | 4,900 |


NOT FOR  
OVERHEAD  
LIFTING

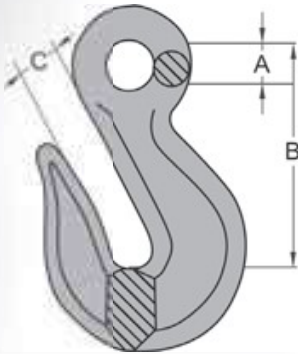

G30 Eye Grab Hooks

| Stock #   | Trade Size<br>(Inches) | Dimensions (Inches) |       |       | Qty. Per Pkg. |  | Working Load Limit |       |
|-----------|------------------------|---------------------|-------|-------|---------------|---------------------------------------------------------------------------------------|--------------------|-------|
| UPC       |                        | A                   | B     | C     |               |                                                                                       | Lbs.               | Kgs.  |
| HDG       |                        |                     |       |       |               |                                                                                       |                    |       |
| 440242442 | 5/16                   | 0.600               | 2.180 | 0.360 | 10            | 0.52                                                                                  | 1,900              | 862   |
| 440242443 | 3/8                    | 0.710               | 2.630 | 0.430 | 10            | 0.78                                                                                  | 2,650              | 1,202 |
| 440242445 | 1/2                    | 0.920               | 3.400 | 0.560 | 5             | 1.60                                                                                  | 4,500              | 2,042 |

NOT FOR  
OVERHEAD  
LIFTING

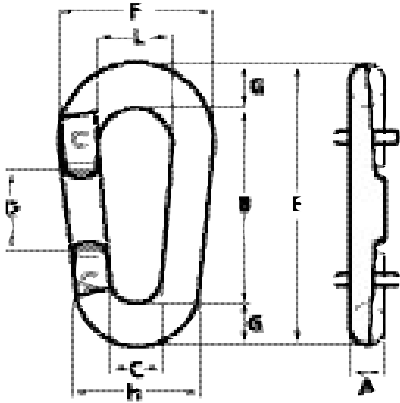

Pear Shaped Connecting Links

| Stock # | Trade<br>Size<br>(Inches) | Dimensions (Inches) |       |       |       |       |       |       |       |       | Qty.<br>Per<br>Pkg. | Lbs.<br>Per<br>Each | Working Load Limit |       |
|---------|---------------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|---------------------|---------------------|--------------------|-------|
| HDG     |                           | A                   | B     | C     | E     | D     | F     | G     | H     | L     |                     |                     | Lbs.               | Kgs.  |
|         |                           |                     |       |       |       |       |       |       |       |       |                     |                     |                    |       |
| 6800023 | 3/8                       | 0.440               | 2.010 | 0.560 | 2.950 | 0.830 | 1.660 | 0.470 | 1.440 | 0.780 | 200                 | 0.31                | 2,250              | 1,021 |
| 6800021 | 1/2                       | 0.500               | 2.490 | 0.690 | 3.630 | 1.000 | 2.000 | 0.570 | 1.720 | 1.000 | 100                 | 0.56                | 4,000              | 1,815 |

