

Weatherly #148

27.12 (Industrial)

August 2022

Supersedes 27.12 (Industrial) | April, 2019



PEERLESS®

A KITO GROUP COMPANY

2023

OVERHEAD LIFTING



CARGO CONTROL



HARDWARE



MARINE



Visit Us Online: www.peerlesschain.com | 800.873.1916

CHAIN ACCESSORIES

Snaps

Snaps - Brass Finish

Stock #	Dimensions (Inches)		Type*	Qty. Per Pkg.	Lbs. Per Each
UPC Tagged	Eye Dia.	Overall Lgth.			
Brass					
4433440	9/16	3-1/4	Swivel Eye Bolt Snap (B)	20	0.15
4415340	3/4	3-5/8	Round Eye Quick Snap (B)	20	0.17
4415140	1-1/8	2-3/4	Swivel Eye Trigger Snap (F)	20	0.12
4433240	3/4	3-1/8	Swivel Eye Bolt Snap (J)	20	0.15
4415240	1	3-1/2	Swivel Eye Bolt Snap (J)	10	0.17
4414840	1-1/8	4-5/8	Swivel Eye Bolt Snap (J)	10	0.34
4424840	3/8	3-1/2	Double End Bolt Snap (P)	20	0.14
4426740	1/2	3	Swivel Eye Bolt Snap	20	0.09
4433340	11/16	4-3/8	Swivel Eye Boat Snap (B)	20	0.32

*See page 103.

Snaps - Zinc Finish

Stock #	Dimensions (Inches)		Type*	Qty. Per Pkg.	Lbs. Per Each
UPC Tagged	Eye Dia.	Overall Lgth.			
Zinc					
4426540	3/8	2-15/16	Swivel Eye Bolt Snap (J)	20	0.09
4426640	5/8	4-1/4	Swivel Eye Bolt Snap (J)	20	0.14
4414240	3/8	3-1/8	Open End Swivel Snap (G)	20	0.07

*See page 103.

Snaps - Multi-Colored Finish

Stock #	Dimensions (Inches)		Type*	Qty. Per Pkg.	Lbs. Per Each
UPC Tagged	Eye Dia.	Overall Lgth.			
Multi-Colored					
4427040	-	3	Anodized Spring Link (Q)	25	0.05
4428640	--	3	Camo Spring Link-Gear Clip (Q)	25	0.05


*See page 103.




Anchor Rode Swivel

- Easy Swiveling Design
- Stainless Steel Pin Locks
- Grade 40 High Test Steel
- Hot Dip Galvanized

NOT FOR OVERHEAD LIFTING

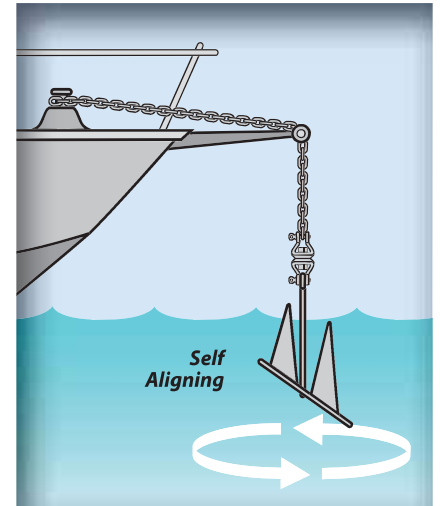

Stock #	Trade Size (Inches)	Qty. Per Pack- age	Lbs. Per Each	Working Load Limit	
UPC				Lbs.	Kgs.
HDG					
440640011	1/4-5/16	25	30	1,500	681

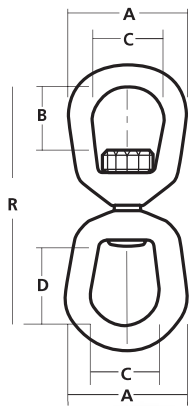

Forged Anchor Eye-Eye Swivels

Stock #	Trade Size (Inches)	Dimensions (Inches)					Qty. Per Pkg.	Lbs. Per Each	Working Load Limit	
		A	B	C	D	R			Lbs.	Kgs.
8170241	1/4	1.250	0.688	0.750	1.063	2.938	25	0.22	850	386
8170341	5/16	1.625	0.813	1.000	1.250	3.563	25	0.33	1,250	567
8170441	3/8	2.000	0.938	1.250	1.500	4.313	10	0.66	2,250	1,021
8170541	1/2	2.500	1.313	1.500	2.000	5.438	10	1.43	3,600	1,634
8170641	5/8	3.000	1.563	1.750	2.375	6.563	5	2.49	5,200	2,360
8170741	3/4	3.500	1.750	2.000	2.625	7.188	5	4.08	7,200	3,268
8170841	7/8	4.000	2.060	2.250	3.060	8.380	5	6.25	10,000	4,535
8170941	1	4.500	2.310	2.500	3.500	9.630	5	8.95	12,500	5,670




**NOT FOR
OVERHEAD
LIFTING**

**NOT FOR
OVERHEAD
LIFTING**



Forged Anchor Jaw-Eye Swivels

Stock #	Trade Size (Inches)	Dimensions (Inches)							Qty. Per Pkg.	Lbs. Per Each	Working Load Limit	
		A	B	C	K	D	Pin Dia.	R			Lbs.	Kgs.
8171241	1/4	1.250	0.688	0.750	0.469	0.875	0.250	2.625	25	0.21	850	386
8171341	5/16	1.625	0.813	1.000	0.500	0.875	0.313	2.938	25	0.32	1,250	567
8171441	3/8	2.000	0.938	1.250	0.625	1.063	0.375	3.625	10	0.61	2,250	1,021
8171541	1/2	2.500	1.313	1.500	0.750	1.313	0.500	4.500	10	1.24	3,600	1,634
8171641	5/8	3.000	1.563	1.750	0.938	1.500	0.625	5.313	5	2.56	5,200	2,360
8171741	3/4	3.500	1.750	2.000	1.125	1.750	0.750	6.063	5	4.17	7,200	3,268
8171841	7/8	4.000	2.060	2.250	1.190	2.060	0.880	7.000	5	5.87	10,000	4,535
8171941	1	4.500	2.310	2.500	1.750	2.810	1.130	8.560	5	9.84	12,500	5,670

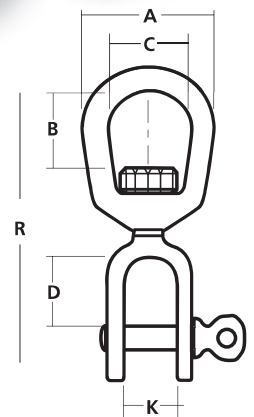

DO NOT EXCEED CAPACITY!
See the CAUTIONS & WARNINGS section before using these products. Pages 134-145.